

INDUSTRIAL FLASHLIGHTS

TOUGH LIGHTING TOOLS



SINCE 1976

5 SERIES FLASHLIGHTS

WITH SLIDE-BEAM, FLOOD TO SPOT TECHNOLOGY

Flood Beam



Spot Beam



LOCAL TO LONG DISTANCE IN A SLIDE


Our new 5 Series flashlights feature flood to spot technology: The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.

Up to 250
yards of
long distance
visibility in
SPOT MODE

Up to 78° beam
spread in
FLOOD MODE

Proprietary
optimized lens
makes a clean
collimated beam
spread for FLOOD
and SPOT MODES

CNC machine
tracked bearing
surface allows for
a smooth glide

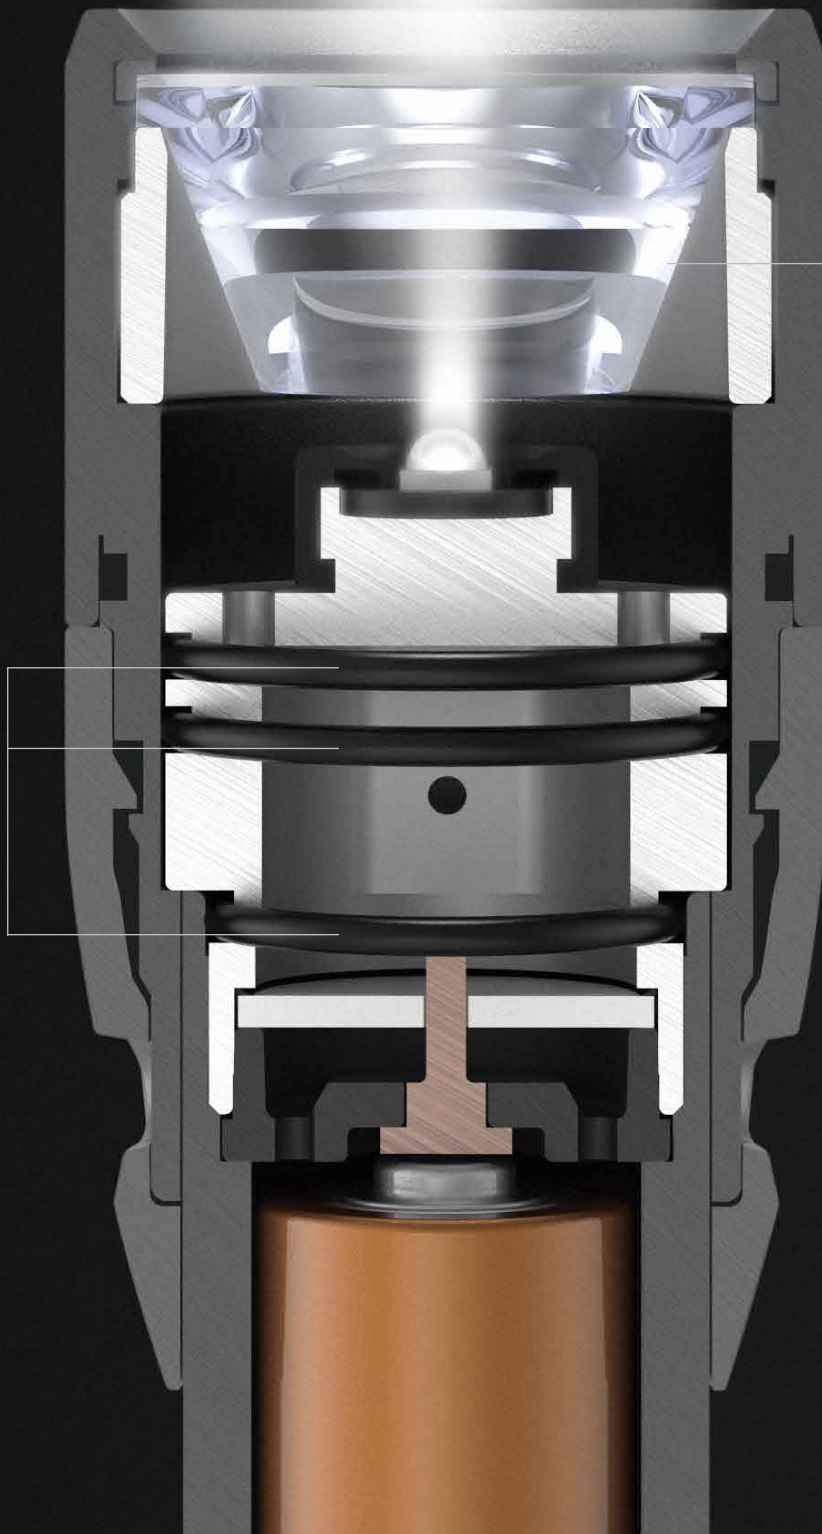



SLIDE AND CONQUER




STAY IN FRONT OF THE DARK

Get the industry's first flashlights with a tail switch that has an embedded battery status indicator to

stop guessing in the dark. Also, with the 5050R's built in USB (Output) and Micro USB (Input) ports, you'll get a full charge for your flashlight or emergency back-up power for smart phones and other electronics. Reload the 5000, 5010 and 5020 flashlights with fresh alkaline batteries to see the job through.

5050R flashlight features built-in USB and Micro USB ports

THUMB THROUGH DECAF TO EXTRA CAFFEINATED LED POWER



Low, medium, high, flashing or boost mode options let

you switch to the best light intensity, from low lumens that are easy on the eyes when up close, to super-bright intensity for reaching way out in the dark. And with the type II hard anodized finish, the 5 Series flashlights are as tough as they look.






LED POWER: TOOLS WITH VERSATILITY



PELICAN™ 5000 FLASHLIGHT



Slim design with tough steel clip, mounts to pockets or fits in tight spots for quick access.

BEAM DISTANCE//
Up To: 69m

LUMENS//
Up To: 202 Lumens

MODES//
High / Low /
Flashing

BATTERIES//
2 AAA Alkaline
Batteries
(Batteries Included)



PELICAN™ 5010 FLASHLIGHT



Get the best of both worlds. The 5010 is our medium sized flashlight that gives you the lumens, run time and size of the 5000 slim design, with the juggernaut performance of the 5050R flashlight.

BEAM DISTANCE//
Up To: 184m

LUMENS//
Up To: 392 Lumens

MODES//
High / Low / Flashing

BATTERIES//
2 AA Alkaline
Batteries
(Batteries Included)



PELICAN™ 5020 FLASHLIGHT



When you need extra beam distance, go with the 5020 flashlight. With up to 250 meters of beam distance and up to 586 lumens of LED brightness, you'll have enough light to see the full length of your facility.

BEAM DISTANCE//
Up To: 250m

LUMENS//
Up To: 586 Lumens

MODES//
High / Medium /
Low / Flashing

BATTERIES//
4 AAA Alkaline
Batteries
(Batteries Included)



PELICAN™ 5050R FLASHLIGHT



Get power for extra long shifts and your smartphone. Recharge the 5050R by connecting directly to its Micro USB port and get up to 40 hrs of runtime (on low power setting). The 5050R doubles as a portable charger (or power bank) for your smart phone with a USB power output.

The 5050R: it's our rechargeable option with flood to spot beam technology.

BEAM DISTANCE//
Up To: 201m

LUMENS//
Up To: 883 Lumens

MODES//
Boost / High /
Low / Flashing

BATTERIES//
Lithium Ion
Rechargeable
Battery (Included)

5 SERIES SPECIFICATIONS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI IP RATING
5000	2 AAA (Batteries Included)	2.4 oz (68 gr)	5.59" (14.2 cm)	202*, 21***	1h 15m*, 7h***	69m*, 21m***	IPX8
5010	2 AA (Batteries Included)	5.1 oz (145 gr)	6.26" (15.9 cm)	392*, 22***	2h 15m*, 26h***	184m*, 43m***	IPX8
5020	4 AAA (Batteries Included)	7.3 oz (207 gr)	5.87" (14.9 cm)	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250m*, 147**, 44m***	IPX8
5050R	Lithium-Ion Rechargeable (Included)	5.8 oz (164 gr)	6.16" (15.6 cm)	883 ^B , 393*, 21***	N/A ^B , 2h 30m*, 40h***	201m ^B , 134*, 30m***	IPX8

* High | ** Medium | *** Low | ^B Boost | *Refer to Pelican.com for full specs. For details go to www.pelican.com



PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE

Refer to www.pelican.com/warranty for full details.

©2018 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. Part No. 0030-5SB-000 SE/18

DISTRIBUTED BY: