



**PELICAN™**  
BUILT TO PROTECT™



**MAINTENANCE, TURNAROUNDS,  
AND PLANT PROJECTS**  
SAFETY CERTIFIED LIGHTING SOLUTIONS



SINCE 1976






## HEADLAMPS



## RIGHT ANGLE LIGHTING

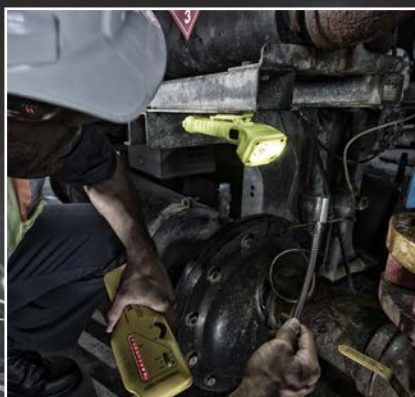

## REMOTE AREA LIGHTING SYSTEMS



# BRIGHTER • SAFER • CLEANER

When planning refinery turnarounds, several factors must be taken into consideration. Lighting, whether fixed or mobile, should be at the top of the list. Pelican offers multiple solutions for all stages of refinery turnarounds, general maintenance, and refractory services.

We are the leaders in safety certified portable lighting.

Our vast array of lighting tools range from LED headlamps to portable work lights (Remote Area Lighting Systems).



To find the right light for your job, visit us at [Pelican.com/safety](http://Pelican.com/safety) or call 1-866-583-0426



Underwriters  
Laboratory



Factory Mutual



Canadian Safety  
Health Administration

**IECEx**

International  
Electrotechnical  
Commission



Intertek  
3091325  
Electrical  
Testing  
Laboratories



SGS U.S. Testing  
Company



Certified  
Electrical Safety



ATEX Europe



## REMOTE AREA LIGHTING SYSTEMS (RALS)

- Quiet
- No need for fuel or diesel
- Eliminates loss of primary containment (LOPC)
- Improves worker efficiency
- Increases worker safety
- No heat/No exhaust
- No trip hazard

9455



9460



9490



	BATTERIES (included)	WEIGHT (with Batteries)	LENGTH (Extended Height)	LUMENS	RUN TIME	BEAM SPREAD	LEDs	HEADS	CERTIFICATIONS
9455	Rechargeable NiMH	16 lbs. (7.3 kg)	31.50" (80)	1600*, 800***	5h*, 10h***	125°	10	1	CI D1, IECEx ia, ATEX Zone 0
9460	12v Rechargeable, Sealed Lead Acid	61 lbs. (27.7 kg)	79.50" (201.9 cm)	12000* (variable)	3h*, 24h***	120°	10 per head	2	N/A
9490	12v Rechargeable, Sealed Lead Acid	32 lbs. (14.5 kg)	72.00" (182.9 cm)	6000*	3h 30m*, 12h**, 24h***	125°	10 per head	1	N/A

## FLASHLIGHTS

2315



3315



3415M



	BATTERIES	WEIGHT WITH BATTERIES (kg)	LENGTH (cm)	LUMENS	RUN TIME	CERTIFICATIONS
2315	2 AA Alkaline (included)	4.6 oz. (0.13)	6.22" (15.8)	115	6h	CI II III D1, IECEx ia
3315	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	160	19h	CI II III D1, IECEx ia
3415M	3 AA Alkaline	9.6 oz. (0.27)	7.44" (18.9)	336 <sup>SF</sup> , 177 <sup>F</sup> , 186 <sup>S</sup>	6h <sup>SF</sup> , 15h <sup>F</sup> , 14h <sup>S</sup>	CI II III D1, IECEx ia

<sup>SF</sup> Spot/Flood | <sup>F</sup> Flood | <sup>S</sup> Spot

## HEADLAMP

2765



	BATTERIES	WEIGHT WITH BATTERIES (kg)	LENGTH (cm)	LUMENS	RUN TIME	CERTIFICATIONS
2765	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	105*, 104**, 65***, 33****	4h 15m*, 4h**, 6h 15m***, 9h 30m****	CI D1, IECEx ia

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast



# SEE OUR FULL LINE OF PRODUCTS AT PELICAN.COM



## PELICAN LIGHTING TOOLS

- Safety Certified lights for hazardous locations
- Specialized lights for fire and rescue operations
- Headlamps
- Submersible lights for diving
- Law Enforcement duty lights



## PELICAN REMOTE AREA LIGHTS

- Solid-state mounted LEDs
- Portable
- Multi-directional lamp heads
- Up to 15 hours of run time
- Rechargeable
- Safety Certified



## PELICAN PROTECTOR CASES

- Watertight, dustproof, crushproof
- Micro Cases for small electronics
- Specialized laptop and tool organization solutions for off site jobs
- Ruggedized shipping cases for transporting oversize items

# PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE

Refer to [www.pelican.com/warranty](http://www.pelican.com/warranty) for full details.

**DISTRIBUTED BY:**