



PELI™

# LIGHTING SYSTEMS CATALOGUE



## LIGHTS

<b>INTRODUCTION</b>	<b>4-9</b>
Performance Torches	6
Glossary of terms	7
Safety	8
<b>PRODUCTS</b>	<b>10-23</b>
Industrial Lights	10
ATEX Lights	14
Tactical Lights	20
HeadLamps	22
<b>SPECIFICATIONS</b>	<b>24-29</b>
<b>ACCESSORIES &amp; FEATURES</b>	<b>30-33</b>
Modlight Pivot	30

## RALS

<b>INTRODUCTION</b>	<b>34-37</b>
Features	36
<b>PRODUCTS</b>	<b>38-43</b>
<b>SPECIFICATIONS &amp; ACCESSORIES</b>	<b>44-47</b>



When you're in a situation that requires a lighting tool, you want to make sure you have the right one. Since 1976, PELI has illuminated the world's darkest and most dangerous places with specialised, professional lighting tools, including ATEX approved models, to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools enable you to accomplish your tasks in a safer and more efficient manner. Engineered in the U.S and Guaranteed for Life.

# LIGHTS

# PERFORMANCE PELI TORCHES

## STANDARDS AND RATINGS (APPLICABLE TO TORCHES ONLY)



### LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



### RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



### BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").




### PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



### WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



### WATER PROOF/SUBMERSIBLE

**Water Proof // IPX7** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.

**Submersible // IPX8** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

## ANSI STANDARDS (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

## GLOSSARY OF TERMS

### CANDELA

A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

### LUX

The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

### LUMEN

A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.


### INTEGRATING SPHERE

An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

### IP (INGRESS PROTECTION)

These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

### RECHARGEABLE

Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon .

# SAFETY IN EUROPE



## IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exact requirements of the European ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

CE  II 1G EX IA OP IS IIC T4 GA

ATEX code corresponding to the 1975Z0 torch



Need more information about ATEX? Please visit [www.peli.com/atex](http://www.peli.com/atex)



Download our poster on ATEX Directive 2014/34/EU.



### COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATIONS


HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	Oil Refinery Paint Warehouse Offshore Oil Rig Spray Booth	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
			Division 2 (Hazard Not Likely)	Category 3 / Zone 2 (Hazard Not Likely)	
CLASS II	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	Coal Mine Grain Silo Munitions Factory Hay Storage Facility	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	↓
			Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III	Ignitable Fibers & Flyings (Machined Magnesium)	Paper Mill Woodworking Facility Textile Mill Cotton Gin	Division 1 (Hazard Likely)	N/A	LEAST
			Division 2 (Hazard Not Likely)	N/A	

\* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS		EUROPEAN CLASSIFICATIONS	
<b>Division 1</b> Where volatile substances can exist all of the time or some of the time under normal operating conditions.	<b>Division 2</b> Where volatile substances are not likely to exist under normal operating conditions.	<b>Category 1 / Zone 0</b> Flammable material present for long periods (more than 1.000 hours* a year).	<b>Category 3 / Zone 2</b> Flammable material present for short periods (less than 10 hours* a year).
		<b>Category 2 / Zone 1</b> Flammable material present in normal operation (10- 1.000 hours* a year).	

\* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

### DIAGRAM OF CLASS / DIVISIONS / ZONES

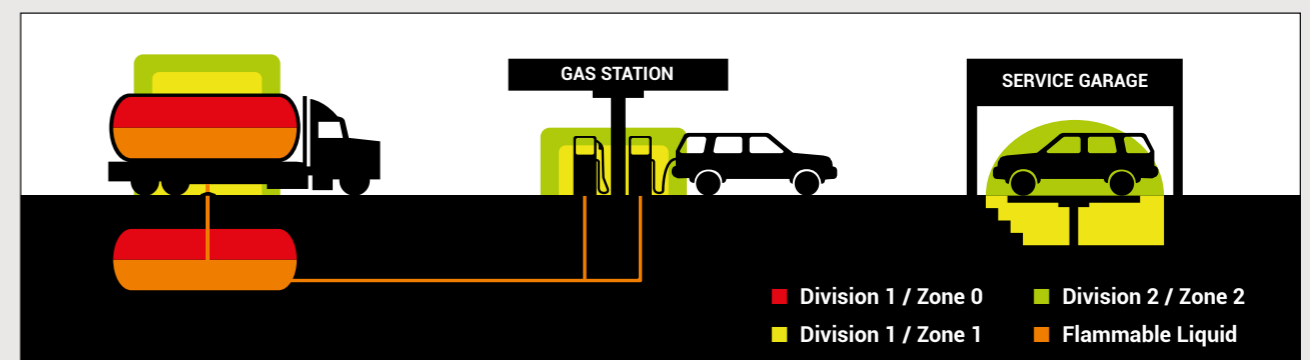

# INDUSTRIAL LIGHTS

Engineered for the toughest jobs, Peli industrial lights are designed to deliver unmatched reliability when it matters most. Built with ultra-durable materials, these hand-held lights withstand extreme conditions, from intense heat to heavy impact. With options like photoluminescent "glow-in-the-dark" bodies, you'll never struggle to locate your light in low-visibility situations. Compact enough to clip to a helmet or fit in a pocket, they're the ultimate companion for professionals who need powerful, portable illumination on demand.

SEE ALL



## 1910

**LIGHT SOURCE**  
LED

**BATTERIES**  
1 AAA Alkaline (included)

**LENGTH**  
9.7 cm (3.8")

**MODES**  
High / Low



UP TO	LUMENS	RUN TIME
	106	4h

## 1930 L1™

**LIGHT SOURCE**  
LED

**BATTERIES**  
4 LR 44 Alkaline (included)

**LENGTH**  
6.7 cm (2.64")

**CERTIFICATIONS**  
Cl, D1/CII, D2 IECEx ia



LUMENS	RUN TIME
12	4h 15m

## 1920

**LIGHT SOURCE**  
LED

**BATTERIES**  
2 AAA Alkaline (included)

**LENGTH**  
14.0 cm (5.5")

**MODES**  
High / Low



UP TO	LUMENS	RUN TIME
	224	8h 45m

## 2010 SABRELITE™

**LIGHT SOURCE**  
LED


**BATTERIES**  
3 C Alkaline (not included)

**LENGTH**  
20.6 cm (8.11")

**CERTIFICATIONS**  
Cl II III, D1 IECEx ia



LUMENS	RUN TIME
161	22h



### 2410 STEALTHLITE™

LIGHT SOURCE  
LED

BATTERIES  
4 AA Alkaline (included)

LENGTH  
17.8 cm (7")

CERTIFICATIONS  
C1 II III, D1 IECEx ia



LUMENS	RUN TIME
183	5h 45m

### 2460 STEALTHLITE™



LIGHT SOURCE  
LED

BATTERIES  
4 NiMH (included)

LENGTH  
17.8 cm (7")

CERTIFICATIONS  
C1 II, D2



LUMENS	RUN TIME
183	5h

### 3310PL PHOTOLUMINESCENT

LIGHT SOURCE  
LED

BATTERIES  
3 AA Alkaline (included)

LENGTH  
15.6 cm (6.14")

MODES  
High / Low / Flashing  
(torch body glows in the dark)

■ (Photoluminescent)



UP TO	LUMENS	RUN TIME
	378	202h

### 3310ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE  
LED

BATTERIES  
3 AA Alkaline (included)

LENGTH  
15.6 cm (6.14")

INCLUDES  
3310PL and Wall Mountable Case  
(torch body glows in the dark)

■ (Photoluminescent)



UP TO	LUMENS	RUN TIME
	378	202h

### 5000\*

LIGHT SOURCE  
LED

BATTERIES  
2 AAA Alkaline

LENGTH  
14.2 cm (5.59")

MODES  
High / Low / Flashing

■



LUMENS	RUN TIME
202	7h



\* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.



### 9050 LED LANTERN

LIGHT SOURCE  
LED

BATTERIES  
2 18650 Lithium-ion (included)

LENGTH  
20,4 cm (8.03")

MODES  
High / Low / Flashing  
Flexible battery system

■



UP TO	LUMENS	RUN TIME
	3369	5h 30m

### THE VERSATILE LANTERN WITH A DUAL LITHIUM-ION/ALKALINE BATTERY SYSTEM

Holds up to 4 lithium-ion rechargeable batteries or up to 16 AA alkaline or NiMH batteries.





# ATEX LIGHTS


## ZONE 0 & 1 (CAT. 1 & 2)

Peli's extense range of Zone 0 and Zone 1 torches complies with the highest standards of the European ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.

SEE ALL



DOWNLOAD OUR POSTER ON ATEX DIRECTIVE 2014/34/EU.




MAGNETIC CLIP



RECHARGEABLE

### 1930Z0 L1™



LIGHT SOURCE  
LED

BATTERIES  
4 LR 44 Alkaline (included)


LENGTH  
6.7 cm (2.64")

CERTIFICATIONS  
II 1 G Ex ia op is IIC T6/T4 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	12	4h 15m

### 1975Z0 MITYLITE™



LIGHT SOURCE  
LED

BATTERIES  
2 AAA Alkaline (included)

LENGTH  
14.6 cm (5.75")

CERTIFICATIONS  
II 1 G Ex ia op is IIC T4 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	117	2h 15m

### 1975Z1 MITYLITE™



LIGHT SOURCE  
LED

BATTERIES  
2 AAA Alkaline (included)

LENGTH  
14.6 cm (5.75")

CERTIFICATIONS  
II 2 G Ex ib op is IIB T4 Gb



SAFETY CERTIFIED	LUMENS	RUN TIME
	94	8h 15m

### 2220Z1 VB3™



LIGHT SOURCE  
LED

BATTERIES  
2 CR2032 Lithium (included)

LENGTH  
8.9 cm (3.50")

CERTIFICATIONS  
II 2 G Ex ib op is IIC T6 Gb



SAFETY CERTIFIED	LUMENS	RUN TIME
	8	8h

### 2010Z0 SABRELITE™



LIGHT SOURCE  
LED

BATTERIES  
3 C Alkaline (not included)

LENGTH  
20.6 cm (8.11")

CERTIFICATIONS  
II 1G Ex ia op is IIC T4/T3 Ga




SAFETY CERTIFIED	LUMENS	RUN TIME
	129	22h

Photoluminescent 2013PL Shroud



### 2315Z0



LIGHT SOURCE  
LED

BATTERIES  
2 AA Alkaline (included)

LENGTH  
15.8 cm (6.22")

CERTIFICATIONS  
II 1 G Ex ia op is IIC T4 Ga,  
II 2 G Ex ib op is IIC T4 Gb




SAFETY CERTIFIED	LUMENS	RUN TIME
	115	6h

\* For more information on ATEX, see page 8-9



### 2610Z0 HEADSUP LITE™



**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)


**LENGTH**  
3.8 cm (1.49")

**CERTIFICATIONS**  
II 1 G Ex ia op is IIC T4 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	30	19h

### 2690Z0 HEADSUP LITE™



**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)


**LENGTH**  
7.1 cm (2.81")

**CERTIFICATIONS**  
I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIIC T65°C Da



SAFETY CERTIFIED	LUMENS	RUN TIME
	74	11h

### 2745Z0 HEADSUP LITE™



**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)

**LENGTH**  
5.7 cm (2.25")


**CERTIFICATIONS**  
II 1 G Ex ia op is IIC T4 Ga

**MODES**  
High / Low / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	33	40h

### 2410Z0 STEALTHLITE™



**LIGHT SOURCE**  
LED

**BATTERIES**  
4 AA Alkaline (included)

**LENGTH**  
17.8 cm (7")

**CERTIFICATIONS**  
II 1 G Ex ia IIC T4 Ga,  
II 1 D Ex ia IIIC T135°C Da



SAFETY CERTIFIED	LUMENS	RUN TIME
	153	5h 45m

### 2460Z1 STEALTHLITE™



**LIGHT SOURCE**  
LED

**BATTERIES**  
4 AA NiMH (included)


**LENGTH**  
17.8 cm (7")

**CERTIFICATIONS**  
II 2 G Ex ib IIC T4 Gb



SAFETY CERTIFIED	LUMENS	RUN TIME
	181	5h

### 2755Z0 HEADSUP LITE™



**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)

**LENGTH**  
5.7 cm (2.25")


**CERTIFICATIONS**  
II 1 G Ex ia op is IIC T4 Ga

**MODES**  
High / Low / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	115	16h

### 2765Z0 HEADSUP LITE™



**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)

**LENGTH**  
5.7 cm (2.25")

**CERTIFICATIONS**  
II 1 G Ex ia op is IIC T4 Ga


**MODES**  
High / Low / Downcast / Flashing




SAFETY CERTIFIED	LUMENS	RUN TIME
	141	14h

\* For more information on ATEX, see page 8-9

\* For more information on ATEX, see page 8-9



### 3315Z0




**LIGHT SOURCE**  
LED  
**BATTERIES**  
3 AA Alkaline (included)  
**LENGTH**  
15.6 cm (6.14")  
**CERTIFICATIONS**  
II 1 G Ex ia IIC T4 Ga,  
II 1 D Ex ia IIIC T130°C Da



SAFETY CERTIFIED	LUMENS	RUN TIME
	138	19h

### 3335RZ0



**LIGHT SOURCE**  
LED  
**BATTERIES**  
1 Lithium-Ion 18650 (included)  
**LENGTH**  
15.5 cm (6.11")  
**CERTIFICATIONS**  
III 1 G Ex ia IIC T4 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	246	58h

Right Angle  
accessory available



### 3765Z0




**LIGHT SOURCE**  
LED  
**BATTERIES**  
4 AA NiMH (included)  
**LENGTH**  
13.6 cm (5.36")  
**CERTIFICATIONS**  
II 1 G Ex ia op is IIC T3 Ga  
**MODES**  
High / Low / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	194	20h

### 9415Z0 LED LANTERN



**LIGHT SOURCE**  
LED  
**BATTERIES**  
4 C NiMH (included)  
**LENGTH**  
22.2 cm (8.75")  
**CERTIFICATIONS**  
II 1 G Ex ia IIC T4 Ga  
**MODES**  
High / Low / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	530	11h 30m

### 3415MZ0




**LIGHT SOURCE**  
LED  
**BATTERIES**  
3 AA Alkaline  
**LENGTH**  
18.9 cm (7.44")  
**CERTIFICATIONS**  
II 1 G Ex ia op is IIC T4 Ga  
**MODES**  
High / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	329	14h

### 3610Z0 LITTLE ED™




**LIGHT SOURCE**  
LED  
**BATTERIES**  
4 AA Alkaline (included)  
**LENGTH**  
19.1 cm (7.51")  
**CERTIFICATIONS**  
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



SAFETY CERTIFIED	LUMENS	RUN TIME
	153	5h 45m

### 3715Z0



**LIGHT SOURCE**  
LED  
**BATTERIES**  
4 AA Alkaline  
**LENGTH**  
13.6 cm (5.36")  
**CERTIFICATIONS**  
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da  
**MODES**  
High / Low / Downcast / Flashing




SAFETY CERTIFIED	LUMENS	RUN TIME
	189	31h

Photoluminescent  
3713PL Shroud



\* For more information on ATEX, see page 8-9

\* For more information on ATEX, see page 8-9



# TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.

SEE ALL



RECHARGEABLE



## 7000\*

**LIGHT SOURCE**  
LED

**BATTERIES**  
2 CR123 Lithium-Ion (included)

**LENGTH**  
13.5 cm (5.31")

**MODES**  
High / Medium / Low / Strobe

UP TO	LUMENS	RUN TIME
	774	13h



## 7060



**LIGHT SOURCE**  
LED

**BATTERIES**  
1 Lithium-Ion 18650 (included)

**LENGTH**  
22 cm (8.65")

**MODES**  
High / Strobe / Medium / Low / Self Programmable

UP TO	LUMENS	RUN TIME
	402	57h



## 7600



**LIGHT SOURCE**  
LED

**BATTERIES**  
1 Lithium-Ion 18650 (included)\*

**LENGTH**  
15.7 cm (6.19")

**MODES**  
High / Strobe / Medium / Low / Full Time Battery Level Indication

UP TO	LUMENS	RUN TIME
	944	29h



\*Multi-battery.  
Supports also 2 CR123

## 8060



**LIGHT SOURCE**  
LED

**BATTERIES**  
4 NiMH C (included)

**LENGTH**  
32.2 cm (12.67")

**MODES**  
High / Strobe / Medium / Low / Flashing / Self Programmable

UP TO	LUMENS	RUN TIME
	1072	60h



\* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.

# HEAD-LAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.

SEE ALL



GESTURE ACTIVATION CONTROL



RECHARGEABLE

## 2720 HEADLAMP



**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)

**LENGTH**  
6.3 cm (2.48")

**MODES**  
Variable Light Output /  
Dual Red LED Night Vision

UP TO	LUMENS	RUN TIME
	200	103h



## 2740 HEADLAMP

**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)

**LENGTH**  
5.7 cm (2.25")

**MODES**  
High / Low / Flashing / Red LED

UP TO	LUMENS	RUN TIME
	66	21h



## 2750 HEADLAMP

**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)

**LENGTH**  
5.7 cm (2.25")

**MODES**  
High / Low / Flashing /  
Red LED / Low Battery Warning

■ ■ (Photoluminescent)

UP TO	LUMENS	RUN TIME
	259	11h



## 2760 HEADLAMP

**LIGHT SOURCE**  
LED

**BATTERIES**  
3 AAA Alkaline (included)

**LENGTH**  
5.7 cm (2.25")

**MODES**  
High / Medium / Low /  
Downcast / Flashing / Red LED /  
Full-time Battery / Level Indicator

UP TO	LUMENS	RUN TIME
	289	11h



## 2780R HEADLAMP\*



**LIGHT SOURCE**  
LED

**BATTERIES**  
1 Lithium-Ion 18650 (included)

**LENGTH**  
7.6 cm (3.00")

**MODES**  
High / Medium / Low /  
Downcast / Spot / Flashing  
Full-time Battery Level Indicator

■ 3 Interchangeable Covers Included

UP TO	LUMENS	RUN TIME
	558	7h 30m

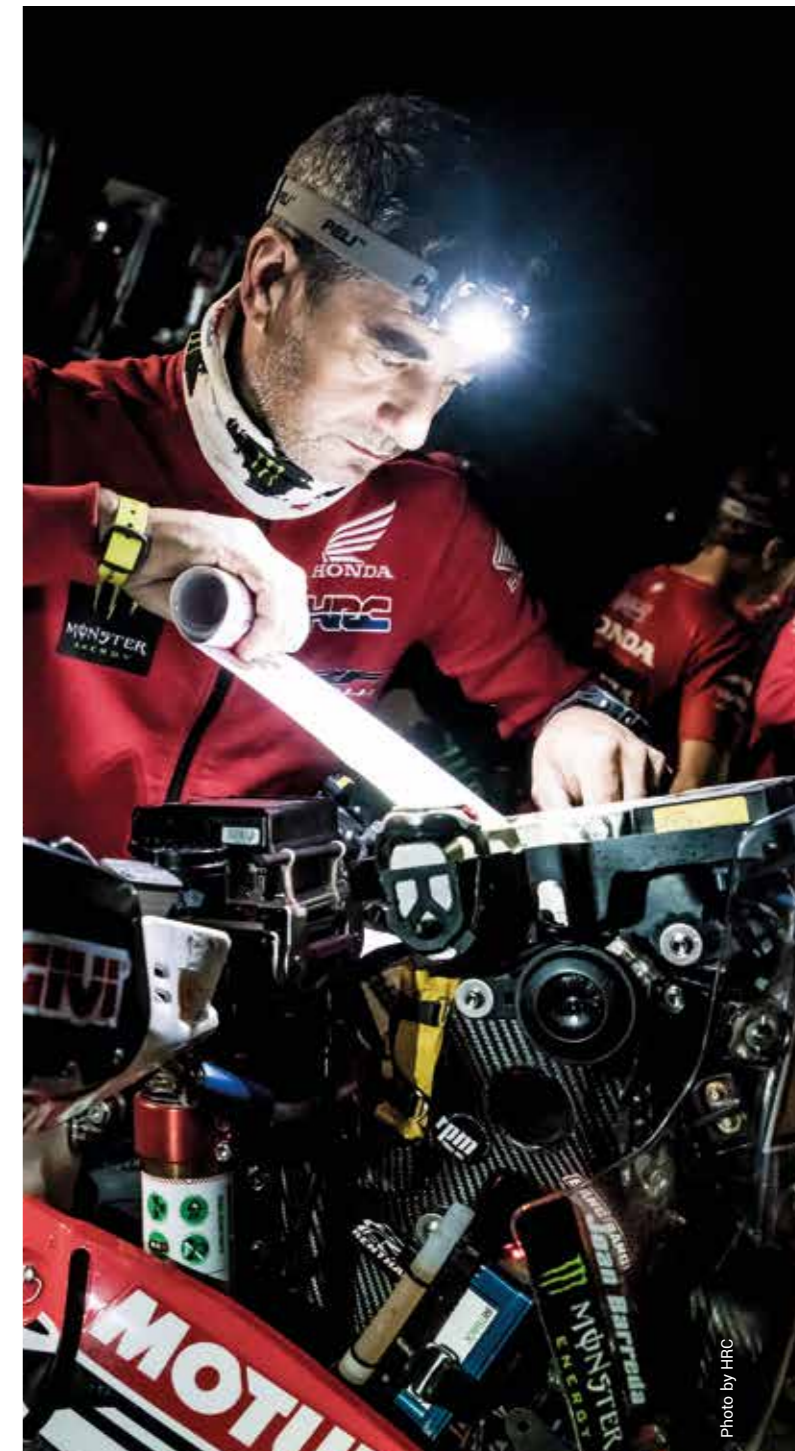


Photo by HRC

\* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.

# INDUSTRIAL LIGHTS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS	CAT. NO.
1910	1 AAA Alkaline <sup>A</sup>	0.043 kg	9.7 cm	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■	1910
1920	2 AAA Alkaline <sup>A</sup>	0.062 kg	14 cm	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■	1920
1930	4 LR 44 Alkaline <sup>A</sup>	0.026 kg	6.7 cm	12	4h 15m	17	70	IPX4	CI, D1/CII, D2 IECEx ia	■ ■	1930
2010	3 C Alkaline	0.38 kg	20.6 cm	161	22h	160	6398	IPX7	CI II III, D1 IECEx ia	■	2010
2410	4 AA Alkaline <sup>A</sup>	0.207 kg	17.8 cm	183	5h 45m	161	6500	IPX7	CI II III, D1 IECEx ia	■	2410
2460	4 Ni-MH <sup>A</sup>	0.221 kg	17.8 cm	183	5h	179	8050	IPX7	CI II, D2	■	2460
3310PL	3 AA Alkaline <sup>A</sup>	0.176 kg	15.6 cm	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)	3310PL
3310ELS	3 AA Alkaline <sup>A</sup>	0.176 kg	15.6 cm	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8 (1m)	N/A	■ (photoluminescent)	3310ELS
5000	2 AAA Alkaline <sup>A</sup>	0.068 kg	14.2 cm	202*, 21**	1h 15m*, 7h**	69*, 21**	1176*, 111**	IPX8 (1m)	N/A	■ <sup>B</sup>	5000
9050	2 18650 Lithium-Ion <sup>A</sup>	1.301 kg	20.4 cm	3369 (Spot/Flood), 1119 (Flood), 2623 (Spot)	2h 45m (Spot/Flood), 5h 30m (Flood), 4h 15m (Spot)	417 (Spot/Flood), 47 (Flood), 489 (Spot)	43568 (Spot/Flood), 559 (Flood), 59760 (Spot)	IP67	TBC	■	9050

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Boost | <sup>A</sup> Batteries Included | <sup>B</sup> This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information. Additional approvals may apply. For details go to [www.peli.com](http://www.peli.com)

LIGHTS SPECIFICATIONS

# ATEX TORCHES

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	APPROVALS	COLOURS	CAT. NO.
1930Z0	4 LR 44 Alkaline <sup>A</sup>	0.026 kg	6.7 cm	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	■	1930Z0
1975Z0	2 AAA Alkaline <sup>A</sup>	0.054 kg	14.6 cm	117	2h 15m	24	141	IP68	II 1 G Ex ia op is IIC T4 Ga	■	1975Z0
1975Z1	2 AAA Alkaline <sup>A</sup>	0.054 kg	14.6 cm	94	8h 15m	22	122	IP68	II 2 G Ex ib op is IIB T4 Gb	■	1975Z1
2010Z0	3 C Alkaline	0.38 kg	20.6 cm	129	22h	135	4582	IPX7	II 1G Ex ia op is IIC T4/T3 Ga	■	2010Z0
2220Z1	2 CR2032 Lithium <sup>A</sup>	0.028 kg	8.9 cm	8	8h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	■ ■	2220Z1
2315Z0	2 AA Alkaline <sup>A</sup>	0.13 kg	15.8 cm	115	6h	75	1403	IPX8	II 1 G Ex ia op is IIC T4 Ga, II 2 G Ex ib op is IIC T4 Gb	■	2315Z0
2410Z0	4 AA Alkaline <sup>A</sup>	0.207 kg	17.8 cm	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■	2410Z0
2460Z1	4 AA Ni-MH <sup>A</sup>	0.221 kg	17.8 cm	181	5h	181	8235	IPX7	II 2 G Ex ib IIC T4 Gb	■	2460Z1
2610Z0	3 AAA Alkaline <sup>A</sup>	0.91 kg	3.8 cm	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	II 1 G Ex ia op is IIC T4 Ga	■	2610Z0
2690Z0	3 AAA Alkaline <sup>A</sup>	0.116 kg	7.1 cm	74	11h	92	2124	IPX7	I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T65°C Da	■	2690Z0
2745Z0	3 AAA Alkaline <sup>A</sup>	0.94 kg	5.7 cm	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■	2745Z0
2755Z0	3 AAA Alkaline <sup>A</sup>	0.096 kg	5.7 cm	115*, 58***	8h*, 16h***	61*, 43***	925*, 455***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■	2755Z0
2765Z0	3 AAA Alkaline <sup>A</sup>	0.096 kg	5.7 cm	141*, 27****	5h30m*, 14h****	78*, 9****	1512*, 22****	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■	2765Z0
3315Z0	3 AA Alkaline <sup>A</sup>	0.176 kg	15.6 cm	138	19h	146	5350	IP67	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da	■	3315Z0
3335RZ0	1 Lithium-Ion 18650	0.130 kg	15.5 cm	246*, 30***	6h 15m*, 58h***	151*, 51***	5718*, 649***	IP67	III 1 G Ex ia IIC T4 Ga	■	3335RZ0
3415MZ0	3 AA Alkaline	0.272 kg	18.9 cm	329 (Spot/Flood), 174 (Flood), 185 (Spot)	6h (Spot/Flood), 15h (Flood), 14h (Spot)	133 (Spot/Flood), 38 (Flood), 134 (Spot)	4425 (Spot/Flood), 354 (Flood), 4517 (Spot)	IPX8 (1m)	II 1 G Ex ia op is IIC T4 Ga	■	3415MZ0
3610Z0	4 AA Alkaline	0.298 kg	19.1 cm	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■	3610Z0
3715Z0	4 AA Alkaline	0.408 kg	13.6 cm	189*, 90***, 23****	4h*, 7h***, 31h****	249*, 157***, 24****	15552*, 6150***, 150****	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da	■	3715Z0
3765Z0	4 AA NiMH <sup>A</sup>	0.414 kg	13.6 cm	194*, 92***, 24****	3h 30m*, 6h 45m***, 20h****	256*, 161***, 24****	16392*, 6454***, 146****	IPX4	II 1 G Ex ia op is IIC T3 Ga	■	3765Z0
9415Z0	4 C NiMH <sup>A</sup>	1.65 kg	22.2 cm	530*, 202***	4h 30m*, 11h 30m***	272*, 166***	18480*, 6914***	IPX4	II 1 G Ex ia IIC T4 Ga	■	9415Z0

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>A</sup> Batteries Included  
Additional approvals may apply. For details go to [www.peli.com](http://www.peli.com)

# TACTICAL LIGHTS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS	CAT. NO.
7000	2 CR123 Lithium <sup>A</sup>	0.159 kg	13.5 cm	774*, 457**, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■ <sup>B</sup>	7000
7060	1 Lithium-Ion 18650 <sup>A</sup>	0.295 kg	22 cm	402*, 162**, 18***	3h 30m*, 12h**, 57h***	210m*, 131m**, 45m***	11078*, 4312**, 500***	IPX4	N/A	■	7060
7600	1 Lithium-Ion 18650 <sup>A</sup>	0.196 kg	15.7 cm	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8 (1m)	N/A	■	7600
8060	4 C NiMH <sup>A</sup>	0.658 kg	32.2 cm	1072*, 551**, 29***	3h 45m*, 4h 15m**, 60h***	376*, 265**, 60***	35300*, 17520**, 889***	IPX6	N/A	■	8060

# HEADLAMPS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS	CAT. NO.
2720	3 AAA Alkaline <sup>A</sup>	0.108 kg	6.3 cm	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■	2720
2740	3 AAA Alkaline <sup>A</sup>	0.094 kg	5.7 cm	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■	2740
2750	3 AAA Alkaline <sup>A</sup>	0.096 kg	5.7 cm	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)	2750
2760	3 AAA Alkaline <sup>A</sup>	0.096 kg	5.7 cm	289*, 156**, 97***, 42****	1h 30m*, 3h 15m**, 5h 30m***, 11h****	101*, 66**, 48***, 19****	2540*, 1097**, 567***, 88****	IPX4	N/A	■	2760
2780R	1 Lithium-Ion 18650 <sup>A</sup>	0.207 kg	7.6 cm	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ <sup>B</sup>	2780R

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>A</sup> Batteries Included | <sup>B</sup> This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information. Additional approvals may apply. For details go to [www.peli.com](http://www.peli.com)

# MODLIGHT PIVOT

ACCESSORIES



## MODLIGHT PIVOT

The ultimate in-case lighting solution. A purpose-built, low-profile, and compact light designed for seamless, tool-free installation into a wide range of Peli cases.

### Built Compact. Built to Last.

Engineered with a low-profile footprint, ModLight Pivot stays out of your way while delivering the illumination you need. The compact design fits seamlessly into your Peli case without sacrificing valuable gear space.

\* Scan this code to see the compatibility guide in the Support section:

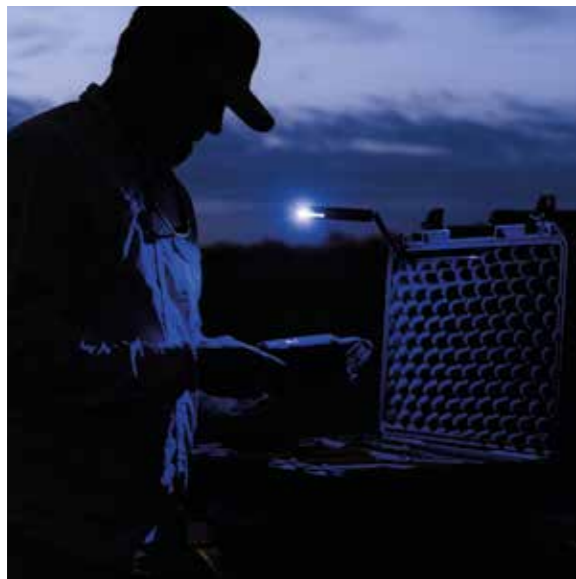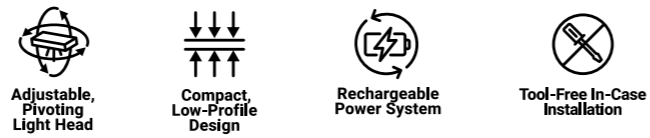

# LIGHT MOUNTING SYSTEMS AND HOLSTERS

ACCESSORIES

## HOLSTER STYLES

CAT. NO. 7607	
CAT. NO.	7600

## LIGHT AND HEADLAMP HOLDER STYLES

	CAT. NO. 0770C, UNIV.	CAT. NO. 0782 ALL IN*	CAT. NO. 2748Z0	CAT. NO. 1975HZ0
CAT. NO.	1975Z0	2390	2410	2460
	2745Z0	2755Z0	3310	3315

\* This item is available upon minimum order quantities. Check with your Customer Service representative for further details.

# CUSTOM LABELS

# MORE THAN A FLASHLIGHT



**LIMITED LIFETIME\* GUARANTEE**

\* Lifetime guarantee not applicable where prohibited by law.

Peli offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Peli lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colours.

We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and moulding programs.



**SELF PROGRAMMABLE**  
(On selected models only)



**PIVOTING 60° HEAD**  
(On selected models only)



**GESTURE ACTIVATION**  
(On selected models only)



**GRAPHIC DESIGN STUDIO**  
Our in-house graphics studio will take your logo and size it appropriately to the torch of your choice.



**HOT STAMPING**  
Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply.



**LASER ETCHING**  
Available only on metal bodied lights.



**USB RECHARGEABLE**  
(On selected models only)



**DOWNCAST LIGHTING FEATURES**  
(On selected models only)



**PHOTOLUMINESCENT DESIGNS**  
(On selected models only)



Peli Remote Area Lighting systems (RALS) bring fully portable, powerful, energy-efficient and rechargeable lighting to remote areas, confined spaces and large workspaces without the use of a generator.

This all-encompassing product line includes compact single headed models that easily fit into confined spaces, two and four headed models that are capable of turning night into day and an ATEX safety approved model for use in hazardous work environments.

# RALS REMOTE AREA LIGHTING SYSTEMS

# PELI RALS FEATURES

## ■ BUILT TO LAST

Made of polycarbonate / ABS and/or polypropylene (depending on the model), these extremely tough portable flood lights, have been tested and proven in the harshest and most demanding work environments by first responders, military and defense, aerospace, and industrial customers.

## ■ ENERGY EFFICIENT

Each RALS is designed with LED technology to provide a better quality of light, high reliability and low energy consumption. The result is an energy efficient lighting solution with low long-term operating and maintenance costs.

## ■ 12V POWER SUPPLY WITH DUAL USB ADAPTER (ONLY ON 9460/M, 9470/M)

12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps) or a variety of USB connections.

## ■ RECHARGEABLE BATTERY

All units employ a silent, rechargeable sealed battery, freeing users to work virtually anywhere, on or off the grid, without a generator.

## ■ MULTI-TERRAIN TROLLEY (ONLY ON 9460M, 9470M)

Large 38 cm polyurethane wheels allow for easier transport across rough surfaces. Moulded feet level and stabilise case.

## ■ SWAPPABLE POWER PACK (ONLY ON 9480, 9490)

Swappable power pack w/12v aux. port adapter powers smartphones, laptops, etc.

## ■ BATTERY LEVEL INDICATOR


Full time battery level indication.



# RAALS

Depending on the model, Peli RALS feature multiple heads, multi-position deployable masts with 360° rotating heads, and swappable battery (selected models). Using the state-of-art of LEDs, some of Peli's RALS models feature up to 24.000 lumens of powerful beam of light and offer up to 28 hours of run time.

SEE ALL



## 9430

**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
40 x 20 x 23 cm  
(15.75" x 7.87" x 9.06")

**LIGHT HEAD HEIGHT (MAX.)**  
82 cm (32.28")

**BEAM SPREAD**  
125°

- Large Area Coverage
- Low Battery Warning System

UP TO	LUMENS	RUN TIME
	3000	15h



## 9730

**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
34,29 x 21,59 x 20,95 cm  
(13.5" x 8.5" x 8.25")

**LIGHT HEAD HEIGHT (MAX.)**  
101,6 cm (40")

- Rear-facing puddle light
- Rear puddle light improves safety
- Variable light modes:  
High / Medium / Low + Rear

UP TO	LUMENS	RUN TIME
	4500	18h



NEW

## 9750

**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
34.3 x 21.6 x 21 cm  
(13.5" x 8.5" x 8.25")

- Rear puddle light for additional safety illumination
- Variable light modes: Spot, Flood, Spot/Flood, Rear & Boost, High, Med, Low

UP TO	LUMENS	RUN TIME
	5000	18h



NEW

## 9455Z0



**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
39 x 20 x 23 cm  
(15.35" x 7.87" x 9.06")

**LIGHT HEAD HEIGHT (MAX.)**  
80 cm (31.50")

**BEAM SPREAD**  
125°

- CERTIFICATIONS//**  
II 1G Ex ia op is IIC T4 Ga
- Full Time Battery Level Indication with low battery warning
  - High/Low/Flashing modes

UP TO	LUMENS	RUN TIME
	1600	10h



## 9455Z0

### WORLD'S SAFEST WORKLIGHT



#### THE DANGER ZONE NEVER LOOKED SO BRIGHT

Now you can take remote area lighting to hazardous areas around the globe. The Peli™ 9455Z0 RALS is our first area light that's ATEX Zone 0 (Cat. 1) approved allowing you to work where flammable gases, vapors or liquids are present.

Weighing in at 7,3 kg and completely collapsible, the Peli™ 9455Z0 RALS is easy to carry and set up for the next task.



#### UNCOMPROMISING OUTPUT


Most safety certified lights use lower lumens to minimise heat generated by the lamp module. The result is a dimmer light and unsafe work areas. The Peli™ 9455Z0 RALS delivers on all cylinders without compromise.

Our engineers developed the Peli™ 9455Z0 RALS to output up to 1600 lumens of clean, bright light that meets hazardous area requirements at the same time.



#### CHARGED FOR YOUR ENTIRE WORK SHIFT

Powered by a NiMH battery, the Peli™ 9455Z0 RALS extracts 10 hours on a single charge, while also maintaining peak brightness on the job. You'll never be caught in the dark- the flashing low battery warning gives you 30 minutes of reserve light.



#### SEE EVERY NOOK AND CRANNY

The Peli™ 9455Z0 RALS projects a 125° beam spread that can help prevent workplace injuries. Conventional torches produce a narrow beam lighting up only small concentrated areas. The 125° beam spread from the Peli™ 9455Z0 RALS lights up the entire work area so you see the work at hand and the peripheral hazards around you, leading to better situational awareness.

9480



**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
39.4 x 16.5 x 26 cm  
(15.5" x 6.5" x 10.25")

**LIGHT HEAD HEIGHT (MAX.)**  
60.3 cm (23.75")

**BEAM SPREAD**  
125°

- 3 pre-set light output levels
- Full time battery level indication with low level flashing indicator
- Quick release / Hot swappable battery design with 12 volt power supply



UP TO	LUMENS	RUN TIME
	4000	28h

9490



**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
50.8 x 16.5 x 28.6 cm  
(20.00" x 6.50" x 11.25")

**LIGHT HEAD HEIGHT (MAX.)**  
182.9 cm (72.0")

**BEAM SPREAD**  
125°

- Deployable 1,83 m Mast
- Intelligent Control (allows various light output levels)
- Full time battery level indication with low level flashing indicator
- Quick release / Hot swappable battery design with 12 volt power supply



UP TO	LUMENS	RUN TIME
	6000	24h



9440



**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
95 x 20 x 20 cm  
(37.40" x 7.87" x 7.87")

**LIGHT HEAD HEIGHT (MAX.)**  
215.9 cm (85.0")

**BEAM SPREAD**  
125°

- Deployable 2,1 m Mast
- Battery level indicator

UP TO	LUMENS	RUN TIME
	5300	8h



9460



**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
59.1 x 35.6 x 23.5 cm  
(23.25" x 14.00" x 9.25")

**LIGHT HEAD HEIGHT (MAX.)**  
201.9 cm (79.50")

**BEAM SPREAD**  
120°

- 12volt Power Supply with Dual USB Adapter
- Full time battery level indication with low level flashing indicator
- Housed in a Pelican™ Protector Case™

UP TO	LUMENS	RUN TIME
	12000	24h





### 9460M



**LIGHT SOURCE**  
High Flux LEDs


**DIMENSIONS**  
59.1 x 35.6 x 23.5 cm  
(23.25" x 14.00" x 9.25")

**LIGHT HEAD HEIGHT (MAX.)**  
201.9 cm (79.50")

**BEAM SPREAD**  
120°

- Multi-Terrain Trolley
- 12volt Power Supply with Dual USB Adapter
- Housed in a Pelican™ Protector Case™

UP TO	LUMENS	RUN TIME
	12000	24h



### 9470



**LIGHT SOURCE**  
High Flux LEDs

**DIMENSIONS**  
62.9 x 50.8 x 29.8 cm  
(24.75" x 20.00" x 11.75")

**LIGHT HEAD HEIGHT (MAX.)**  
208.3 cm (82.00")

**BEAM SPREAD**  
120°

- 12volt Power Supply with Dual USB Adapter
- Full time battery level indication with low level flashing indicator
- Housed in a Pelican™ Protector Case™

UP TO	LUMENS	RUN TIME
	24000	24h



### 9470M



**LIGHT SOURCE**  
High Flux LEDs


**DIMENSIONS**  
62.9 x 50.8 x 29.8 cm  
(24.75" x 20.00" x 11.75")

**LIGHT HEAD HEIGHT (MAX.)**  
208.3 cm (82.00")

**BEAM SPREAD**  
120°

- Multi-Terrain Trolley
- 12volt Power Supply with Dual USB Adapter
- Housed in a Pelican™ Protector Case™

UP TO	LUMENS	RUN TIME
	24000	24h



WHEELS



ALL-TERRAIN WHEELS



RECHARGEABLE

# SPECIFICATIONS

CAT NO.	9430	9730	9750	9455Z0	9480	9490	9440	9460/M	9470/M
<b>LIGHT SOURCE</b>	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs
<b>LAMP HEADS</b>	1	1	1	1	1	1	1	2	4
<b>NO. OF LEDS</b>	6			10	8	10	12	20	40
<b>BEAM SPREAD</b>	125°			125°	125°	125°	125°	120°	120°
<b>BATTERIES</b>	12v Rechargeable, Sealed	SLA 12Ah	11 kg (24.33 lbs)	NiMH	12v Rechargeable, Sealed Lead Acid SLA	12v Rechargeable, Sealed Lead Acid SLA	Rechargeable Lithium ion	12v Rechargeable, Sealed	12v Rechargeable, Sealed
<b>CALCULATED LUMEN VALUE</b>	3000*, 1500***	4800*, 2000**, 1000***	4900*, 2000**, 1100***	1600*, 800***	4000*, 3000**, 1000***	6000*	5300*, 2800**, 1400***	12000*	24000*
<b>BATTERY RUN TIME</b>	8h*, 15h***	3.5h*, 7h**, 13h***	5.75h*, 11h**, 24h***	5h*, 10h***	6h*, 8h**, 28h***	3.5h*, 12h**, 24h***	1h 50m*, 4h**, 8h***	3h*, 24h***	2.75h*, 24h***
<b>DIMENSIONS (CLOSED)</b>	40 x 20 x 23 cm (15.75" x 7.87" x 9.06")	34.29 x 21.59 x 20.95 cm (13.5" x 8.5" x 8.25")	34.3 x 21.6 x 21 cm (13.50" x 8.50" x 8.25")	39 x 20 x 23 cm (15.35" x 7.87" x 9.06")	39.4 x 16.5 x 26 cm (15.5" x 6.5" x 10.25")	50.8 x 16.5 x 28.6 cm (20.0" x 6.5" x 11.25")	95 x 20 x 20 cm (37.4" x 7.87" x 7.87")	59.1 x 35.6 x 23.5 cm (23.25" x 14.00" x 9.25")	62.9 x 50.8 x 29.8 cm (24.75" x 20.00" x 11.75")
<b>HEAD</b>	16.5 x 20 x 6.5 cm (6.5" x 7.87" x 2.56")			21 x 14.5 x 5 cm (8.26" x 5.71" x 1.97")	21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")	21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")	20 x 20 x 8.9 cm (7.87" x 7.87" x 3.5")	21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")	21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")
<b>LIGHT HEAD HEIGHT (MAX.)</b>	82 cm (32.28")	101,6 cm (40")		80 cm (31.50")	60.3 cm (23.75")	182.9 cm (72.0")	215.9 cm (85.0")	201.9 cm (79.50")	208.3 cm (82.00")
<b>WEIGHT</b>	10.27 kg (22.65 lbs)	8.4 kg (18.55lbs)		7.3 kg (16.00 lbs)	12.5 kg (27.5 lbs)	14.5 kg (32.0 lbs)	7.3 kg (16.09 lbs)	9460: 27.7 kg (61.00 lbs) 9460M: 29kg (64.00 lbs)	9470: 47.6 kg (105.00 lbs) 9470M: 49 kg (108.00 lbs)
<b>COLOURS</b>									
<b>APPROVALS</b>	CE, RoHS Compliant			II TG Ex ia op is IIC T4 Ga	CE, RoHS Compliant	CE, RoHS Compliant	CE, RoHS Compliant	CE, RoHS Compliant	CE, RoHS Compliant
<b>IP RATING</b>	54	X4	X4	54	54	54	65	54	54

\*High | \*\*Medium | \*\*\*Low | ^ Figures calculated from LED manufacturer data | <sup>1</sup> Yellow colour available upon minimum order quantities  
Additional approvals may apply. For details go to [www.peli.com](http://www.peli.com)

# ACCESSORIES

CAT. NO.	9430	9730	 9455Z0	9480	9490	9440	9460/M	9470/M
9430TP TRIPOD	•							
9433B SOCKET ADAPTOR	•							
9436B 12/24V VEHICLE CHARGER	•							
9437B EXTENSION CORD (BLACK CONNECTOR) 118 INCHES (3M)	•							
9438B UNIVERSAL CHARGER	•							
1460AALG 1460 CASE WITH CUSTOM FIT FOAM	•		•					
9447 12/24V VEHICLE CHARGER				•	•	•		
9487 PADDED SHOULDER STRAP				•	•			
9489 POWERPACK				•	•			
9446 12/24V DC VEHICLE CHARGER						•		
9443 SHOULDER STRAP		•				•		
9466 12/24V VEHICLE ADAPTOR							•	•
9466B 12/24V VEHICLE CHARGER							•	
9467 GEN II EXTENSION CORD (GREEN CONNECTOR) 118 INCHES (3M)							•	•
9476B VEHICLE CHARGER 12-24V ASSY, 9470B/RS								•
9607 STEEL LIGHT BASE								
9606 POWER CABLE								
9605 ALUMINIUM POLE								

374  
14.72

A

D



C

A

**PELI PRODUCTS, S.L.U.**  
C/ Provença, 388 Planta 6  
08025 Barcelona • Spain  
Tel +34 934 674 999

**PELI PRODUCTS FRANCE S.A.S.**  
20/22 Rue des Petits Hôtels  
75010 Paris • France  
Tel +33 (0)1 44 83 95 63

**PELI PRODUCTS GERMANY GmbH**  
Neudorfer Strasse 285 C  
09474 Crottendorf • Germany  
Tel +49 (0)37344 313999

381.5  
15.00

©2026 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Peli Products, S.L.U., its parent, subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit [www.peli.com](http://www.peli.com) and [www.pelicatalogue.com](http://www.pelicatalogue.com).  
Part No. 0030-LIG-001E APR 26