


Lights Catalog



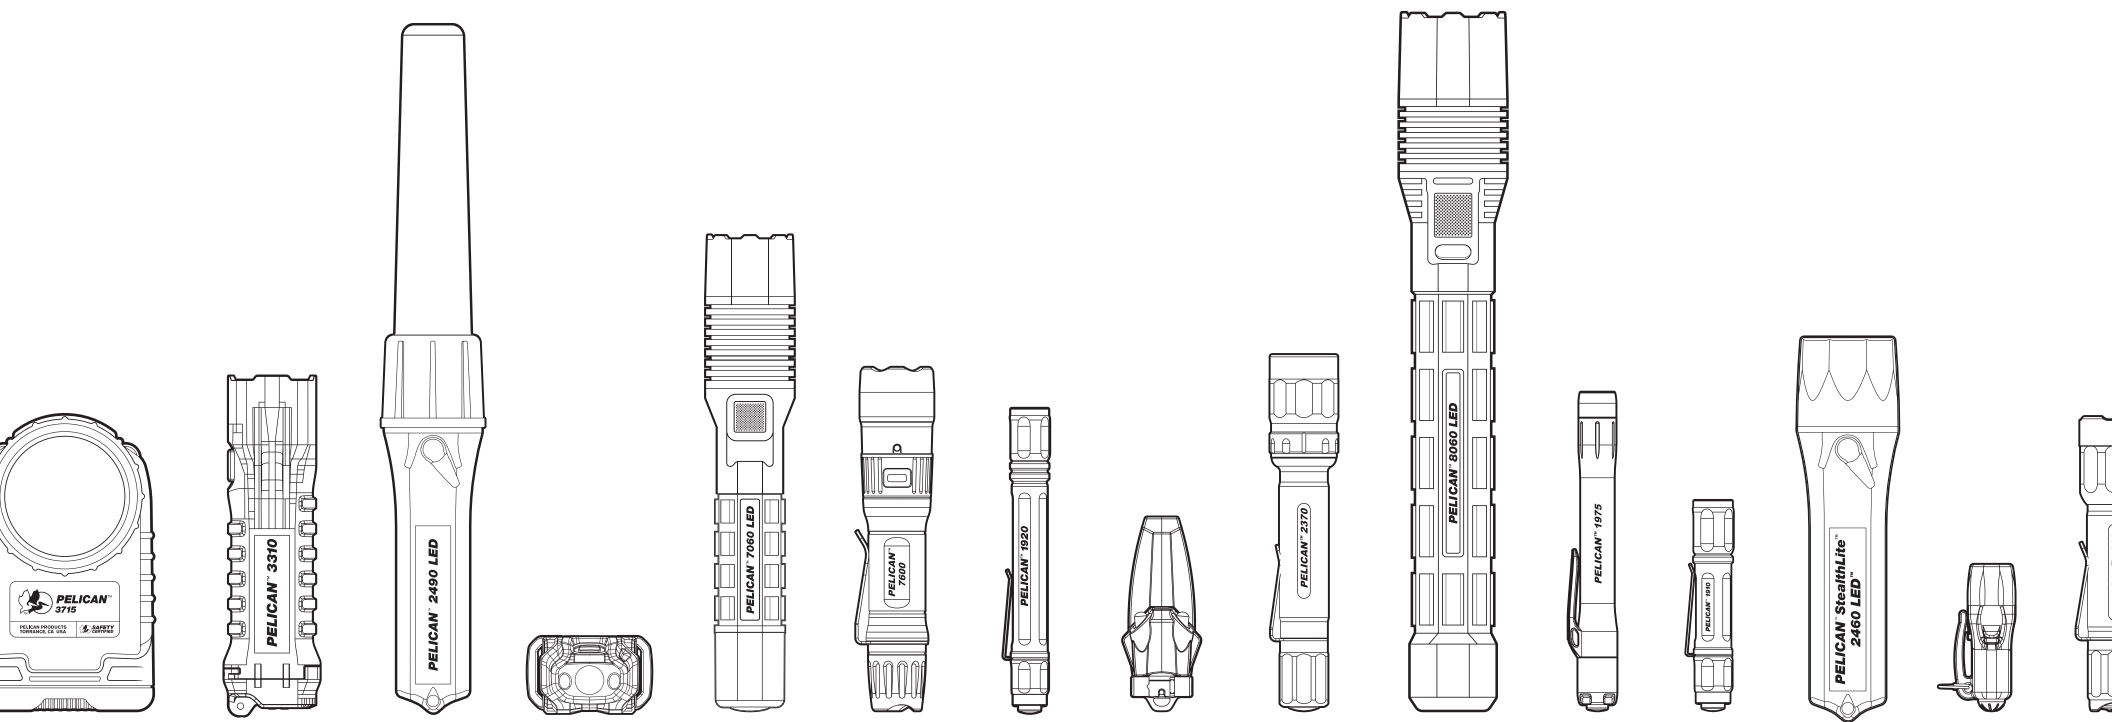

1976 - Original SabreLite™ Flashlight

At Pelican, we know protection from the outside in and from the inside out. As the inventors of the legendary Pelican Case, and the owners of the proven Hardigg Industry Cases, we continue to be the leader in built to protect solutions to equip for the mission. To some, we provide an essential way to protect your gear. To others, we provide a badge of honor. But to everyone, the iconic Pelican Case is a symbol of empowerment to enable the mission. Balancing our earned iconic status with our continued quest for innovation has always been the key to accomplishing the millions of missions — past, present, and future.

Sincerely,

James "JC" Curleigh // CEP, Pelican Products, Inc.

Markets Served

**Fire
EMS
Law Enforcement
Industrial
Military
Aerospace**



Table of Contents

Performance	1
Glossary of Terms	1
Safety Certification Guidelines	2
Safety Certified	
Lights	3
Right Angle and Articulating Lights	7
Headlamps	9
High Performance	
Professional Work Lights	11
5 Series Lights	13
Tactical Lights	15
Headlamps	17
Photoluminescent Lights	19
Correct Color™ Lights	21
Remote Area Lighting Systems	23
Specialty Lights	27
Holster and Wand Accessories	29
Specifications	31
Custom Branding	35

Performance

ANSI Standards (American National Standards Institute)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the flashlight industry, developed performance standards and symbols to effectively communicate a flashlight's features and benefits.

The resulting ANSI/NEMA FL 1 Standards include the following six criteria:

Standards and Ratings

(Applicable To Flashlights Only)



Light Output

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



Peak Beam Intensity

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



Water Resistant

Water Resistant // IPX4 - Water splashed against the device from any direction shall have no harmful effects.



Run Time

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



Beam Distance

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



Waterproof/Submersible

Waterproof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.
Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

Glossary of Terms



Rechargeable

Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.

Candela

A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

Lux

The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

Lumen

A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

Integrating Sphere

An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffused with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (Ingress Protection)

These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) whereas the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

Safety Certification Guidelines

Your Passport Through Hazardous Locations


Whether working in a Class I Oil Refinery or in the silo of a Class III Textile Mill, safety is always a concern and your lighting tool shouldn't add to your worries. Pelican builds lighting tools certified for hazardous work environments. In fact we make more safety approved lights certified for Class I II III Div. 1 and groups ABCDEFG than anyone else.



Hazardous Area Electrical Guidelines

Classification		Substance	Typical Environments
Class I	Division 1	Flammable Gases, Vapors, or Liquids	Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
	Division 2		
Class II	Division 1	Combustible Dusts	Coal Mine, Munitions Factory, Grain Silo, Hay Storage Facility
	Division 2		
Class III	Division 1	Ignitable Fibers & Flyings	Paper Mill, Woodworking Facility, Textile Mill, Cotton Gin
	Division 2		
Division 1 (Hazard Likely): Where volatile substances can exist all of the time or some of the time under normal operating conditions.			
Division 2 (Hazard Not Likely): Where volatile substances are not likely to exist under normal operating conditions.			



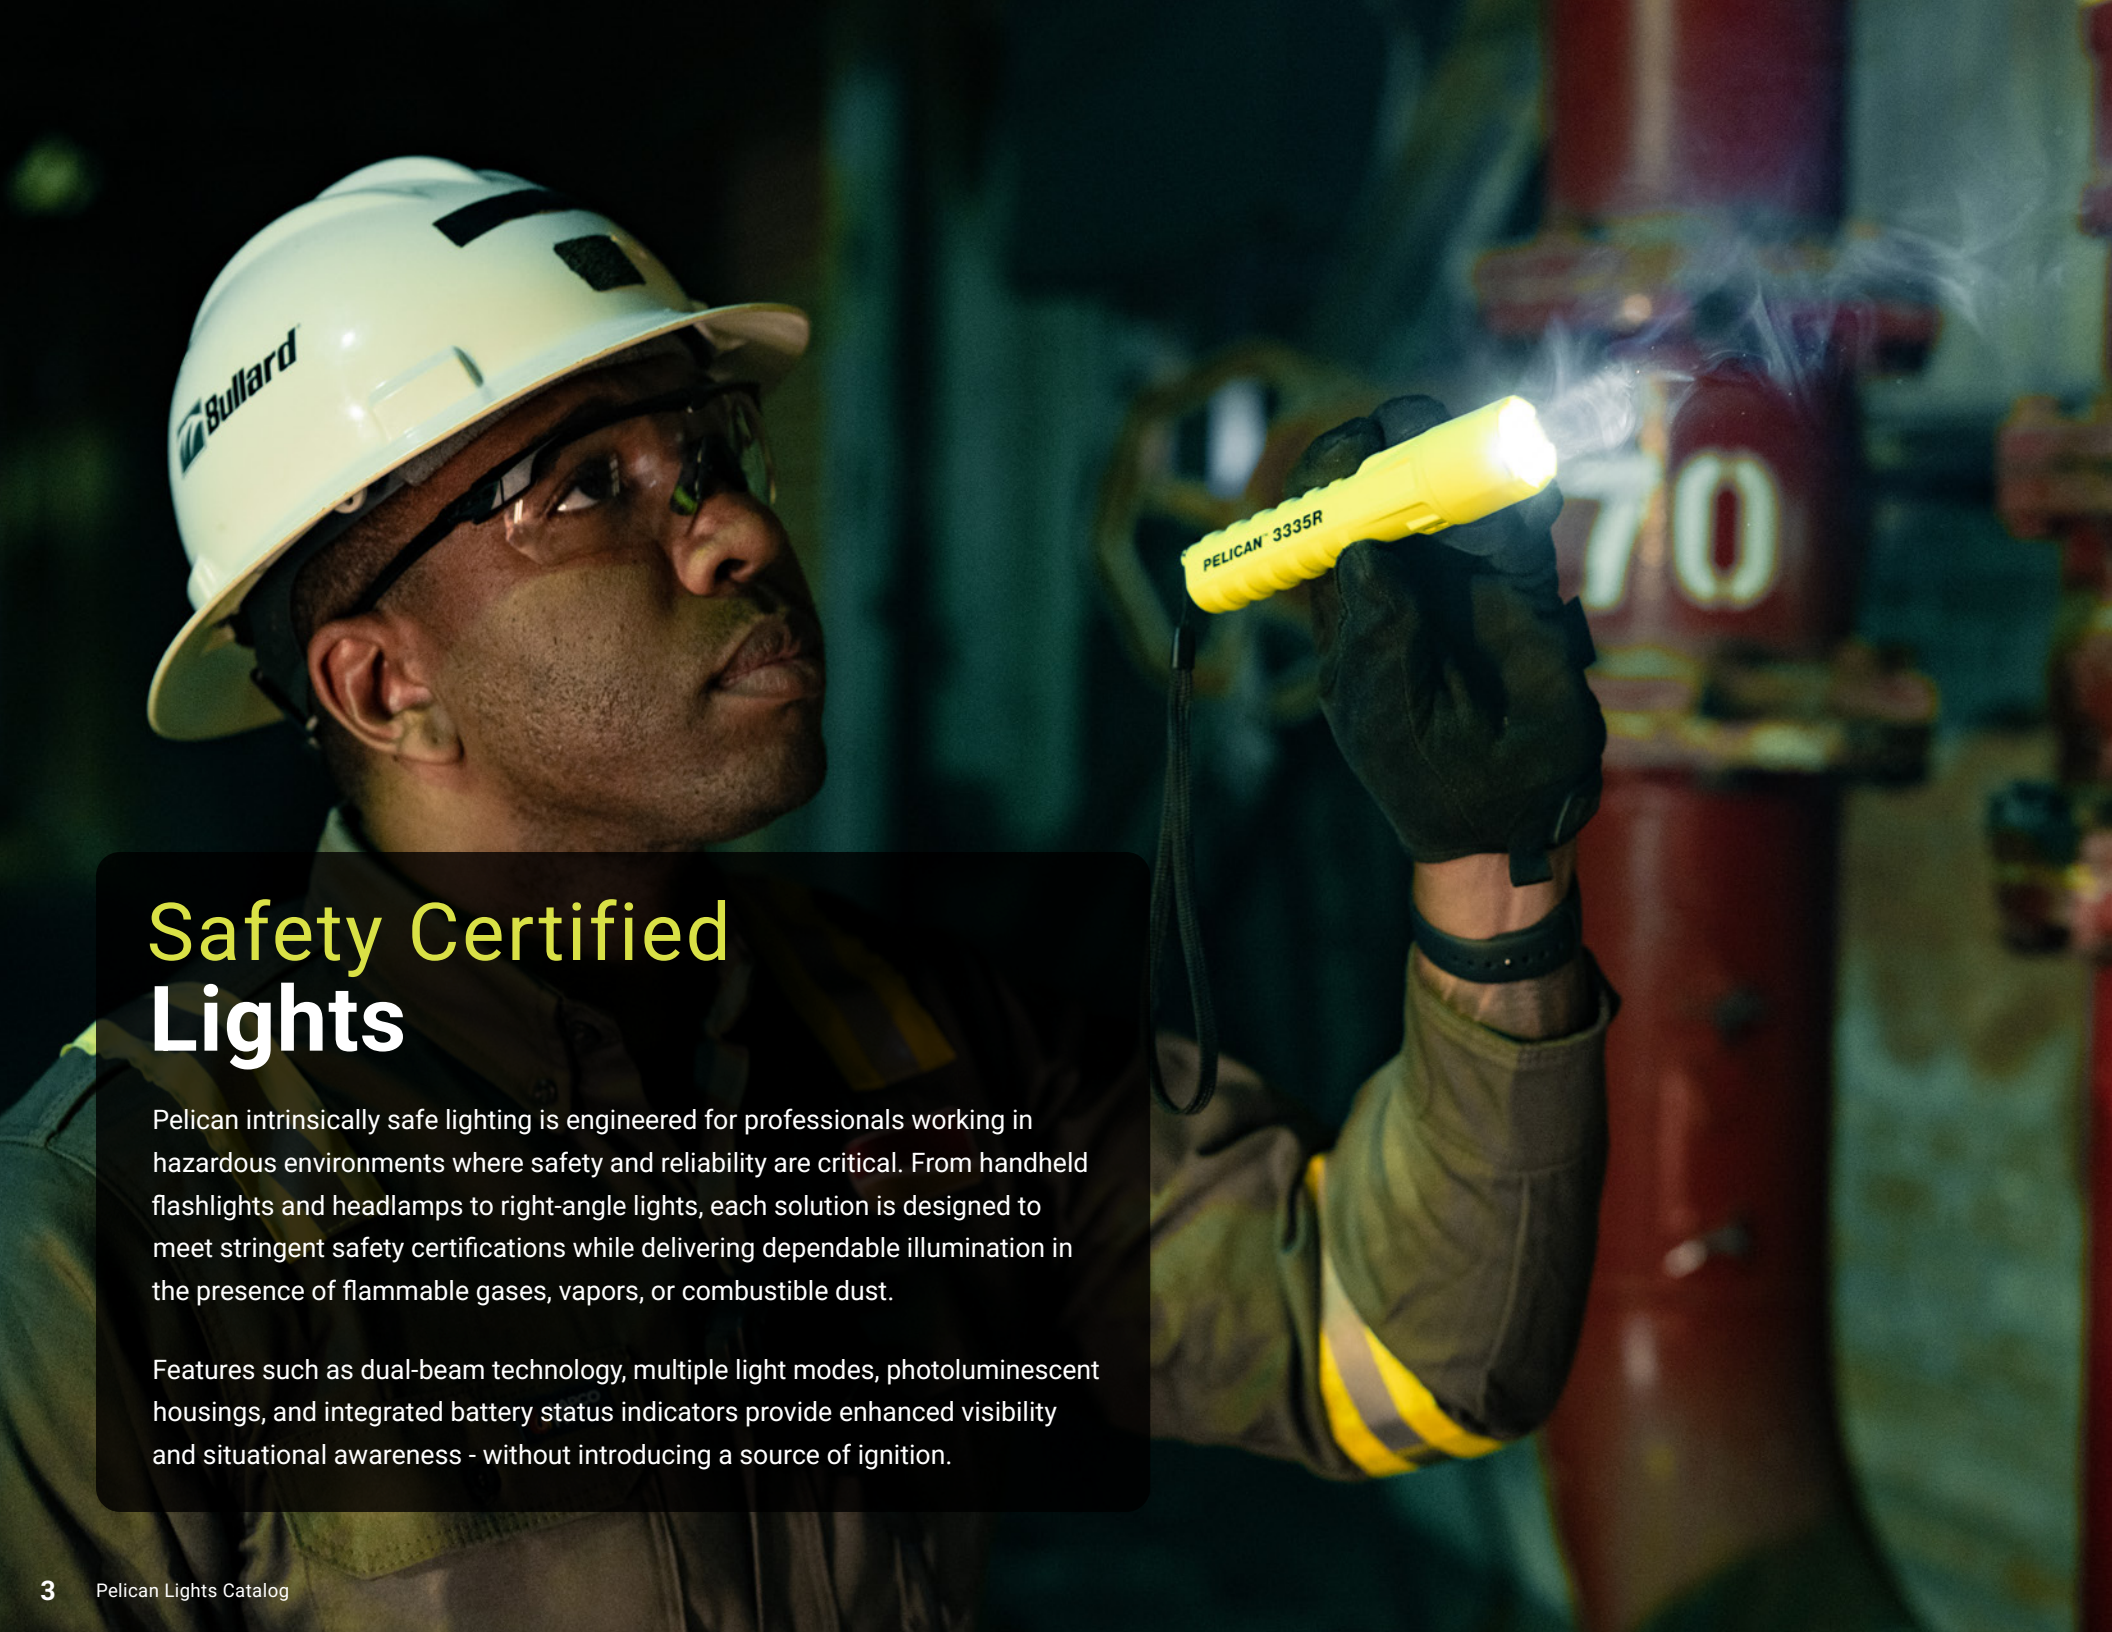

Safety Certified Lights

Pelican intrinsically safe lighting is engineered for professionals working in hazardous environments where safety and reliability are critical. From handheld flashlights and headlamps to right-angle lights, each solution is designed to meet stringent safety certifications while delivering dependable illumination in the presence of flammable gases, vapors, or combustible dust.

Features such as dual-beam technology, multiple light modes, photoluminescent housings, and integrated battery status indicators provide enhanced visibility and situational awareness - without introducing a source of ignition.

L1™ 1930

Light Source

LED

Batteries

4 LR 44 Alkaline (included)

Length

2.64" (6.7cm)

Certifications

CI, D1/CI II, D2, IECEx ia



12	4h 15m
Lumens	Run Time

1975

Light Source

LED

Batteries

2 AAA Alkaline (included)

Length

5.75" (14.6cm)

Certifications

CI II III, D1



117	2h 15m
Lumens	Run Time

1975i

Light Source

LED

Batteries

2 AAA Alkaline (included)

Length

5.75" (14.6cm)

Certifications

IECEx ia



117	2h 15m
Lumens	Run Time

Sabrelite™ 2010

Light Source

LED

Batteries

3 C Alkaline (not included)

Length

8.11" (20.6cm)

Certifications

CI II III, D1



161	22h
Lumens	Run Time

Sabrelite™ 2010PL (Photoluminescent Shroud)

Light Source

LED

Batteries

3 C Alkaline (not included)

Length

8.11" (20.6cm)

Certifications

CI II III, D1



161	22h
Lumens	Run Time

VB3™ 2220

Light Source

LED

Batteries

2 CR2032 Lithium (included)

Length

3.5" (8.9cm)

Certifications

CI, D1



9	34h
Lumens	Run Time

2315

Light Source

LED

Batteries

2 AA Alkaline (included)

Length

6.22" (15.8cm)

Modes

High / Low

Certifications

CI II III, D1, IECEx ia



115	6h
Lumens	Run Time

Stealthlite™ 2410

Light Source

LED

Batteries

4 AA Alkaline (included)

Length

7" (17.8cm)

Certifications

CI II III, D1, IECEx ia



183	5h 45m
Lumens	Run Time

Stealthlite™ 2410PL (Photoluminescent Shroud)

Light Source

LED

Batteries

4 AA Alkaline (included)

Length

7" (17.8cm)

Certifications

CI, II, III D1, IECEx ia



183	5h 45m
Lumens	Run Time

Stealthlite™ 2460

Light Source

LED

Batteries

NiMH (included)

Length

7" (17.8cm)

Certifications

CI II, D2

**183**

Lumens

5h

Run Time

3325

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.06" (15.4cm)

Certifications

CI II III, D1, IECEx ia

**171**

Lumens

16h

Run Time

9415 Lantern

Light Source

LED

Batteries

NiMH (included)

Length

8.75" (22.2cm)

Modes

High / Low / Flashing

Full Time Battery Indicator

Certifications

CI, D1



UP TO

588
Lumens**11h 30m**
Run Time

3315

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.14" (11.8cm)

Certifications

CI II III, D1

**160**

Lumens

19h

Run Time

3335R

Light Source

LED

Batteries

1 Lithium-Ion (included)

Length

6.11" (15.5cm)

Modes

High / Low / Flashing

Certifications

CI, D1, IECEx ia, InMetro



UP TO

246
Lumens**58h**
Run Time

3315PL (Photoluminescent)

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.14" (11.8cm)

Certifications

CI II III, D1

(Photoluminescent)

**160**

Lumens

19h

Run Time

3345

Light Source

LED

Batteries

3 AA Alkaline (not included)

Length

7.25" (18.4cm)

Certifications

CI II III, D1, IECEx ia



UP TO

280
Lumens**14h**
Run Time

9415i Lantern

Light Source

LED

Batteries

NiMH (included)

Length

8.75" (22.2cm)

Modes

High / Low / Flashing

Full Time Battery Indicator

Certifications

IECEx ia, ATEX Zone 0



UP TO

392
Lumens**11h**
Run Time



**Safety Certified
Right Angle and
Articulating Lights**



All lights on this page
are Safety Certified.

Safety Certified | Right Angle and Articulating Lights

3415 / 3415M

Light Source

LED

Batteries

3 AA (not included)

Length

7.44" (18.9cm)

Modes

High

Spot / Flood / Both

Certifications

CI II III, D1, IECEx ia



3415M Includes
Magnetic Clip

336	15h
Lumens	Run Time

Little ED™ 3610

Light Source

LED

Batteries

4 AA Alkaline (included)

Length

7.51" (19.1cm)

Certifications

CI II III, D1



183	5h 45m
Lumens	Run Time

Little ED™ 3610PL (Photoluminescent Shroud)

Light Source

LED

Batteries

4 AA Alkaline (included)

Length

7.51" (19.1cm)

Certifications

CI II III, D1



183	5h 45m
Lumens	Run Time

3715

Light Source

LED

Batteries

4 AA Alkaline (not included)

Length

5.36" (13.6cm)

Modes

High / Low / Flashing / Downcast

Certifications

CI, D1



UP TO	233	31h
	Lumens	Run Time

3715PL (Photoluminescent Shroud)

Light Source

LED

Batteries

4 AA Alkaline (not included)

Length

5.36" (13.6cm)

Modes

High / Low / Flashing / Downcast

Certifications

CI, D1



UP TO	233	31h
	Lumens	Run Time

3765

Light Source

LED

Batteries

NiMH (included)

Length

5.36" (13.6cm)

Modes

High / Low / Flashing / Downcast

Certifications

CI, D1



UP TO	237	14h
	Lumens	Run Time

3765PL (Photoluminescent Shroud)

Light Source

LED

Batteries

NiMH (included)

Length

5.36" (13.6cm)

Modes

High / Low / Flashing / Downcast

Certifications

CI, D1



UP TO	237	14h
	Lumens	Run Time



Safety Certified Headlamps



2610 Headsup Lite™ Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

1.49" (3.8cm)

Modes

High / Low

Certifications

CI, D1, IECEx ia



UP TO **30**
Lumens

47h
Run Time

2690 Headsup Lite™ Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.81" (7.1 cm)

Certifications

CI II III, D1, IECEx ia



UP TO **74**
Lumens

11h
Run Time

2745 Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.25" (5.7 cm)

Modes

High / Low / Flashing

Certifications

CI, D1, IECEx ia



UP TO **33**
Lumens

40h
Run Time

2755 Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.25" (5.7 cm)

Modes

High / Low / Flashing /
Low Battery Warning

Certifications

CI, D1, IECEx ia



UP TO **118**
Lumens

16h
Run Time

2765 Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.25" (5.7 cm)

Modes

High / Low / Flashing /
Downcast

Certifications

CI, D1, IECEx ia



UP TO **155**
Lumens

14h
Run Time

2785 Headlamp

Light Source

LED

Batteries

4 AA Alkaline (included)

Length

3.00" (7.6 cm)

Modes

High / Medium / Low /
Flashing / Downcast

Certifications

CI D1



UP TO **215**
Lumens

98h
Run Time



High Performance Professional Work Lights

Engineered for technicians, trades, and daily-duty professionals, Pelican performance lighting delivers dependable LED output and rugged durability where work gets done. From compact handheld lights to powerful mountable solutions, there's a Pelican light built to provide reliable illumination shift after shift.

1810

Light Source

LED

Batteries

4 LR 41 Alkaline (included)

Length

1.50" (3.8 cm)



16
Lumens

8h 30m
Run Time

1910

Light Source

LED

Batteries

1 AAA Alkaline (included)

Length

3.8" (9.7cm)

Modes

High / Low



UP TO 106
Lumens

4h
Run Time

1920

Light Source

LED

Batteries

2 AAA Alkaline (included)

Length

5.5" (14.0cm)

Modes

High / Low



UP TO 224
Lumens

8h 45m
Run Time

1970

Light Source

LED

Batteries

2 AAA Alkaline (included)

Length

5.75" (14.6cm)

Modes

High



139
Lumens

4h 15m
Run Time

2310

Light Source

LED

Batteries

2 AA Alkaline (included)

Length

6.22" (15.8cm)

Modes

High / Low



UP TO 350
Lumens

27h
Run Time

3310PL (Photoluminescent)

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.14" (15.6cm)

Modes

High / Low / Flashing
(flashlight body glows in the dark)



UP TO 378
Lumens

202h
Run Time

3310ELS (Emergency Lighting System)

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.14" (15.6cm)

Includes

3310PL and Wall Mountable Case
(flashlight body glows in the dark)

(Photoluminescent)



UP TO 378
Lumens

202h
Run Time

3410 / 3410M

Light Source

LED

Batteries

3 AA (not included)

Length

7.44" (18.9cm)

Modes

High / Medium / Low
Spot / Flood / Both

(Photoluminescent)



3410M Includes
Magnetic Clip

UP TO 635
Lumens

61h
Run Time

9050 with Charger Base

Light Source

LED

Batteries

2 Lithium-Ion (included)

Length

8.03" (20.4 cm)

Modes

Spot / Flood / Spot & Flood



UP TO 3369
Lumens

13h 30m
Run Time



High Performance 5 Series Lights

Our 5 Series flashlights feature slide beam technology. The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.

5000

Light Source
LED
Batteries
2 AAA Alkaline (included)
Length
5.59" (14.2 cm)
Modes
High / Low / Flashing



UP TO **202** Lumens | **7h** Run Time

5010

Light Source
LED
Batteries
2 AA Alkaline (included)
Length
6.26" (15.9 cm)
Modes
High / Low / Flashing



UP TO **392** Lumens | **26h** Run Time

5020

Light Source
LED
Batteries
4 AAA Alkaline (included)
Length
5.87" (14.9 cm)
Modes
High / Medium / Low / Flashing



UP TO **586** Lumens | **27h** Run Time

5050R

Light Source
LED
Batteries
Lithium-Ion (included)
Length
6.16" (15.6 cm)
Modes
Boost / High / Low / Flashing



UP TO **883** Lumens | **40h** Run Time




Includes USB power output to charge devices.

Slide Beam Technology



Flood Beam
Up to 78° beam spread

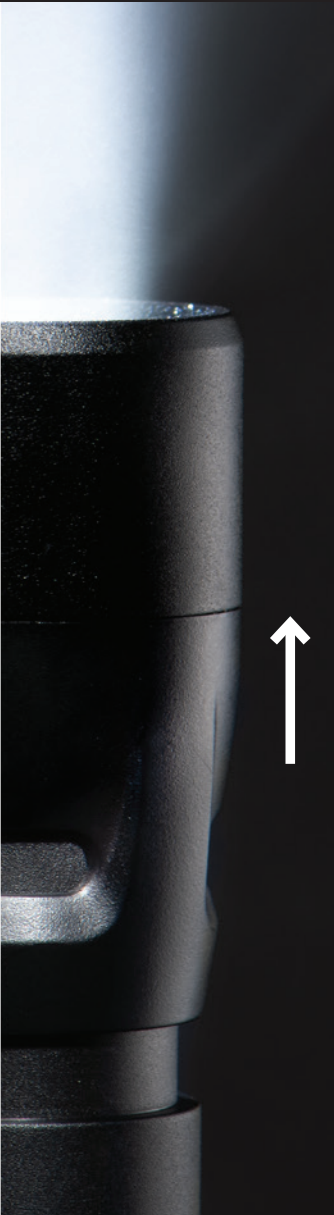

Spot Beam
Up to 250 yards of long distance visibility

High Performance Tactical Lights

Durable housings, high-output beams, and intuitive controls deliver confident performance in critical situations.

2350

Light Source

LED

Batteries

1 AA Alkaline (included)

Length

4.23" (10.7 cm)

Modes

High / Strobe / Low



UP TO

178
Lumens

21h
Run Time

2360

Light Source

LED

Batteries

2 AA Alkaline (included)

Length

6.2" (15.7cm)

Modes

High / Strobe / Low



UP TO

375
Lumens

13h
Run Time

2370

Light Source

LED

Batteries

2 AA Alkaline (included)

Length

6.43" (16.3cm)

Modes

High / Low / Red / Blue

Light Colors

White / Red / Blue



358
Lumens

11h
Run Time

7000

Light Source

LED

Batteries

2 CR123 Lithium-Ion

Length

5.31" (13.5 cm)

Modes

High / Strobe / Medium / Low
Self Programmable



UP TO **774** **13h**
Lumens Run Time

7060

Light Source

LED

Batteries

Lithium-Ion (included)

Length

8.65" (22cm)

Modes

High / Strobe / Medium / Low
Self Programmable



UP TO **235** **68h**
Lumens Run Time

7100

Light Source

LED

Batteries

Lithium-Ion (included)

Length

5.12" (13cm)

Modes

High / Strobe / Medium / Low

Programmable

5 Selectable Programs



UP TO **695** **9h 15m**
Lumens Run Time

7110

Light Source

LED

Batteries

1 AA (included) or 1 CR123

Length

4.63" (11.8cm)

Modes

High / Strobe / Medium / Low

Programmable

5 Selectable Programs



UP TO **445** **13h**
Lumens Run Time

7600 USB-C

Light Source

LED

Batteries

Lithium-Ion (included)

Length

6.19" (15.7cm)

Modes

High / Strobe / Medium / Low

LED Colors

White / Red / Green

Programmable

5 Selectable Programs



UP TO **1080** **37h**
Lumens Run Time

7610

Light Source

LED

Batteries

1 AA (included) or 2 CR123

Length

5.44" (13.8cm)

Modes

High / Strobe / Medium / Low

Programmable

5 Selectable Programs



UP TO **1080** **33h**
Lumens Run Time

7620

Light Source

LED

Batteries

2 AA (included), 2 CR123 or 3 CR123

Length

6.75" (17.15cm)

Modes

High / Strobe / Medium / Low

Programmable

5 Selectable Programs



UP TO **1124** **37h**
Lumens Run Time

8060

Light Source

LED

Batteries

NiMH (included)

Length

12.67" (32.2cm)

Modes

High / Strobe / Medium / Low

Flashing / Self Programmable



UP TO **1072** **60h**
Lumens Run Time

A soldier in camouflage gear is shown at night, wearing a Pelican headlamp. The headlamp is illuminated, casting a bright light. The soldier is holding a long metal rod and is working on a large, dark metal crate. The background is dark and blurry, suggesting an outdoor night setting.

High Performance Headlamps

Pelican headlamps are engineered to provide reliable illumination wherever the job takes you. From close-range task lighting to area illumination, features such as downcast lighting, multiple beam settings, battery-level indication, and night-vision-friendly red light help users stay productive and aware in low-light conditions. Rugged, comfortable, and built for demanding use, they're a trusted lighting solution for work, duty, and outdoor applications.

2720 Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.48" (6.3 cm)

Modes

Variable Light Output /
Spot to Flood / Red Night Vision
Friendly LEDs



UP TO **200** **103h**
Lumens Run Time



Gesture
Activation
Control

2740 Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.25" (5.7 cm)

Modes

High / Low /
Flashing / Red LED



UP TO **66** **21h**
Lumens Run Time

2750 Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.25" (5.7 cm)

Modes

High / Low / Flashing / Red LED /
Low Battery Warning

■ ■ (Photoluminescent)



UP TO **259** **11h**
Lumens Run Time

2760 Headlamp

Light Source

LED

Batteries

3 AAA Alkaline (included)

Length

2.25" (5.7 cm)

Modes

High / Medium / Low /
Downcast / Flashing/
Red LED / Full-time Battery
Level Indicator



UP TO **289** **11h**
Lumens Run Time

2780 Headlamp

Light Source

LED

Batteries

4 AA Alkaline (included)

Length

3.00" (7.6 cm)

Modes

High / Medium /
Low / Flashing / Downcast/
Full-time Battery
Level Indicator

■ □ ■ (Photoluminescent)

3 Interchangeable Covers Included



UP TO **430** **12h**
Lumens Run Time

2780R Headlamp

Light Source

LED

Batteries

Lithium-Ion (included)

Length

3.00" (7.6 cm)

Modes

High / Medium / Low /
Flashing / Downcast /
Full-time Battery
Level Indicator

■ □ ■ (Photoluminescent)

3 Interchangeable Covers Included



UP TO **558** **7h 30m**
Lumens Run Time

Photoluminescent Lights

When the power goes out, these flashlights glow the brightest. Pelican's photoluminescent models are made with "glow-in-the-dark" material to help you find your flashlight in an emergency.

Stealthlite™ 2410PL (Photoluminescent Shroud)

Light Source
LED
Batteries
4 AA Alkaline (included)
Length
7" (17.8cm)
Certifications
CI, II, III D1, IECEx ia



183
Lumens

5h 45m
Run Time



2750 Headlamp

Light Source
LED
Batteries
3 AAA Alkaline (included)
Length
2.25" (5.7 cm)
Modes
High / Low / Flashing / Red LED / Low Battery Warning
■ ■ (Photoluminescent)



UP TO
Lumens

259
Lumens

11h
Run Time

Sabrelite™ 2010PL (Photoluminescent Shroud)

Light Source
LED
Batteries
3 C Alkaline (not included)
Length
8.11" (20.6cm)
Certifications
CI II III, D1



161
Lumens

22h
Run Time



2780 Headlamp

Light Source
LED
Batteries
4 AA Alkaline (included)
Length
3.00" (7.6 cm)
Modes
High / Medium / Low / Flashing / Downcast / Full-time Battery Level Indicator
■ ■ ■ (Photoluminescent)
3 Interchangeable Covers Included



UP TO
Lumens

430
Lumens

12h
Run Time

2780R Headlamp

Light Source

LED

Batteries

Lithium-Ion (included)

Length

3.00" (7.6 cm)

Modes

High / Medium / Low /

Flashing / Downcast /

Full-time Battery

Level Indicator



 (Photoluminescent)

3 Interchangeable Covers Included



UP TO	558	7h 30m
	Lumens	Run Time

3310PL (Photoluminescent)

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.14" (15.6cm)

Modes

High / Low / Flashing

(flashlight body glows in the dark)

 (Photoluminescent)


UP TO	378	202h
	Lumens	Run Time

3310ELS (Emergency Lighting System)

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.14" (15.6cm)

Includes

3310PL and Wall Mountable Case

(flashlight body glows in the dark)

 (Photoluminescent)


UP TO	378	202h
	Lumens	Run Time

3315PL (Photoluminescent)

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.14" (11.8cm)

Certifications

CI II III, D1

 (Photoluminescent)


160	19h
Lumens	Run Time



3325

Light Source

LED

Batteries

3 AA Alkaline (included)

Length

6.06" (15.4cm)

Certifications

CI II III, D1, IECEx ia




171	16h
Lumens	Run Time



3410 / 3410M

Light Source

LED

Batteries

3 AA (not included)

Length

7.44" (18.9cm)

Modes

High / Medium / Low

Spot / Flood / Both

 (Photoluminescent)
3410M Includes
Magnetic Clip

UP TO	635	61h
	Lumens	Run Time

Little ED™ 3610PL (Photoluminescent Shroud)

Light Source

LED

Batteries

4 AA Alkaline (included)

Length

7.51" (19.1cm)

Certifications

CI II III, D1




183	5h 45m
Lumens	Run Time



3715PL (Photoluminescent Shroud)

Light Source

LED

Batteries

4 AA Alkaline (not included)

Length

5.36" (13.6cm)

Modes

High / Low / Flashing / Downcast

CI, D1




UP TO	233	31h
	Lumens	Run Time



3765PL (Photoluminescent Shroud)

Light Source

LED

Batteries

NiMH (included)

Length

5.36" (13.6cm)

Modes

High / Low / Flashing / Downcast

CI, D1




UP TO	237	14h
	Lumens	Run Time





Correct Color™ Lights

When you can't see the difference between one color cable and another, the job may be compromised. Now you can trust our select flashlights with new Correct Color™ technology to work in confidence.



70 CRI
Conventional
Flashlights

90+ CRI
Correct Color
Technology

2750CC Headlamp (Photoluminescent)

Light Source
LED
Batteries
3 AAA Alkaline (included)
Length
2.25" (5.7cm)
Modes
High / Low / Flashing
 (Photoluminescent)



UP TO	138	11h
	Lumens	Run Time

3310CC (Photoluminescent)

Light Source
LED
Batteries
3 AA Alkaline (included)
Length
6.14" (15.6 cm)
Modes
High / Low / Flashing
 (Photoluminescent)



UP TO	238	175h
	Lumens	Run Time

3410MCC (Photoluminescent)

Light Source
LED
Batteries
3 AA Alkaline (not included)
Length
7.44" (18.9 cm)
Modes
High / Medium / Low / Flashing
Spot / Flood / Both
 (Photoluminescent)



3410MCC Includes
Magnetic Clip

UP TO	484	67h
	Lumens	Run Time

2755CC Headlamp

Light Source
LED
Batteries
3 AAA Alkaline (included)
Length
2.25" (5.7 cm)
Modes
High / Low / Flashing
Certifications
CI, D1, IECEx ia




UP TO	72	15h
	Lumens	Run Time



3315CC

Light Source
LED
Batteries
3 AA Alkaline (included)
Length
6.14" (15.6 cm)
Modes
On / Off
Certifications
CI II II, D1, IECEx ia




UP TO	130	16h 30m
	Lumens	Run Time



3415MCC

Light Source
LED
Batteries
3 AA Alkaline (not included)
Length
7.44" (18.9 cm)
Modes
High / Flashing
Spot / Flood / Both
Certifications
CI II II, D1, IECEx ia




3415MCC Includes
Magnetic Clip

UP TO	258	13h
	Lumens	Run Time



A full-page background image showing two rescue workers in red jackets and helmets working in a snowy mountain environment at night. A bright, powerful light from a Pelican RALS system illuminates the scene. One worker is standing on the left, and the other is kneeling on the right, working with a red equipment case. A yellow generator unit is visible in the snow in the background.

Remote Area Lighting Systems (RALS)

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Pelican's RALS line is the modern alternative to generator based lighting:

- Silent Performance
- No Exhaust Fumes
- No Flammable Fuel
- Remote Activation
- Eliminated Trip Hazards
- Little To No Heat

9430 RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

15.75" (40 cm) Closed,
32.28" (82 cm) Deployed

Modes

High / Low

Beam Spread

125°, 6 LEDs



UP TO	1600	15h
	Lumens	Run Time

9430SL Spot Light RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

15.75" (40 cm) Closed,
32.28" (82 cm) Deployed

Modes

High / Low

Beam Spread

10°, 24 LEDs



UP TO	2000	15h
	Lumens	Run Time

9440 RALS

Light Source

LED

Batteries

Lithium-Ion

Dimensions

37.4" (95 cm) Closed,
85" (215.8 cm) Deployed

Modes

High / Medium / Low

Beam Spread

20°, 10 LEDs



UP TO	5300	8h
	Lumens	Run Time

9455 Safety Light RALS

Light Source

LED

Batteries

NiMH

Dimensions

15.35" (39 cm) Closed,
31.50" (80 cm) Deployed

Modes

High / Low / Flashing

Beam Spread

125°, 10 LEDs

Certifications

Cl, D1, IECEx ia, ATEX Zone 0



UP TO	1600	10h
	Lumens	Run Time



9460 / 9460M RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

23.25" (59.1 cm) Closed,
79.50" (201.9 cm) Deployed

Modes

Variable Light Output / Flashing / 3 Preset Levels

Beam Spread

120°, 10 LEDs per head, 2 lamp heads



UP TO	12000	24h
	Lumens	Run Time



9460



9460M



9460, 9460M, 9470, 9470M RALS Features



12V Power Supply With Dual USB Adapter

12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps) or a variety of USB connections.



Multi-Terrain Trolley (Only On 9460M, 9470M RALS)

Large 1.5 inch polyurethane wheels allow for easier transport across rough surfaces. Molded feet level and stabilize case.



Intelligent Control System calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.

9470 / 9470M RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

24.75" (62.9 cm) Closed,
80.00" (208.3 cm) Deployed

Modes

Variable Light Output / Flashing / 3 Preset Levels

Beam Spread

120°, 10 LEDs per head, 4 lamp heads



UP TO	24000	24h
	Lumens	Run Time



9470



9470M



9480 RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

15.50" (39.4 cm) Closed,
23.75" (60.3 cm) Deployed

Modes

High / Medium / Low / Flashing

Beam Spread

125°, 8 LEDs



UP TO **4000** **28h**
Lumens Run Time



Battery Level Indicator
Full time battery level indication.

9730 RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

8.25" (21 cm) Closed,
39.50" (100.33 cm) Deployed

Modes

High / Medium / Low & Rear

Beam Spread

125°, 2 LEDs



UP TO **4800** **13h**
Lumens Run Time



9490 RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

20" (50.8 cm) Closed,
72" (182.9 cm) Deployed

Modes

High / Medium / Low / Flashing / (6000-Variable)

Beam Spread

125°, 10 LEDs



UP TO **6000** **24h**
Lumens Run Time



Intelligent Control System calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.

9750 RALS

Light Source

LED

Batteries

Sealed Lead Acid

Dimensions

8.25" (21 cm) Closed,
39.50" (100.33 cm) Deployed

Modes

High / Medium / Low / Spot / Flood /
Spot & Flood / Rear & Boost

Beam Spread

125°, 8 LEDs



UP TO **4900** **24h**
Lumens Run Time



9480, 9490 RALS Features



Swappable Power Pack

Swappable power pack w/12v aux. port adapter powers smartphones, laptops, etc.

9730, 9750 RALS Features




Rear-facing Puddle Light

Improves safety by increasing ground illumination around the unit.



Real-time Battery Display

Enables users to monitor and manage battery level by runtime or lumen output.

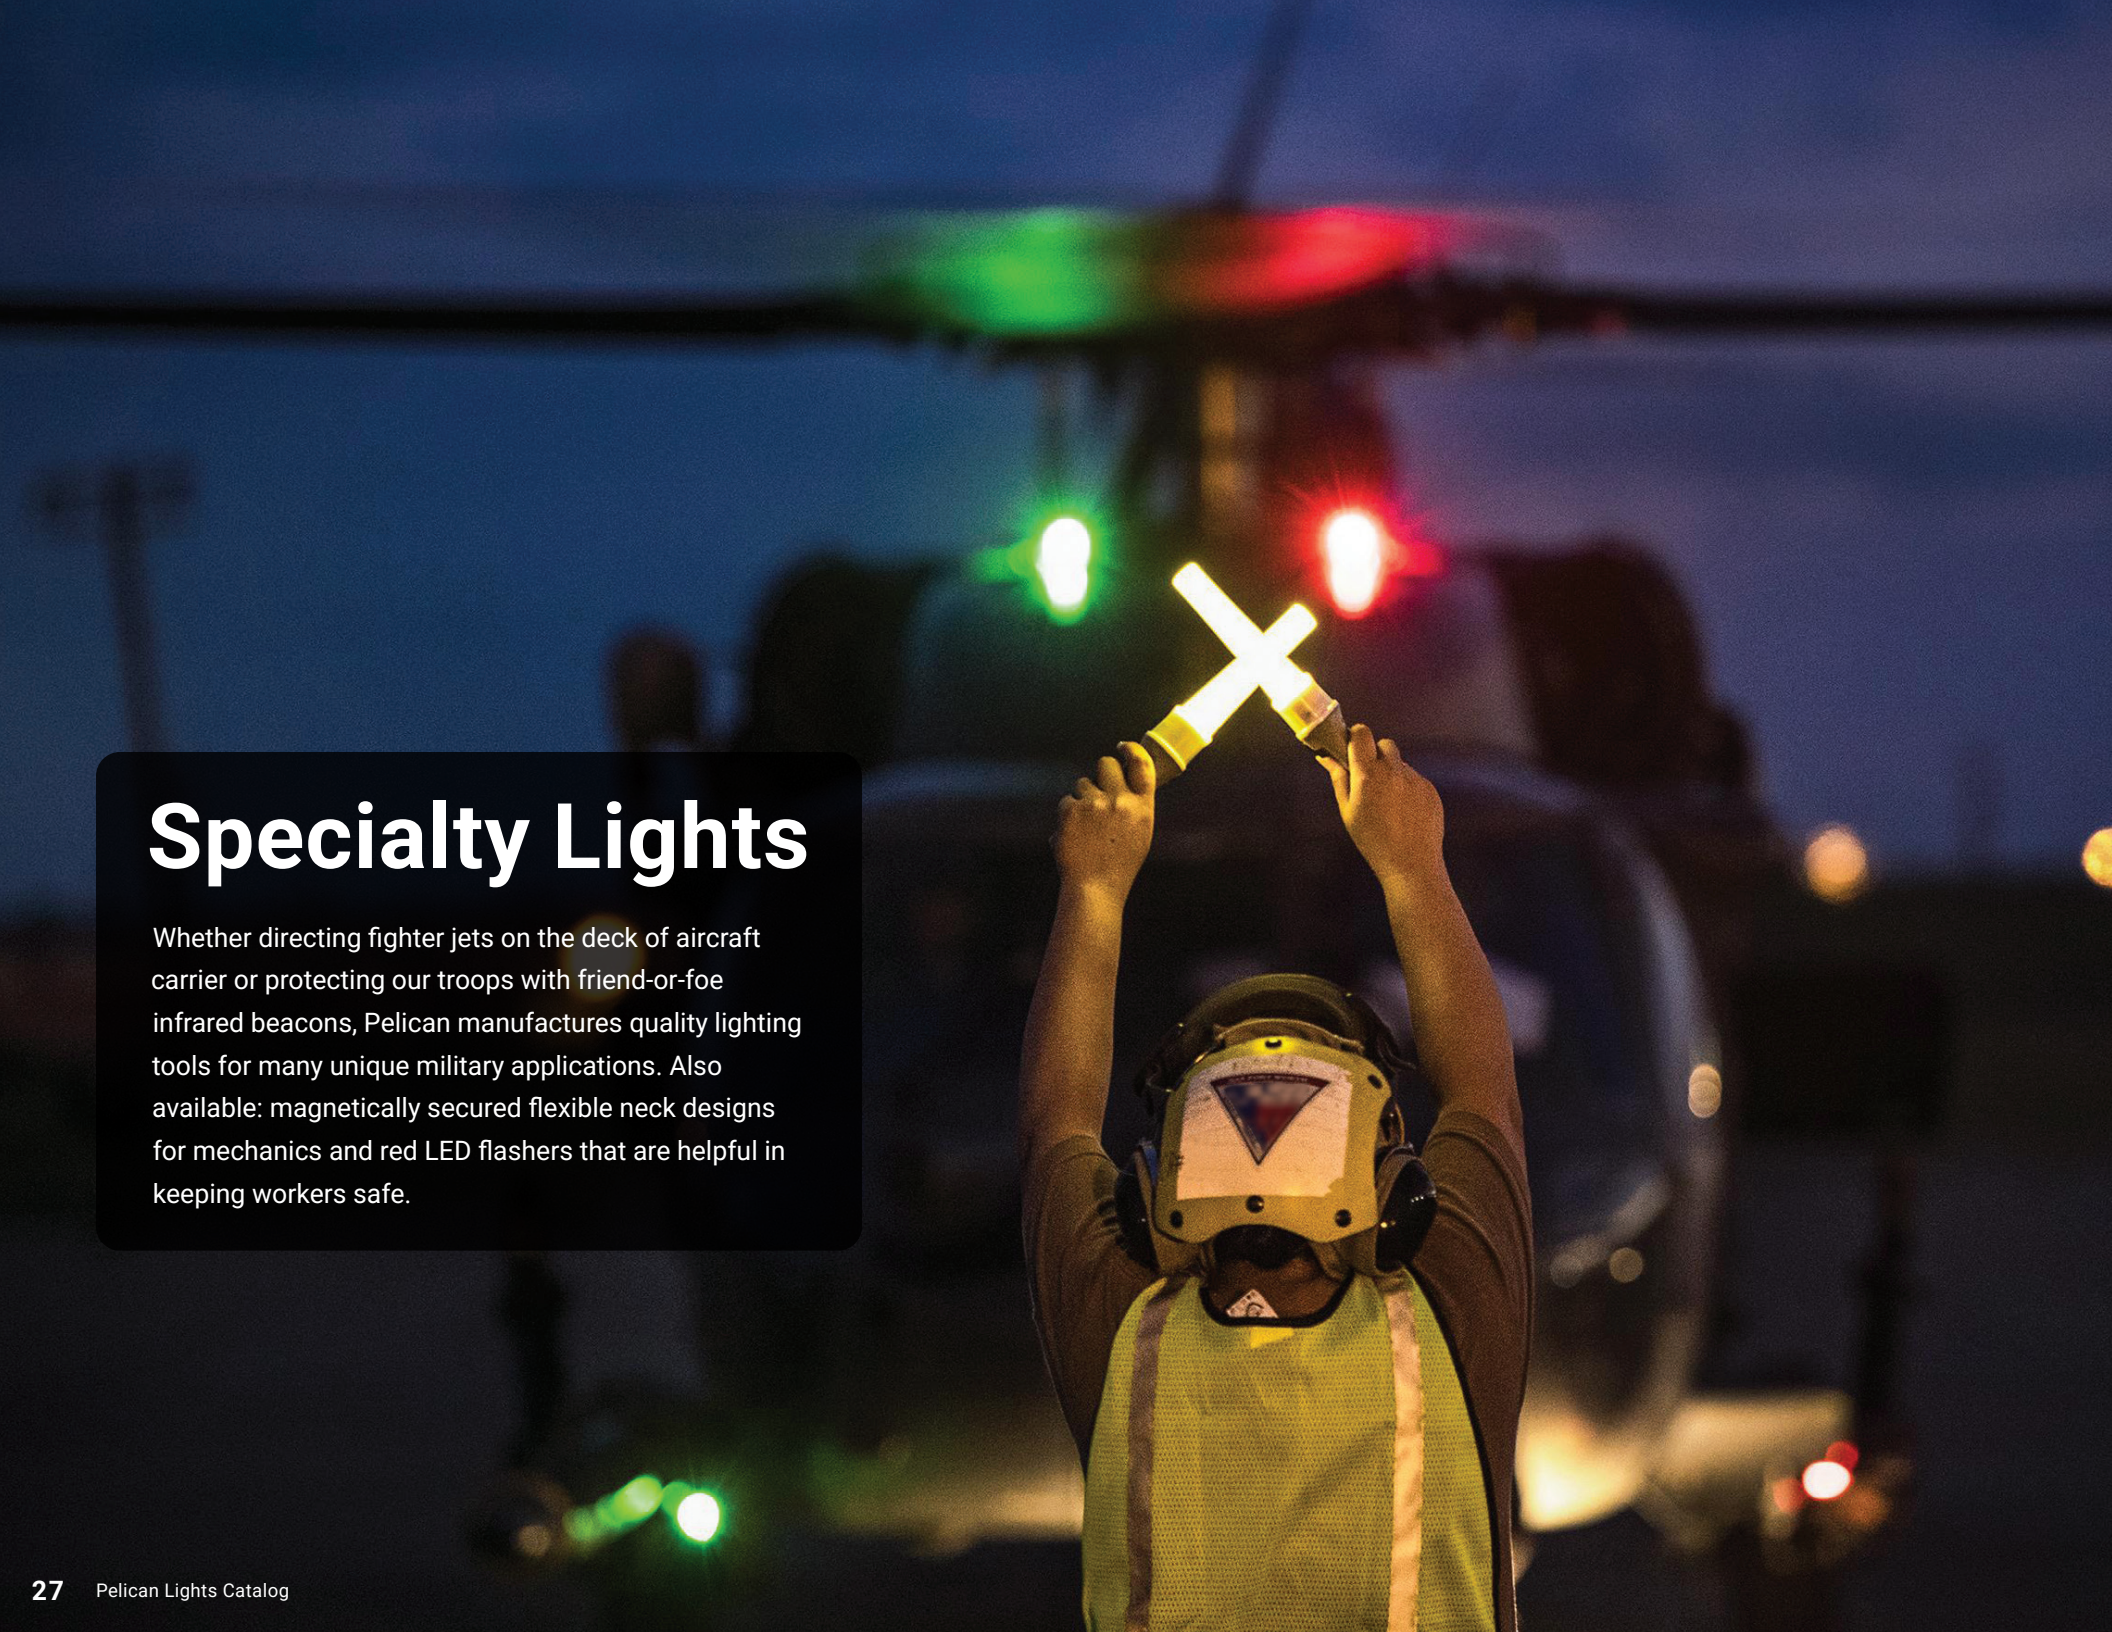

Specialty Lights

Whether directing fighter jets on the deck of aircraft carrier or protecting our troops with friend-or-foe infrared beacons, Pelican manufactures quality lighting tools for many unique military applications. Also available: magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.

Mini Flasher™ 2130

Light Source

LED

Batteries

2 L1154 Alkaline (included)

Length

1.73" (4.4 cm)



Mini Flasher™ 2130IR

Light Source

LED (infrared)

Batteries

2 L1154 Alkaline (included)

Length

1.73" (4.4 cm)



2490 with Traffic Wand

Light Source

Recoil™ LED

Batteries

4 AA Alkaline (not included)

Length

12.5" (31.7 cm)



64

Lumens

12h

Run Time

2365 Flex Neck

Light Source

LED

Batteries

2 AA Alkaline (not included)

Length

21.92" (55.7cm)



65

Lumens

7h

Run Time



Holster and Wand Accessories



CAT. NO. (Description)	2407 Nylon Holster	7077 Plain Leather Holster	7078 Nylon Holster	7106 Nylon Holster	7108 Composite Holster	7116 Nylon Holster
Compatible Lights	2410 2410PL 2460	7060	7060	7100	7100 7110	7110



CAT. NO. (Description)	7606 Nylon Holster	7607 Nylon Holster / Wand Kit	7608 Composite Holster	7616 Nylon Holster	7617 Nylon Holster / Wand Kit	7627 Nylon Holster / Wand Kit	8057 Nylon Holster
Compatible Lights	7600	7600	7600 7610 7620	7610	7610	7620	8050



Specifications

	CAT NO.	Batteries (included unless noted)	Weight with Batteries (kg)	Length (cm)	ANSI Light Output	ANSI Run Time	ANSI Beam Distance (meters)	ANSI Peak Beam Intensity (candela)	ANSI IPX Rating	Certifications	Colors
Safety Certified Lights	1930	4 LR 44 Alkaline	0.9 oz. (0.03)	2.64" (6.7)	12	4h 15m	17	70	IPX4	CI, D1/CI II, D2 IECEX ia	■ ■
	1975	2 AAA Alkaline	1.9 oz. (0.05)	5.75" (14.6)	117	2h 15m	24	141	IP68	CI II III, D1	■
	1975i	2 AAA Alkaline	1.9 oz. (0.05)	5.75" (14.6)	117	2h 15m	24	141	IP68	IECEX ia	■
	2010	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■ ■
	2010PL	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■
	2220	2 CR2032 Lithium	1.0 oz. (0.03)	3.50" (8.9)	9	34h	12	38	IPX4	CI, D1	■
	2315	2 AA Alkaline	4.6 oz. (0.13)	6.22" (15.8)	115	6h	75	1403	IPX8	CI II III, D1, IECEX ia	■
	2410	4 AA Alkaline	7.3 oz. (0.21)	7.00" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1 IECEX ia	■ ■
	2410PL	4 AA Alkaline	7.3 oz. (0.21)	7.00" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1 IECEX ia	■
	2460	4 Rechargeable NiMH	7.8 oz. (0.22)	7.00" (17.8)	183	5h	179	8050	IPX7	CI II, D2	■
	3315	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IP67	CI II III, D1 IECEX ia	■ ■
	3315PL	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IP67	CI II III, D1 IECEX ia	■ (photoluminescent)
	3325	3 AA Alkaline	6.1 oz. (0.17)	6.06" (15.4)	171	16h	136	4558	IPX7	CI II II, D1 IECEX ia	■
	3335R	1 Rechargeable Lithium-Ion	4.6 oz. (0.13)	6.11" (15.5)	246*, 30***	6h 15m*, 58h***	151*, 51***	5718*, 649***	IP67	CI, D1 IECEX ia, InMetro	■
	3345	3 AA Alkaline (not included)	7.5 oz. (0.21)	7.25" (18.4)	280 ^{S/F} , 117 ^F , 219 ^S	7h ^{S/F} , 14h ^F , 12h ^S	126 ^{S/F} , 16 ^F , 137 ^S	3990 ^{S/F} , 60 ^F , 4724 ^S	IPX7	CI II III, D1 IECEX ia	■
	9415	4 Rechargeable NiMH	49.3 oz. (1.4)	8.75" (22.2)	588*, 224***	4h 30m*, 11h 30m***	288*, 176***	20792*, 7787***	IPX4	CI, D1	■
	9415i	4 Rechargeable NiMH	58.2 oz. (1.65)	8.75" (22.2)	392*, 144***	4h 30m*, 11h***	392*, 234***	32767*, 13747***	IPX4	IECEX ia, ATEX Zone 0	■

*High | ***Low | ^S Spot | ^F Flood | Additional approvals may apply. For details go to www.pelican.com

Performance Data Is To FL 1 Standards (Applies to Flashlights Only)

	CAT NO.	Batteries (Included unless noted)	Weight with Batteries (kg)	Length (cm)	ANSI Light Output	ANSI Run Time	ANSI Beam Distance (meters)	ANSI Peak Beam Intensity (candela)	ANSI IPX Rating	Certifications	Colors
Safety Certified Right Angle and Articulating Lights	3415 / 3415M	3 AA Alkaline (not included)	9.0 oz. (0.25)	7.44" (18.9)	336 ^{S/F} , 177 ^F , 186 ^S	6h ^{S/F} , 15h ^F , 14h ^S	133 ^{S/F} , 37 ^F , 135 ^S	4418 ^{S/F} , 336 ^F , 4544 ^S	IPX8	CI II III, D1, IECEx ia	
	3610	4 AA Alkaline	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1, IECEx ia	
	3610PL	4 AA Alkaline	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1, IECEx ia	
	3715	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1, IECEx ia	
	3715PL	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1, IECEx ia	
	3765	4 Rechargeable NiMH	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1	
	3765PL	4 Rechargeable NiMH	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1	
Safety Certified Headlamps	2610	3 AAA Alkaline	3.2 oz. (0.09)	1.49" (3.8)	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	CI, D1, IECEx ia	
	2690	3 AAA Alkaline	4.1 oz. (0.12)	2.81" (7.1)	74	11h	92	2124cd	IPX7	CI II III, D1, IECEx ia	
	2745	3 AAA Alkaline	3.3 oz. (0.09)	2.25" (5.7)	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IP54	CI, D1, IECEx ia	
	2755	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	118*, 60***	7h 30m*, 16**	60*, 43***	910*, 454***	IP54	CI, D1, IECEx ia	
	2765	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	155*, 132**, 78***, 34****	6h 15m*, 5h 30m**, 8h***, 14h****	107*, 93**, 63***, 9****	2876*, 2163**, 978***, 18****	IP54	CI, D1, IECEx ia	
	2785	4 AA Alkaline	8.8 oz. (0.25)	3" (7.6)	215*, 106**, 22***	5h*, 13h**, 98h***	108*, 76**, 34***	2911*, 1445**, 290***	IP54	CI, D1, IECEx ia	
High Performance Lights	1810	4 LR 41 Alkaline	0.5 oz. (0.01)	1.5" (3.8)	16	8h 45m	23	137	IPX4	N/A	
	1910	1 AAA Alkaline	1.5 oz. (0.04)	3.8" (9.6)	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	
	1920	2 AAA Alkaline	2.2 oz. (0.06)	5.5" (14)	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	
	1970	2 AAA Alkaline	1.8 oz. (0.05)	5.75" (14.6)	139	4h 15m	29	205	IPX4	N/A	
	2310	2 AA Alkaline	4.6 oz. (0.13)	6.22" (15.8)	350*, 25***	2h 15m*, 27h***	134*, 36***	4516*, 324***	IPX8	N/A	
	3310PL	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	 (photoluminescent)
	3310ELS	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	 (photoluminescent)
	3410 / 3410M	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	653*, 97**, 25***	5h*, 19h*, 61h*	184*, 67**, 34***	8504*, 1129**, 292***	IPX8	N/A	 (photoluminescent)
	9050	2 Rechargeable Lithium-Ion	45.9 oz. (1.30)	8.03" (20.4)	3369 ^{S/F} , 1119 ^F , 2523 ^S 301 ^{S/F} , 291 ^F , 354 ^S	2h 45m ^{S/F} , 5h 30m ^F , 4h 15m ^S 11h ^{S/F} , 11h ^F , 13h 30m ^S	417 ^{S/F} , 47 ^F , 489 ^S 110 ^{S/F} , 24 ^F , 117 ^S	43568 ^{S/F} , 559 ^F , 59760 ^S 3011 ^{S/F} , 149 ^F , 7846 ^S	IP67	N/A	

*High | **Medium | ***Low | ****Downcast | ^S Spot | ^F Flood | Additional approvals may apply. For details go to www.pelican.com

Specifications

	CAT NO.	Batteries (included unless noted)	Weight with Batteries (kg)	Length (cm)	ANSI Light Output	ANSI Run Time	ANSI Beam Distance (meters)	ANSI Peak Beam Intensity (candela)	ANSI IPX Rating	Certifications	Colors
5 Series Lights	5000	2 AAA Alkaline	2.4 oz. (0.07)	5.59" (14.2)	202*, 21***	1h 15m*, 7h***	69*, 21***	1176*, 111***	IPX8	N/A	■
	5010	2 AA Alkaline	5.1 oz. (0.15)	6.26" (15.9)	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8	N/A	■
	5020	4 AAA Alkaline	7.3 oz. (0.21)	5.87" (14.9)	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8	N/A	■
	5050R	1 Rechargeable Lithium-Ion	5.8 oz. (0.16)	6.16" (15.6)	883 ^B , 393*, 21***	N/A ^B , 2h 30m*, 40h***	201 ^B , 134*, 30***	10093 ^B , 4488*, 224***	IPX8	N/A	■
High Performance Tactical Lights	2350	1 AA Alkaline	3.4 oz. (0.1)	4.23" (10.7)	178*, 15***	2h 15m*, 21h***	130*, 37***	4196*, 345***	IPX7	N/A	■
	2360	2 AA Alkaline	5.4 oz. (0.15)	6.2" (15.7)	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
	2370	2 AA Alkaline	6.5 oz. (0.18)	6.43" (16.3)	358*, 35***	2h*, 11h***	190*, 57***	9000*, 823***	IPX7	N/A	■
	7000	2 CR123 Lithium	5.6 oz. (0.16)	5.31" (13.5)	774*, 457**, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■
	7060	1 Rechargeable Lithium-Ion	10.4 oz. (0.29)	8.65" (22)	535*, 218**, 26***	3h 45m*, 12h**, 68h***	207*, 131**, 44***	10707*, 4297**, 481***	IPX4	N/A	■
	7100	1 Rechargeable Lithium-Ion	4.4 oz. (0.13)	5.12" (13)	695*, 348**, 33***	1h 15m*, 1h 30m**, 9h 15m***	194*, 130**, 38***	9413*, 4247**, 358***	IPX8	N/A	■
	7110	1 AA Alkaline (included) or 1 CR123 (not included)	4.1 oz. (0.12)	4.63" (11.8)	445*, 214**, 23***	1h*, 1h 30m**, 13h***	93*, 62**, 20***	6053*, 2695**, 288***	IPX8	N/A	■
	7600	1 Rechargeable Lithium-Ion	6.9 oz. (0.20)	6.19" (15.7)	1080*, 547**, 46***	5h 12m*, 7h 18m**, 37h 30m***	226*, 169**, 45***	12736*, 6305**, 516***	IPX8	N/A	■
	7610	1 AA Alkaline (included) or 2 CR123 (not included)	5.5 oz. (0.16)	5.44" (13.8)	1018*, 531**, 25***	1h 30m*, 2h**, 33h***	227*, 151**, 33***	12856*, 5674**, 273***	IPX8	N/A	■
High Performance Headlamps	7620	2 AA Alkaline (included) or 3 CR123 (not included)	6.9 oz. (0.20)	6.75" (17.1)	1124*, 528**, 28***	2h*, 3h**, 37h***	243*, 155**, 35***	14824*, 5974**, 315***	IPX8	N/A	■
	8060	4 Rechargeable NiMH	23.2 oz. (0.66)	12.67" (32.2)	1072*, 551**, 29***	3h 45m*, 4h 15m**, 60h***	376*, 265**, 60***	35300*, 17520**, 889***	IPX6	N/A	■
	2720	3 AAA Alkaline	3.8 oz. (0.11)	2.48" (6.3)	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline	3.3 oz. (0.09)	2.25" (5.7)	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
	2750	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ ■ (photoluminescent)
	2760	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	289*, 156**, 97***, 42****	1h 30m*, 3h 15m**, 5h 30m***, 11h****	101*, 66**, 48***, 19****	2540*, 1097**, 567***, 88****	IPX4	N/A	■
	2780	4 AA Alkaline	8.8 oz. (0.25)	3" (7.6)	430*, 203**, 53***	1h 30m*, 3h**, 12h***	124*, 81**, 27***	3868*, 1625**, 425***	IPX7	N/A	■ □ ■ (photoluminescent)
	2780R	1 Rechargeable Lithium-Ion	7.3 oz. (0.21)	3" (7.6)	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ □ ■ (photoluminescent)

*High | **Medium | ***Low | ****Downcast | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	Batteries (Included unless noted)	Weight with Batteries (kg)	Length (cm)	ANSI Light Output	ANSI Run Time	ANSI Beam Distance (meters)	ANSI Peak Beam Intensity (candela)	ANSI IPX Rating	Certifications	Colors
Correct Color Lights	2750CC	3 AAA Alkaline	3.4 oz. (0.10)	2.25" (5.7)	183*, 50***	2h 30m*, 11h***	63*, 31***	989*, 240***	IPX4	N/A	■ (photoluminescent)
	2755CC	3 AAA Alkaline	3.4 oz. (0.10)	2.25" (5.7)	72*, 36***	6h 45m*, 15h***	50*, 35***	632*, 302***	IP54	CI D1, IECEX ia	■
	3310CC	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	283*, 31***	8h*, 175h***	169*, 50***	7150*, 625***	IPX8	N/A	■ (photoluminescent)
	3315CC	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	130	16h 30m	110	3042	IP67	CI II III, D1, IECEX ia	■
	3410MCC	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	484*, 64**, 17***	4h*, 20h**, 67h***	155*, 56**, 29***	5991*, 796**, 205***	IPX8	N/A	■ (photoluminescent)
	3415MCC	3 AA Alkaline (not included)	9.0 oz. (0.25)	7.44" (18.9)	258 ^{S/F} , 127 ^F , 144 ^S	5h ^{S/F} , 13h ^F , 13h ^S	111 ^{S/F} , 30 ^F , 109 ^S	3109 ^{S/F} , 231 ^F , 2998 ^S	IPX8	ETL, CI II III, D1, IECEX ia	■
Specialty Lights	2130	2 L1154 Alkaline	0.5 oz. (0.01)	1.73" (4.4)	4.7 (non ANSI)	130h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2130IR	2 L1154 Alkaline	0.5 oz. (0.01)	1.73" (4.4)	N/A	65h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2365	2 AA Alkaline (not included)	9.3 oz. (0.26)	21.92" (55.7)	65	7h	81	1644	IPX4	N/A	■
	2490	4 AA Alkaline (not included)	8.2 oz. (0.23)	12.5" (31.7)	64	12h	118	3459	IPX7	N/A	■
	CAT. NO.	Batteries (included)	Weight with Batteries (kg)	Length (cm)	Lumens	Run Time	Beam Spread	Number of LEDs	Lamp Heads	Certifications	Colors
Remote Area Lighting Systems	9430	Rechargeable, Sealed Lead Acid	22.65 lbs. (10.27)	32.28" (82) ^A	3000*, 1500***	8h*, 15h***	125°	6	1	N/A	■ ■
	9430SL	Rechargeable, Sealed Lead Acid	22.05 lbs. (10)	32.28" (82) ^A	2000*, 1000***	8h*, 15h***	10°	24	1	N/A	■
	9440	Rechargeable Lithium Ion	16.09 lbs. (7.3)	85" (215.8) ^A	5300*, 2800**, 1400***	1h 30m*, 4h**, 8h***	125°	12	1	N/A	■ ■
	9455	Rechargeable NiMH	16 lbs. (7.3)	31.50" (80) ^A	1600*, 800***	5h*, 10h***	125°	10	1	CI D1, IECEx ia, ATEX Zone 0	■ High Visibility Yellow
	9460	Rechargeable, Sealed Lead Acid	61 lbs. (27.7)	79.50" (201.9) ^A	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
	9460M	Rechargeable, Sealed Lead Acid	64 lbs. (24.95)	79.50" (201.9) ^A	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
	9470	Rechargeable, Sealed Lead Acid	105 lbs. (47.6)	82.00" (208.3) ^A	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
	9470M	Rechargeable, Sealed Lead Acid	108lbs. (49)	82.00" (208.3) ^A	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
	9480	Rechargeable, Sealed Lead Acid	27.50 lbs. (12.47)	23.75" (60.3) ^A	4000*, 3000**, 1000***	6h*, 8h**, 28h***	125°	8	1	N/A	■ ■
	9490	Rechargeable, Sealed Lead Acid	32 lbs. (14.51)	72" (182.8) ^A	6000 (variable)	3h 30m*, 12h**, 24h***	125°	10	1	N/A	■ ■
	9730	Rechargeable, Sealed Lead Acid	18.55 lbs. (8.4)	13.50" (34.3) ^A	4800*, 2000**, 1000***	3h 30m*, 7h**, 13h***	125°	2	1	N/A	■ ■
	9750	Rechargeable, Sealed Lead Acid	24.33 lbs. (11)	13.50" (34.3) ^A	4900*, 2000**, 1100***	5h 45m*, 11h**, 24h***	125°	8	1	N/A	■ ■

*High | **Medium | ***Low | ^B Boost | ^S Spot | ^F Flood | ^A Extended Height | Additional approvals may apply. For details go to www.pelican.com

Performance Data Is To FL 1 Standards (Applies to Flashlights Only)

Custom Branding

Pelican Products offers the ultimate selection in corporate branding. You can put your company name and logo or a special statement on many Pelican™ lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and molding programs. Laser etching is also available for many of the metal bodied lights.



Custom Colors

Our production department can match the light body to the color of your choice. *Minimum quantities apply.*



Graphic Design Studio

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.




Hot Stamping

Our hot stamping department is equipped with the latest technology in custom imprinting. *Minimum quantities apply.*



Laser Etching

Available only on metal bodied lights. *Minimum quantities apply.*

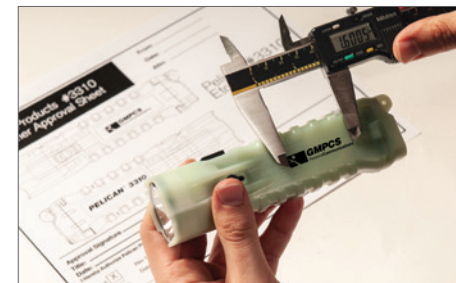

100% Accuracy

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.

Customization options vary by light. Please contact your Pelican Account Executive or request a quote at business.pelican.com.



Flashlights/Headlamps

Pelican Limited Lifetime Guarantee Of Excellence

Pelican Products, Inc. ("Pelican") guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. Pelican will either repair or replace any defective product, at our sole option. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Lifetime warranty does not cover Remote Area Lighting Systems products.

In Australia: www.pelican.com/warranty/

For complete warranty details: www.pelican.com/warranty/

U.S.A.

California

23215 Early Avenue
Torrance, CA 90505
Tel: (310) 326-4700
Toll Free: (800) 473-5422
Fax: (310) 326-3311
www.pelican.com

Massachusetts

147 North Main Street
South Deerfield, MA 01373
Tel: (800) 542-7344
Fax: (413) 665-8330
www.pelican.com

Minnesota

Pelican BioThermal Headquarters
10050 89th Avenue North
Maple Grove, MN 55369
Tel: (763) 412-4800
Toll Free: (877) 537-9800
www.pelicanbiothermal.com

International

Australia

Pelican Products Pty Ltd
2 Forbes Close,
Knoxfield, VIC 3180
Tel: +61 (03) 9765 1500
www.pelican.com/au

Korea

Pelican Products Korea Ltd
#27, Dongmak-ro 14-gil,
Mapo-gu, Seoul, Republic of Korea (04074)
Tel: +82 2 6092 4700
Fax: +82 2 6739 4700
www.pelicanproducts.co.kr

Canada

Pelican Products ULC
10221-184th Street
Edmonton, Alberta
T5S 2J4 Canada
Tel: +780 481 6076
Toll Free: +866 273 5422
Fax: +780 481 9586
www.pelican.com/ca

Japan

Pelican Products K.K.
Nisso 22 Bldg 9F
1-11-10 Azabu Dai
Minato ward Tokyo
106-0041 Japan
Tel: +81 33 585 9100
Fax: +81 33 585 9109
www.pelican.com/jp

China

Pelican Products China Representative Office
Pine City Building, Room 1026
777 Zhaojiabang Road
Shanghai, China 200032
Tel: +86 21 64189685
Fax: +86 21 64189679
www.pelican.com/cn

Latin America

23215 Early Avenue
Torrance, California 90505 USA
Tel: +1 310 326 4700
Fax: +1 310 326 3311
www.pelican.com

Europe / Middle East / Africa / India

Peli Products, S.L.U.
c/ Provença, 388, Planta 6
08025 · Barcelona, Spain
Tel: +34 934 674 999
www.peli.com

SE Asia and Rest of Asia

(Hong Kong, Macau, Taiwan, Pakistan)
19 Tukang Innovation Drive
Greenhub #04-01
Singapore 618301
Tel: +65 9298 3322
Fax: +82 2 6739 4700
www.pelican.com

23215 Early Avenue, Torrance, California 90505, USA



©2026 Pelican Products, Inc.

UNITED is a registered trademark of United Airlines, Inc. NYPD is a trademark of the City of New York. All other trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

Part No. 0030-000-200 AU/26

PELICAN.COM

Remote Area Lighting Systems

1 Year Limited Warranty

Pelican Products, Inc. ("Pelican") guarantees its Remote Area Lighting Systems (RALS) against defects in materials and workmanship under normal use, service, and maintenance for a period of one year from the date of purchase. With valid dated proof of purchase, Pelican will either repair or replace any defective product, at our sole option. All warranty claims of any nature are barred if the product has been altered or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

In Australia: www.pelican.com/warranty/

For complete warranty details: www.pelican.com/warranty/