

PELI™ FLASHLIGHTS

CATALOGUE

JANUARY 2022



SINCE 1976



LIFETIME GUARANTEE\*

Register for  
our newsletter!



# + TABLE OF CONTENTS

PERFORMANCE PELI FLASHLIGHTS	3
SAFETY	4-5
PELI FLASHLIGHTS	
Small Lights	6
Medium Torches	7-8
Large Lights	9
Atex Torches	10-13
Tactical Lights	14-15
Headlamps	16-17
PELI LIGHT MOUNTING & HOLSTER	18
LIGHTING FEATURES	18
SPECIFICATIONS	19-21
FULL LINE OVERVIEW	22-23

## PELI™ FLASHLIGHTS

When you're in a situation that requires a lighting tool, you want to make sure you have the right one. Since 1976, PELI has illuminated the world's darkest and most dangerous places with specialised, professional lighting tools, including ATEX approved models, to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools enable you to accomplish your tasks in a safer and more efficient manner.

Engineered in the U.S  
and Guaranteed for Life.



Photo by Uros Podlogar

# PERFORMANCE PELI FLASHLIGHTS

## + STANDARDS AND RATINGS (Applicable to torches only)



### LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



### PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



### RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



### WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



### BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



### WATER PROOF/SUBMERSIBLE

**Water Proof // IPX7** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.  
**Submersible // IPX8** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

## ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

## + GLOSSARY OF TERMS

**CANDELA** A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

**LUX** The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

**LUMEN** A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

**INTEGRATING SPHERE** An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

**IP (INGRESS PROTECTION)** – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

**RECHARGEABLE** Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



# SAFETY

## IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exacting requirements of ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

CE II 1G EX IA OP IS IIC T4 GA

ATEX code corresponding to the 1975Z0 torch

Need more information about ATEX?  
Please visit [www.peli.com/atex](http://www.peli.com/atex)



## + COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATIONS

Download our poster on ATEX Directive 2014/34/EU.




HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	<ul style="list-style-type: none"> <li>– Oil Refinery –</li> <li>– Paint Warehouse –</li> <li>– Offshore Oil Rig –</li> <li>– Spray Booth –</li> </ul>	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS II	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	<ul style="list-style-type: none"> <li>– Coal Mine –</li> <li>– Grain Silo –</li> <li>– Munitions Factory –</li> <li>– Hay Storage Facility –</li> </ul>	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	↑
			Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III	Ignitable Fibers & Flyings (Machined Magnesium)	<ul style="list-style-type: none"> <li>– Paper Mill –</li> <li>– Woodworking Facility –</li> <li>– Textile Mill –</li> <li>– Cotton Gin –</li> </ul>	Division 1 (Hazard Likely)	N/A	↓ LEAST
			Division 2 (Hazard Not Likely)	N/A	

\* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS		EUROPEAN CLASSIFICATIONS	
<b>Division 1:</b> Where volatile substances can exist all of the time or some of the time under normal operating conditions.	<b>Division 2:</b> Where volatile substances are not likely to exist under normal operating conditions.	<b>Category 1 / Zone 0:</b> Flammable material present for long periods (more than 1.000 hours* a year).	<b>Category 3 / Zone 2:</b> Flammable material present for short periods (less than 10 hours* a year).
		<b>Category 2 / Zone 1:</b> Flammable material present in normal operation (10- 1.000 hours* a year).	

\* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

## + DIAGRAM OF CLASS / DIVISIONS / ZONES

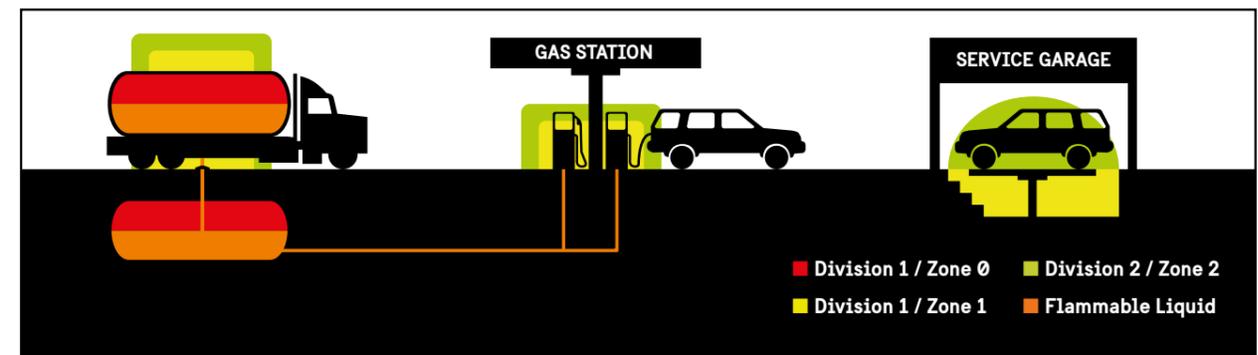

# SMALL LIGHTS

When compact is a must or just a convenience, choose from Peli's range of powerful lights. Whether composite or alloy, certified or coloured, you'll find the perfect model for your next job.



## 1910

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
1 AAA Alkaline (included)  
**LENGTH//**  
9.7 cm (3.8")  
**MODES//**  
High / Low



**LUMENS**  
**106**  
RUN TIME  
**4h**  
UP TO

## 1920

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 AAA Alkaline (included)  
**LENGTH//**  
14.0 cm (5.5")  
**MODES//**  
High / Low



**LUMENS**  
**224**  
RUN TIME  
**8h 45m**  
UP TO

## 1930 L1™

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 LR 44 Alkaline (included)  
**LENGTH//**  
6.7 cm (2.64")  
**CERTIFICATIONS//**  
CI, D1/CII, D2 IECEx ia



**LUMENS**  
**12**  
RUN TIME  
**4h 15m**  
UP TO  
**SAFETY CERTIFIED**

# MEDIUM TORCHES

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your torch in an emergency.



## 2010 SABRELITE™

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 C Alkaline (not included)  
**LENGTH//**  
20.6 cm (8.11")  
**CERTIFICATIONS//**  
CI II III, D1 IECEx ia



**LUMENS**  
**161**  
RUN TIME  
**22h**  
UP TO



## 2410 STEALTHLITE™ LED

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 AA Alkaline (included)  
**LENGTH//**  
17.8 cm (7")  
**CERTIFICATIONS//**  
CI II III, D1 IECEx ia



**LUMENS**  
**126**  
RUN TIME  
**7h 30m**  
UP TO

## 2460 STEALTHLITE™

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 NiMH (included)  
**LENGTH//**  
17.8 cm (7")  
**CERTIFICATIONS//**  
CI II, D2



**LUMENS**  
**183**  
RUN TIME  
**5h**  
UP TO  
**SAFETY CERTIFIED**

# LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Peli is also a leader of high performance lithium-ion technology in portable lighting.

## 3310PL PHOTOLUMINESCENT

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 AA Alkaline (included)  
**LENGTH//**  
15.6 cm (6.14")  
**MODES//**  
High / Low / Flashing  
(torch body glows in the dark)



## 3310 ELS (EMERGENCY LIGHTING SYSTEM)

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 AA Alkaline (included)  
**LENGTH//**  
15.6 cm (6.14")  
**INCLUDES//**  
3310PL and Wall Mountable Case  
(torch body glows in the dark)



## 5000

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 AAA Alkaline  
**LENGTH//**  
14.2 cm (5.59")  
**MODES//**  
High / Low / Flashing



## 5010

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 AA Alkaline  
**LENGTH//**  
15.9 cm (6.26")  
**MODES//**  
High / Low / Flashing



## 5020

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 AAA Alkaline  
**LENGTH//**  
14.9 cm (5.87")  
**MODES//**  
High / Medium / Low / Flashing



## 5050R

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
1 18650 Lithium  
**LENGTH//**  
15.6 cm (6.16")  
**MODES//**  
Boost / High / Low / Flashing



## 5-SERIES TORCHES. IPX8 RATED.

Peli 5 Series lights feature slide beam technology. The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.



## 9410L LED LANTERN

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
6 Lithium-ion 18650 (included)  
**LENGTH//**  
22.2 cm (8.75")  
**MODES//**  
High / Low / Flashing  
Full Time Battery Indicator



# ATEX TORCHES

## Zone 0 & 1 (Cat. 1 & 2)



Peli's extensive range of Zone 0 and Zone 1 torches complies with the highest standards of the ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements.

Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.

PELI ATEX TORCHES



Download our poster on ATEX Directive 2014/34/EU.

### 1930Z0 L1™

LIGHT SOURCE// LED  
 BATTERIES// 4 LR 44 Alkaline (included)  
 LENGTH// 6.7 cm (2.64")  
 CERTIFICATIONS// II 1 G Ex ia op is IIC T6/T4 Ga



### 1975Z0 MITYLITE™

LIGHT SOURCE// LED  
 BATTERIES// 2 AAA Alkaline (included)  
 LENGTH// 14.6 cm (5.75")  
 CERTIFICATIONS// II 1 G Ex ia op is IIC T4 Ga



### 1975Z1 MITYLITE™

LIGHT SOURCE// LED  
 BATTERIES// 2 AAA Alkaline (included)  
 LENGTH// 14.6 cm (5.75")  
 CERTIFICATIONS// II 2 G Ex ib op is IIB T4 Gb



### 2010Z0 SABRELITE™

LIGHT SOURCE// LED  
 BATTERIES// 3 C Alkaline (not included)  
 LENGTH// 20.6 cm (8.11")  
 CERTIFICATIONS// II 1G Ex ia op is IIC T4/T3 Ga



Photoluminescent 2013PL Shroud

### 2220Z1 VB3™

LIGHT SOURCE// LED  
 BATTERIES// 2 CR2032 Lithium (included)  
 LENGTH// 8.9 cm (3.50")  
 CERTIFICATIONS// II 2 G Ex ib op is IIC T6 Gb



### FLASHLIGHT 2315Z0

LIGHT SOURCE// LED  
 BATTERIES// 2 AA Alkaline (included)  
 LENGTH// 15.8 cm (6.22")  
 CERTIFICATIONS// II 1 G Ex ia op is IIC T4 Ga, II 2 G Ex ib op is IIC T4 Gb



NEW



### 2410Z0 STEALTHLITE™

LIGHT SOURCE// LED  
 BATTERIES// 4 AA Alkaline (included)  
 LENGTH// 17.8 cm (7")  
 CERTIFICATIONS// II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



\* For more information on ATEX, see page 4-5

### 2460Z1 STEALTHLITE™

LIGHT SOURCE//  
LED  
BATTERIES//  
4 AA NiMH (included)  
LENGTH//  
17.8 cm (7")  
CERTIFICATIONS//  
II 2 G Ex ib IIC T3 Gb



### 2610Z0 HEADSUP LITE™

LIGHT SOURCE//  
LED  
BATTERIES//  
3 AAA Alkaline (included)  
LENGTH//  
3.8 cm (1.49")  
CERTIFICATIONS//  
II 1 G Ex ia op is IIC T4 Ga



### 2690Z0 HEADSUP LITE™

LIGHT SOURCE//  
LED  
BATTERIES//  
3 AAA Alkaline (included)  
LENGTH//  
7.1 cm (2.81")  
CERTIFICATIONS//  
I M1 Ex ia 1 Ma, II 1 G Ex ia IIC T4 Ga,  
II 1D Ex ia IIIC T65°C Da



### 2755Z0 HEADSUP LITE™

LIGHT SOURCE//  
LED  
BATTERIES//  
3 AAA Alkaline (included)  
LENGTH//  
5.7 cm (2.25")  
CERTIFICATIONS//  
II 1 G Ex ia op is IIC T4 Ga



### 2745Z0 HEADSUP LITE™

LIGHT SOURCE//  
LED  
BATTERIES//  
3 AAA Alkaline (included)  
LENGTH//  
5.7 cm (2.25")  
CERTIFICATIONS//  
II 1 G Ex ia op is IIC T4 Ga



### 2765Z0 HEADSUP LITE™

LIGHT SOURCE//  
LED  
BATTERIES//  
3 AAA Alkaline (included)  
LENGTH//  
5.7 cm (2.25")  
CERTIFICATIONS//  
II 1 G Ex ia op is IIC T4 Ga



### 3315Z0

LIGHT SOURCE//  
LED  
BATTERIES//  
3 AA Alkaline (included)  
LENGTH//  
15.6 cm (6.14")  
CERTIFICATIONS//  
II 1 G Ex ia IIC T4 Ga,  
II 1 D Ex ia IIIC T130°C Da



### 3610Z0 LITTLE ED™

LIGHT SOURCE//  
LED  
BATTERIES//  
4 AA Alkaline (included)  
LENGTH//  
19.1 cm (7.51")  
CERTIFICATIONS//  
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



### 3765Z0

LIGHT SOURCE//  
LED  
BATTERIES//  
4 AA NiMH (included)  
LENGTH//  
13.6 cm (5.36")  
CERTIFICATIONS//  
II 1 G Ex ia op is IIC T3 Ga



### 3415MZ0

LIGHT SOURCE//  
LED  
BATTERIES//  
3 AA Alkaline  
LENGTH//  
18.9 cm (7.44")  
CERTIFICATIONS//  
II 1 G Ex ia op is IIC T4 Ga



Includes magnetic clip



### 3715Z0

LIGHT SOURCE//  
LED  
BATTERIES//  
4 AA Alkaline  
LENGTH//  
13.6 cm (5.36")  
CERTIFICATIONS//  
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da



PhotoLuminescent 3713PL Shroud

### 9415Z0 LED LANTERN

LIGHT SOURCE//  
LED  
BATTERIES//  
4 C NiMH (included)  
LENGTH//  
22.2 cm (8.75")  
CERTIFICATIONS//  
II 1 G Ex ia IIC T4 Ga



## THE PELI 3715Z0 IS AN ABSOLUTE FAVOURITE

**SURVIVAL + STORIES**

Compact and it really packs a lot of light. The three types of light are really convenient for different purposes. For instance, the large light to explore incidents and the three small LED lights to read maps or walk in dark areas. I also use this light to train in our hazmat suits. The thick rubber gloves are not an issue when working with the light. The button on top is really good to operate and the grip on the side helped me during the training. This light is really impressive. Compared to our current lights, it really stands out!

Dutch firefighter - Fire Dpt. Brabant-Noord, Boxmeer

Photo by Guido Siebers

\* For more information on ATEX, see page 4-5. \*\* Only available upon min. order quantity

\* For more information on ATEX, see page 4-5

# TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.



PELI TACTICAL LIGHTS

## 7000

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 CR123 Lithium-Ion (Included)  
**LENGTH//**  
13.5 cm (5.31")  
**MODES//**  
High / Medium / Low / Strobe



LUMENS  
**774**  
RUN TIME  
UP TO  
**13h**

## 7060

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
1 Lithium-Ion 18650 (included)  
**LENGTH//**  
22 cm (8.65")  
**MODES//**  
High / Strobe / Medium / Low / Self Programmable



LUMENS  
**402**  
RUN TIME  
UP TO  
**57h**

## 7600

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
1 Lithium-Ion 18650 (included)\*  
**LENGTH//**  
15.7 cm (6.19")  
**MODES//**  
High / Strobe / Medium / Low / Full Time Battery Level Indication



LUMENS  
**944**  
RUN TIME  
UP TO  
**29h**



USB

\*Multi-battery.  
Supports also 2 CR123

## 8060

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 NiMH C (included)  
**LENGTH//**  
32.2 cm (12.67")  
**MODES//**  
High / Strobe / Medium / Low / Flashing / Self Programmable



LUMENS  
**1072**  
RUN TIME  
UP TO  
**60h**



PELI TACTICAL LIGHTS

# HEADLAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.



## 2720 HEADLAMP

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 AAA Alkaline (included)  
**LENGTH//**  
6.3 cm (2.48")  
**MODES//**  
Variable Light Output /  
Dual Red LED Night Vision



**LUMENS**  
**200**  
**UP TO**  
**RUN TIME**  
**103h**



**GESTURE**  
**ACTIVATION**  
**CONTROL**

## 2740 HEADLAMP

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 AAA Alkaline (included)  
**LENGTH//**  
5.7 cm (2.25")  
**MODES//**  
High / Low /  
Flashing / Red LED



**LUMENS**  
**66**  
**UP TO**  
**RUN TIME**  
**21h**

## 2750 HEADLAMP

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 AAA Alkaline (included)  
**LENGTH//**  
5.7 cm (2.25")  
**MODES//**  
High / Low / Flashing /  
Red LED / Low Battery Warning



**LUMENS**  
**259**  
**UP TO**  
**RUN TIME**  
**11h**

■ (Photoluminescent)

## 2760 HEADLAMP

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 AAA Alkaline (included)  
**LENGTH//**  
5.7 cm (2.25")  
**MODES//**  
High / Medium / Low / Downcast /  
Flashing / Red LED / Full-time Battery  
Level Indicator



**LUMENS**  
**289**  
**UP TO**  
**RUN TIME**  
**11h**

## 2780R HEADLAMP



**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
1 Lithium-Ion 18650 (included)  
**LENGTH//**  
7.6 cm (3.00")  
**MODES//**  
High / Medium / Low /  
Downcast / Spot / Flashing  
Full-time Battery Level Indicator



**LUMENS**  
**558**  
**UP TO**  
**RUN TIME**  
**7h 30m**

■ (Photoluminescent)  
3 Interchangeable Covers Included



Photo by Alan Rouan

PELI HEADLAMPS

PELI HEADLAMPS

# LIGHT MOUNTING SYSTEMS AND HOLSTERS



	CAT. NO. 7070RWH	CAT. NO. 7116	CAT. NO. 7106	CAT. NO. 7606	CAT. NO. 7607	CAT. NO. 7616 CAT. NO. 7617	CAT. NO. 7627
<b>HOLDER STYLES</b>							
CAT. NO.							
7060							
7070R	•						
7100			•				
7110		•					
7600				•	•		
7610						•	
7620							•

	CAT. NO. 0770C, UNIV.	CAT. NO. 0782 ALL IN	CAT. NO. 0783 DOUBLE DOWN	CAT. NO. 2748Z0
<b>LIGHT AND HEADLAMP HOLDER STYLES</b>				
CAT. NO.				
2390	•			
2410	•			
2460	•			
2745Z0				•
2755Z0				•
2765Z0				•
3310	•	•		
3315	•	•		
All Headlamps			•	

## PELI LIGHTING TOOLS: MORE THAN A FLASHLIGHT.

Here are just a few features that make our lighting tools shine:

**SELF PROGRAMMABLE**  
(On selected models only)

**GESTURE ACTIVATION**  
(On selected models only)

**USB RECHARGEABLE**  
(On selected models only)

**PHOTOLUMINESCENT DESIGNS**  
(On selected models only)

**PIVOTING 60° HEAD**  
(On selected models only)

**DOWNCAST LIGHTING FEATURES**  
(On selected models only)

**LEGENDARY LIFETIME\* GUARANTEE**

\*Lifetime guarantee not applicable where prohibited by law.

	CAT. NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
<b>SMALL LIGHTS</b>	1910	1 AAA Alkaline <sup>A</sup>	0.043	9.7	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
	1920	2 AAA Alkaline <sup>A</sup>	0.062	14	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
	1930	4 LR 44 Alkaline <sup>A</sup>	0.026	6.7	12	4h 15m	17	70	IPX4	CI, D1/CII, D2 IECEx ia	■ ■
<b>MEDIUM TORCHES</b>	2010	3 C Alkaline	0.38	20.6	161	22h	160	6398	IPX7	CI II III, D1 IECEx ia	■
	2410	4 AA Alkaline <sup>A</sup>	0.207	17.8	126	7h 30m	161	6500	IPX7	CI II III, D1 IECEx ia	■
	2460	4 Ni-MH <sup>A</sup>	0.221	17.8	183	5h	179	8050	IPX7	CI II, D2	■
	3310PL	3 AA Alkaline <sup>A</sup>	0.176	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline <sup>A</sup>	0.176	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8 (1m)	N/A	■ (photoluminescent)
	5000	2 AAA Alkaline <sup>A</sup>	0.068	14.2	202*, 21**	1h 15m*, 7h**	69*, 21**	1176*, 111**	IPX8 (1m)	N/A	■
	5010	2 AA Alkaline <sup>A</sup>	0.145	15.9	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8 (1m)	N/A	■
	5020	4 AAA Alkaline	0.207	14.9	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8 (1m)	N/A	■
	5050R	1 18650 Lithium <sup>A</sup>	0.164	15.6	393*, 21***, 883****	2h 30m*, 40h**	134*, 30***, 201****	4488*, 224**, 10093****	IPX8 (1m)	N/A	■
	<b>LARGE LIGHTS</b>	9410L	6 Lithium-ion 18650 <sup>A</sup>	1.267	22.2	2207*, 463***	3h 15m*, 11h***	453*, 207***	51304*, 10710***	IPX4	N/A

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Boost | <sup>A</sup> Batteries Included | Additional approvals may apply. For details go to [www.peli.com](http://www.peli.com)

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUNTIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	APPROVALS	COLOURS
1930Z0	4 LR 44 Alkaline <sup>A</sup>	0.026	6.7	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	■
1975Z0	2 AAA Alkaline <sup>A</sup>	0.054	14.6	117	2h 15m	24	141	IP68	II 1 G Ex ia op is IIC T4 Ga	■
1975Z1	2 AAA Alkaline <sup>A</sup>	0.054	14.6	94	8h 15m	22	122	IP68	II 2 G Ex ib op is IIB T4 Gb	■
2010Z0	3 C Alkaline	0.38	20.6	129	22h	135	4582	IPX7	II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135c T200c Da IP6X	■
2220Z1	2 CR2032 Lithium <sup>A</sup>	0.028	8.9	9	34h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	■ ■
2315Z0	2 AA Alkaline <sup>A</sup>	0.13	15.8	115	6h	75	1403	IPX8	II 1 G Ex ia op is IIC T4 Ga, II 2 G Ex ib op is IIC T4 Gb	■
2410Z0	4 AA Alkaline <sup>A</sup>	0.207	17.8	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
2460Z1	4 AA Ni-MH <sup>A</sup>	0.221	17.8	181	5h	181	8235	IPX7	II 2 G Ex ib IIC T3 Gb	■
2610Z0	3 AAA Alkaline <sup>A</sup>	0.91	3.8	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	II 1 G Ex ia op is IIC T4 Ga	■
2690Z0	3 AAA Alkaline <sup>A</sup>	0.116	7.1	74	11h	92	2124	IPX7	I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T65°C Da	■
2745Z0	3 AAA Alkaline <sup>A</sup>	0.94	5.7	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■
2755Z0	3 AAA Alkaline <sup>A</sup>	0.096	5.7	115*, 58***	8h*, 16h***	61*, 43***	925*, 455***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■
2765Z0	3 AAA Alkaline <sup>A</sup>	0.096	5.7	141*, 27***	5h30m*, 14h***	78*, 9***	1512*, 22***	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■
3315Z0	3 AA Alkaline <sup>A</sup>	0.176	15.6	138	19h	146	5350	IP67	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da	■
3415MZ0	3 AA Alkaline	0.272	18.9	329 (Spot/Flood), 174 (Flood), 185 (Spot)	6h (Spot/Flood), 15h (Flood), 14h (Spot)	133 (Spot/Flood), 38 (Flood), 134 (Spot)	4425 (Spot/Flood), 354 (Flood), 4517 (Spot)	IPX8 (1m)	II 1 G Ex ia op is IIC T4 Ga	■
3610Z0	4 AA Alkaline	0.298	19.1	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
3715Z0	4 AA Alkaline	0.408	13.6	189*, 90***, 23***	4h*, 7h***, 31h***	249*, 157***, 24***	15552*, 6150***, 150***	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da	■
3765Z0	4 AA NiMH <sup>A</sup>	0.414	13.6	194*, 92***, 24***	3h 30m*, 6h 45m***, 20h***	256*, 161***, 24***	16392*, 6454***, 146***	IPX4	II 1 G Ex ia op is IIC T3 Ga	■
9415Z0	4 C NiMH <sup>A</sup>	1.65	22.2	530*, 202***	4h 30m*, 11h 30m***	272*, 166***	18480*, 6914***	IPX4	II 1 G Ex ia IIC T4 Ga	■

 \*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>A</sup> Batteries Included | Additional approvals may apply. For details go to www.peli.com

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
7000	2 CR123 Lithium <sup>A</sup>	0.159	13.5	774*, 457**, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■
7060	1 Lithium-Ion <sup>A</sup>	0.295	22	402*, 162**, 18***	3h 30m*, 12h**, 57h***	210m*, 131m**, 45m***	11078*, 4312**, 500***	IPX4	N/A	■
7600	1 Lithium-Ion 18650 <sup>A</sup>	0.196	15.7	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8 (1m)	N/A	■
8060	4 C NiMH <sup>A</sup>	0.658	32.2	1072*, 551**, 29***	3h 45m*, 4h 15m**, 60h***	376*, 265**, 60***	35300*, 17520**, 889***	IPX6	N/A	■
2720	3 AAA Alkaline <sup>A</sup>	0.108	6.3	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
2740	3 AAA Alkaline <sup>A</sup>	0.094	5.7	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
2750	3 AAA Alkaline <sup>A</sup>	0.096	5.7	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)
2760	3 AAA Alkaline <sup>A</sup>	0.096	5.7	289*, 156**, 97***, 42***	1h 30m*, 3h 15m**, 5h 30m***, 11h***	101*, 66**, 48***, 19***	2540*, 1097**, 567***, 88***	IPX4	N/A	■
2780R	1 Lithium-Ion 18650 <sup>A</sup>	0.207	7.6	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ □ (photoluminescent)

TACTICAL LIGHTS

HEAD LAMPS

 \*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>A</sup> Batteries Included | Additional approvals may apply. For details go to www.peli.com

**SMALL LIGHTS** PGS 06

**1910**

**1920**

**1930**

**MEDIUM TORCHES** PGS 07 - 08

**2010**

**2410**

**2460**

**3310PL**

**3310ELS**

**MEDIUM TORCHES** PGS 07 - 08

**5000**

**5010**

**5020**

**5050R**

**LARGE LIGHTS** PGS 09

**9410L**

**ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2)** PGS 10 - 13

**1930Z0**

**1975Z0**

**1975Z1**

**ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2)** PGS 10 - 13

**2010Z0**

**2220Z1**

**2315Z0**

**2410Z0**

**2460Z1**

**2610Z0**

**2690Z0**

**2745Z0**

**ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2)** PGS 10 - 13

**2755Z0**

**2765Z0**

**3315Z0**

**3415MZ0**

**3610Z0**

**3715Z0**

**3765Z0**

**9415Z0**

**TACTICAL LIGHTS** PGS 14 - 15

**7000**

**7060**

**7600**

**8060**

**HEADLAMPS** PGS 16 - 17

**2720**

**2740**

**2750**

**2760**

**2780R**


\*Only available upon minimum order quantities

# LEARN MORE ABOUT + OUR PRODUCTS



[www.peli.com](http://www.peli.com)



AVAILABLE IN 18 LANGUAGES!

[www.pelicatalogue.com](http://www.pelicatalogue.com)



[www.peli.com/webinars](http://www.peli.com/webinars)



## EMEA

### EUROPE, MIDDLE EAST & AFRICA HEADQUARTERS

PELI PRODUCTS, S.L.U.  
C/ Provença, 388 Planta 7  
08025 • Barcelona, Spain  
Tel +34 934 674 999  
Fax +34 934 877 393  
[www.peli.com](http://www.peli.com)

### FRANCE

PELI PRODUCTS FRANCE  
S.A.S.  
20/22 Rue des Petits Hôtels  
75010 Paris, France  
Tel +33 (0)1 44 83 95 63  
Fax +33 (0)1 44 83 95 68  
[www.peli.com](http://www.peli.com)

### UK

PELI HARDIGG UK  
Unit 4, Brookfield Industrial Estate  
Leacon Road  
Ashford Kent TN23 4TU  
Tel + 44 (0) 1233 895 895  
Fax +44 (0) 1233 895 899  
[www.peli.com](http://www.peli.com)

## U.S.A.

### U.S.A. & GLOBAL HEADQUARTERS

23215 Early Avenue  
Torrance, CA 90505 USA  
Tel 310.326.4700  
800.473.5422 (Outside CA)  
Fax 310.326.3311  
[www.pelican.com](http://www.pelican.com)

### GERMANY

PELI PRODUCTS GERMANY GmbH  
Düsseldorf Kö-Bogen  
Business Center  
Königsallee 2b, 5th Floor  
40212 Düsseldorf, Germany  
Tel +49 (0) 211 882 42 401  
Fax +49 (0) 211 882 42 200  
[www.peli.com](http://www.peli.com)

### UAE

PELICAN PRODUCTS FZE  
JAFZA One Building A office 1511/1512  
Jebel Ali Free Zone gate 5  
P.O.Box 261008  
Dubai – United Arab Emirates  
Tel +971 4 8876550  
Fax +971 4 8876549  
[www.pelican.com](http://www.pelican.com)  
[www.peli.com](http://www.peli.com)

### TURKEY

PELI PRODUCTS ANKARA  
BRANCH OFFICE  
Beştepe Mahallesi,  
Nergis Sokak No:7/2  
Via Flat İş Merkezi,  
Plaza Cubes No:87  
Tel +90 312 248 13 86  
[www.peli.com](http://www.peli.com)

### PELICAN HARDIGG

147 North Main Street  
South Deerfield, MA 01373  
Tel (800) 542 73 44  
Fax (413) 665 8330  
[www.pelican.com](http://www.pelican.com)

\* We also have offices in Canada, Japan, China, Australia, South Korea and India

#### PELI LIMITED LIFETIME\* WARRANTY

Peli Products, S.L.U. ("Peli") guarantees its lights and headlamps for a lifetime\* against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see [www.peli.com/WARRANTY](http://www.peli.com/WARRANTY)

\* Lifetime guarantee not applicable where prohibited by law.

#### Distributed by:



©2022 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit [www.peli.com](http://www.peli.com) and [www.pelicatalogue.com](http://www.pelicatalogue.com).  
Part No. 0030-000-501E JAN. 22

Follow us on:

#### PELInsights



Check out our latest posts on Peli Lights, get to know our Pro Users and take part in our different programs.

This and more on the brand new PELI blog!



#### Learn all about ATEX Directive 2014/34/EU

