




CARGO CASE ROOF MOUNT, GEN 2 (RFMT2)

UNIVERSAL

SINCE 1976



For **BX90R, BX140R, BX55S, BX85S** CARGO Cases On Platform Roof Racks w Extruded Aluminum T-slot bars. Also fits Tubular-Style Roof Racks using Pelican accessory kit RFMTTC-002-BLK U-Bolt Clamp Kit.

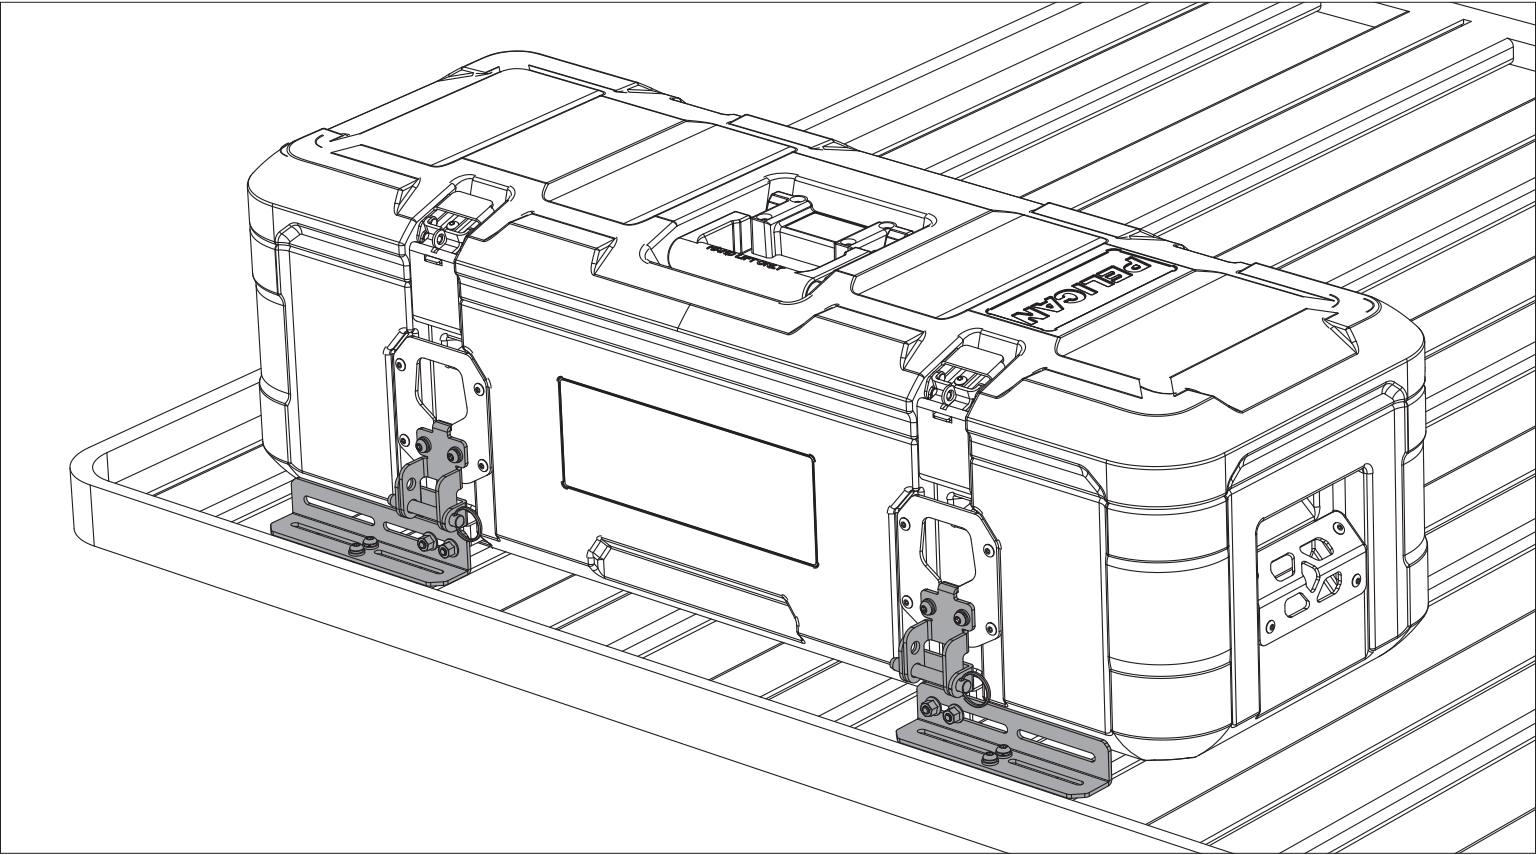

READ ME!

THANK YOU FOR PURCHASING A PELICAN CARGO ROOF MOUNTING KIT. THIS KIT IS USED FOR BOTH T-SLOT PLATFORM RACKS (AS-IS) OR FOR TUBULAR RACKS (WITH THE ACCESSORY U-BOLT KIT). BEFORE YOU START, TAKE A MOMENT TO FAMILIARIZE YOURSELF WITH THE FITTING INSTRUCTIONS AND THE COMPONENTS RECEIVED. REFER TO PAGE 2 FOR A LIST OF ALL THE COMPONENTS, QUANTITIES AND TOOLS REQUIRED.

- NOTE: DESIGNED FOR BX90R, BX140R, BX55S & BX85S CASES MOUNTED LENGTHWISE (FRONT-TO-REAR OF VEHICLE) ON RACKS WITH BARS RUNNING ACROSS ROOF WIDTH. ALTERNATE ORIENTATIONS WILL LIMIT CASE SIZE SELECTION, OR PROHIBIT MOUNTING..

- NOTE: CASE MAY BE MOUNTED ON HINGE OR LATCH SIDE, ACCORDING TO ACCESS PREFERENCE- FROM OUTSIDE OR MIDDLE OF RACK.



IMPORTANT WARNING!

It is critical that Pelican™ Cargo Mounts and Cases be properly installed and securely attached to your vehicle. Failure to properly secure the mounts and cases to your vehicle could result in serious injury and even death. You are responsible for the fitment of the mounts and Cargo Cases to your vehicle. You must therefore periodically inspect the equipment for wear and damage. Replace if in doubt. If you have limited mechanical experience you should not attempt to install the equipment. You should have the equipment installed by a professional installer if you have any doubts about your abilities.

It is imperative that the user check the security of the cases to the vehicle after an initial brief period of driving and adjust if required. Pelican recommends the user do so periodically and, if road conditions change (i.e. freeway to dirt "road)" again check the security of the attachment of the Case to the vehicle.



LATCHES AND MOUNTING KIT CARE

Periodically check the latches and mounting hardware to ensure there are no loose parts. Continual exposure to daylight may cause the black hardware finish to dull. To maintain the glossy finish, occasionally apply a light coat of UV protectant. After exposure to salty coastal climates or snowy regions, rinse off the mounts with water to remove salt deposits. To help prevent corrosion, apply a silicone-based oil or spray to nuts and bolts.

PELICAN™ CARGO CASES AND MOUNTS LIMITED LIFETIME WARRANTY (CASES) AND THREE YEAR WARRANTY (MOUNTS)

Pelican Products, Inc. ("Pelican") guarantees its Pelican™ Cargo cases for a lifetime against breakage or defects in workmanship. This lifetime warranty does not cover mounting hardware, which Pelican warrants against defects in materials and workmanship for three years from the date of purchase. To the extent permitted by law, Pelican's liability is limited to the case and not its contents and in no event shall Pelican's liability to the purchaser for damages exceed the purchase price of the case in respect of which damages are claimed.

TO THE EXTENT PERMITTED BY LAW: (A) THIS WARRANTY IS IN LIEU OF ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE; (B) ALL OTHER IMPLIED WARRANTIES AND ANY LIABILITY NOT BASED UPON CONTRACT ARE HEREBY DISCLAIMED AND EXCLUDED; AND (C) IN NO EVENT SHALL PELICAN BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR SPECIAL DAMAGES, REGARDLESS OF WHETHER A CLAIM FOR SUCH DAMAGES IS BASED ON WARRANTY, CONTRACT, NEGLIGENCE OR OTHERWISE .

With valid dated proof of purchase, Pelican will either repair or replace any broken or defective product, at our sole option. Certain products are available for a limited time only. If a claim is made involving one of these products, Pelican reserves the right to replace a broken or defective product with a standard Pelican product of comparable size and quality if no comparable limited edition product is available at the time of a claim. TO THE EXTENT PERMITTED BY LAW, THIS SHALL BE THE SOLE AND EXCLUSIVE REMEDY OF THE PURCHASER.

To make a warranty claim, the purchaser must complete the warranty claim form at <https://www.pelican.com/us/en/support/warranty/>. Any warranty claims shall be made by the purchaser as soon as practicable and, with respect to the mounts and related hardware, no later than three years from the date of purchase. The purchaser must provide valid dated proof of purchase and obtain a return authorization number from Pelican Customer Service prior to returning any product, and is responsible for paying for all warranty freight costs. If Pelican determines that any returned product is not defective, within the terms of this warranty, the purchaser shall pay Pelican all costs of handling, return freight and repairs at Pelican's prevailing rates.

This warranty does not cover normal wear and tear including but not limited to scratches, dents or tears, aesthetic surface damage which may be caused by oxidation or by the natural breakdown of colors caused by exposure to the elements. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Some states and countries do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state and country to country.

In Australia: The benefits provided to you under this warranty are in addition to your rights and remedies as a consumer under the Australian Consumer Law as contained in the Competition and Consumer Act 2010 (Cth) ("the Act"). Nothing in this warranty limits the rights or obligations of a party under the Act in relation to the supply to consumers of goods which cannot be limited, modified or excluded. If applicable, our goods come with guarantees that cannot be excluded under the Act. Consumers are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. Consumers are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. If you are not a consumer under the Act, then your rights may be limited. To make a warranty claim, the purchaser may contact Pelican Products Australia, Suite 2.33, West Wing, Platinum Bldg., Erina NSW 2250, Tel: +612 4367 7022, or email: info.australia@pelican.com. Any claims should be made as soon as practicable. To expedite claims, the purchaser should obtain a return authorization number from Pelican Customer Service prior to returning any product. The purchaser is responsible for paying for all freight costs. If Pelican determines that any returned product is not defective, within the terms of this warranty or the Act, the purchaser may pay Pelican all costs of handling, return freight and repairs at Pelican's prevailing rates. In the event that Pelican determines that any returned product is defective, within the terms of this warranty or the Act, Pelican shall pay the purchaser all reasonable costs of the purchaser in making a claim under this warranty.

Lifetime warranty does not cover Vault by Pelican or Roto Molded cases or fabric portion of backpacks.

1

GET ORGANIZED


PARTS LIST

ITEM NO.	DESCRIPTION	QTY.
1	MOUNTING BRACKET	4
2	PINNED YOKE	2
3	FIXED HOOK	2
4	CASE PLATE CLAMP	2
5	QUICK-RELEASE PIN	2
6	LANYARD	2
7	M6-1.0 X 16 CARRIAGE BOLT	8
8	M6-1.0 NYLON LOCK FLANGE NUT	8
9	M6-1.0 X 14 BUTTON HEAD HEX DRIVE SCREW	12
10	M6 FLAT WASHER	12
11	M6 SPLIT LOCK WASHER	12
12	SINGLE T-NUT, M6/M8 T-SLOTS	8
13	DOUBLE T-NUT, M10 SLOTS	4

TOOLS REQUIRED*




M10 WRENCH/SOCKET




M4 ALLEN KEY/ DRIVER

* Tools not included.

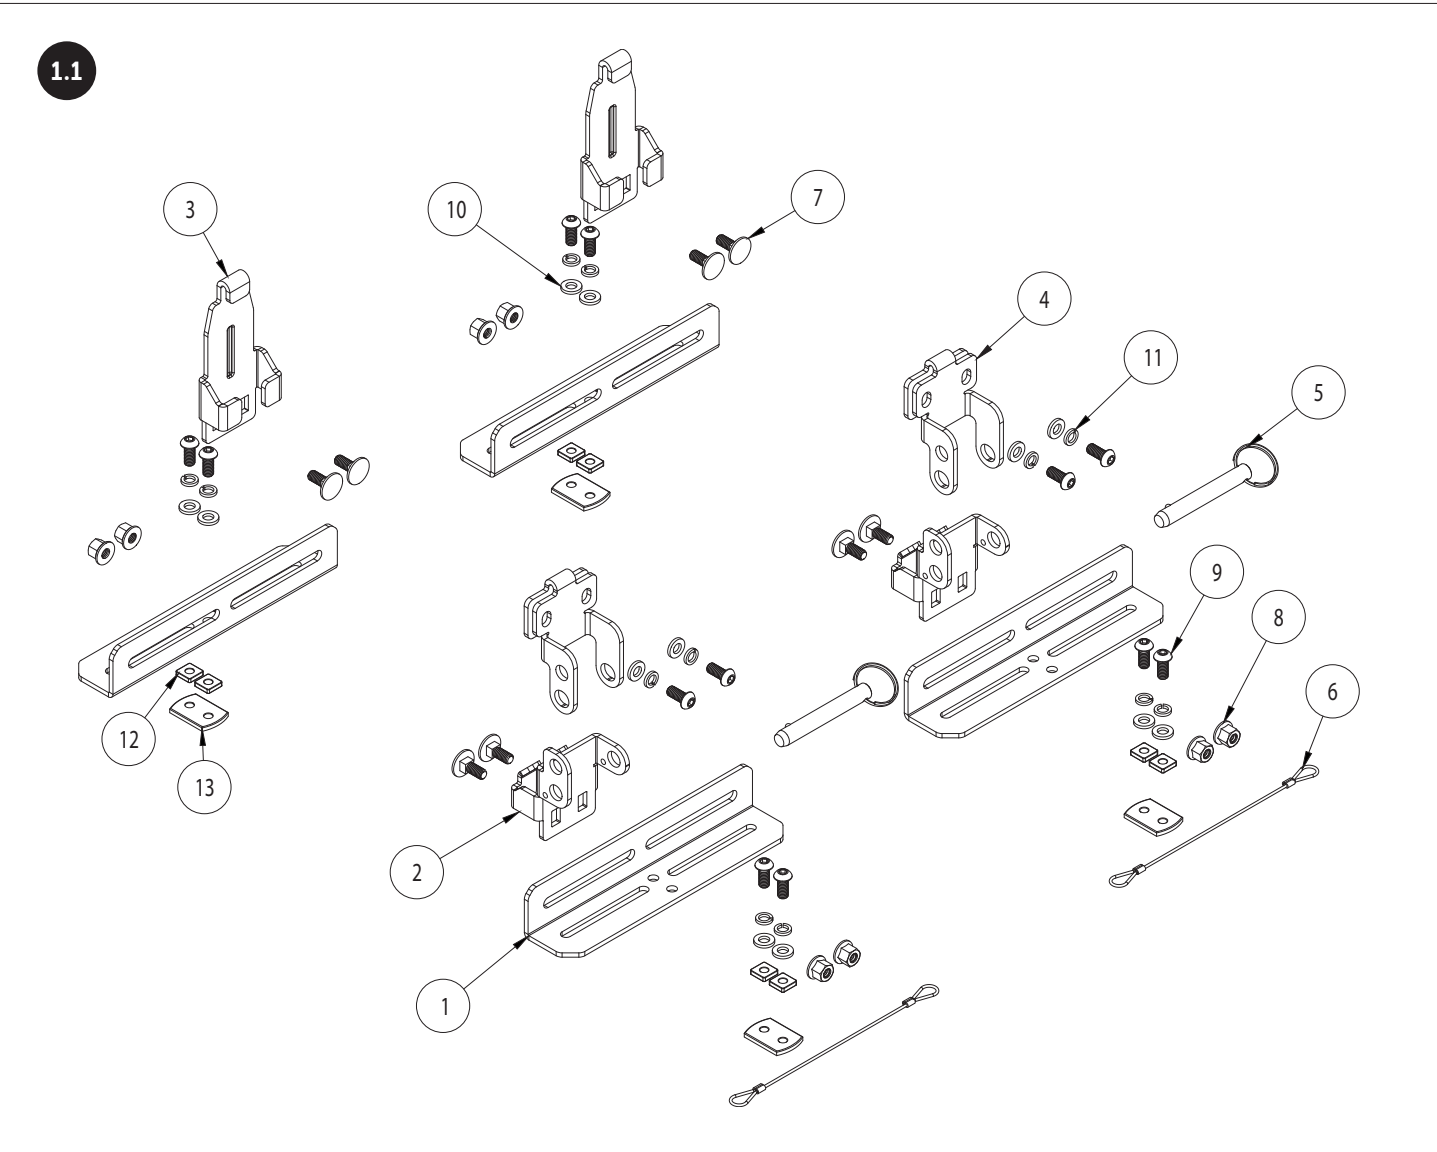


6


ASSEMBLE LANYARDS

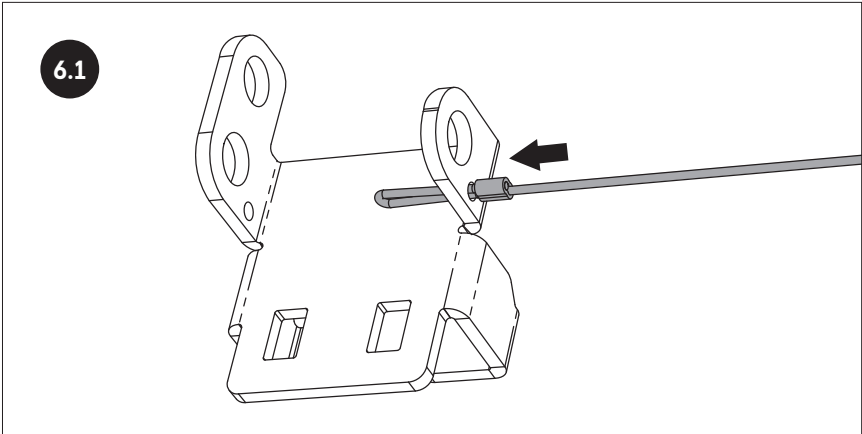


1. SQUEEZE END OF LANYARD AND PUSH THROUGH HOLE IN PINNED YOKE

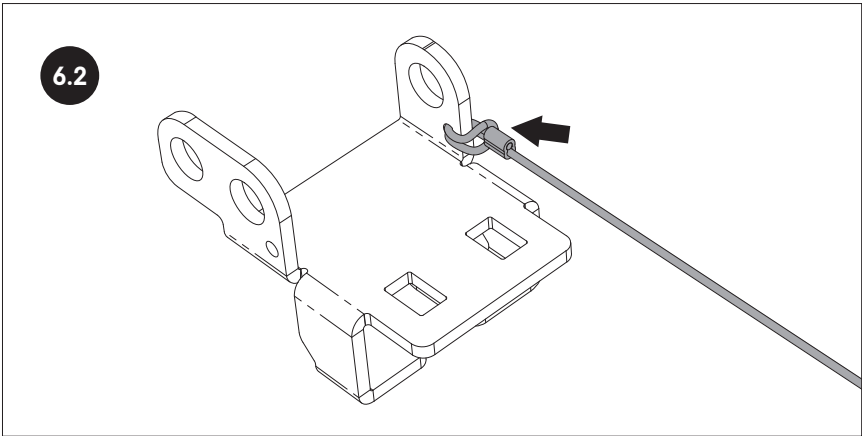

2. FEED OTHER END BACK THROUGH LOOP. PUSH PAST CRIMP EDGE TO SECURE, AS SHOWN.

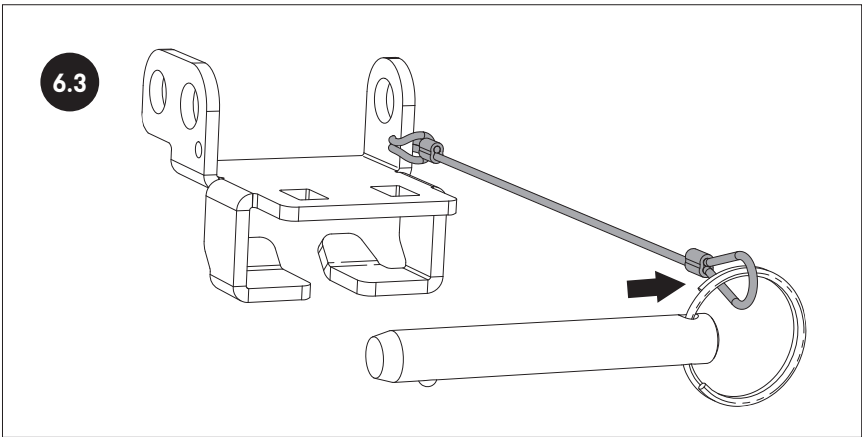






3. ATTACH LOOSE END TO KEY-RING OF QUICK RELEASE PIN. REPEAT FOR OTHER LANYARD.

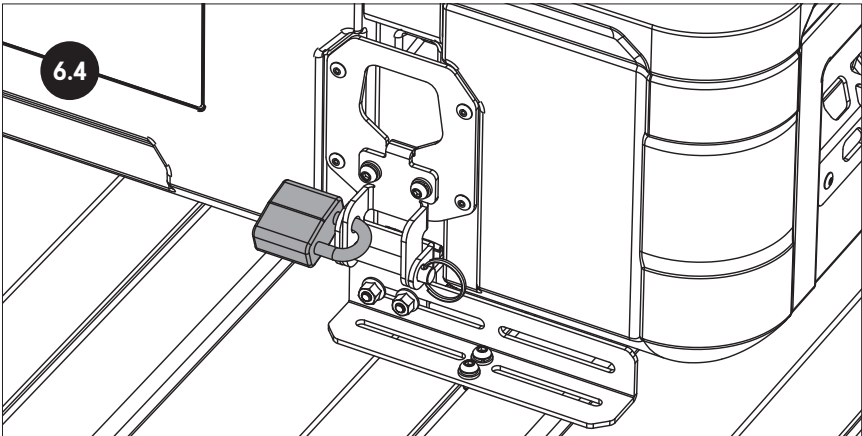

TO SECURE CARGO CASE AGAINST THEFT

PADLOCK ONE OR BOTH PINNED MOUNTS (PADLOCK SOLD SEPARATELY).

5 FIT & SECURE

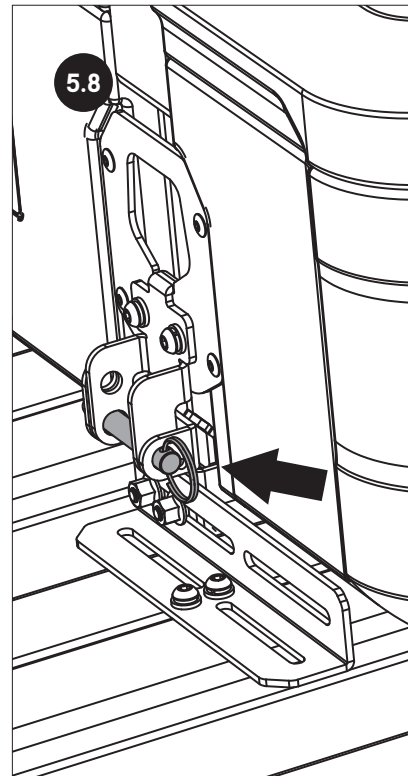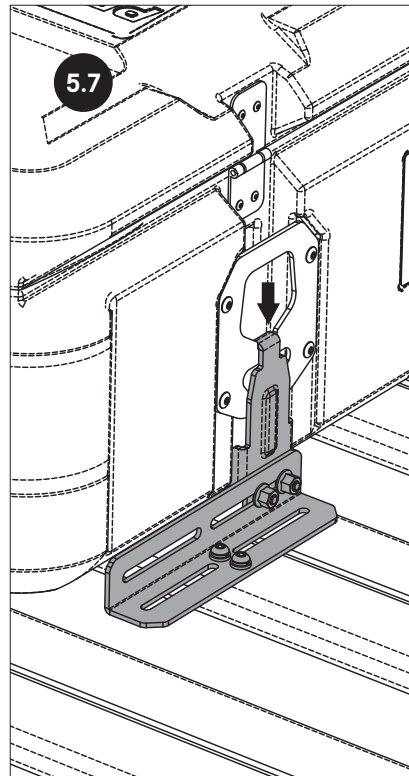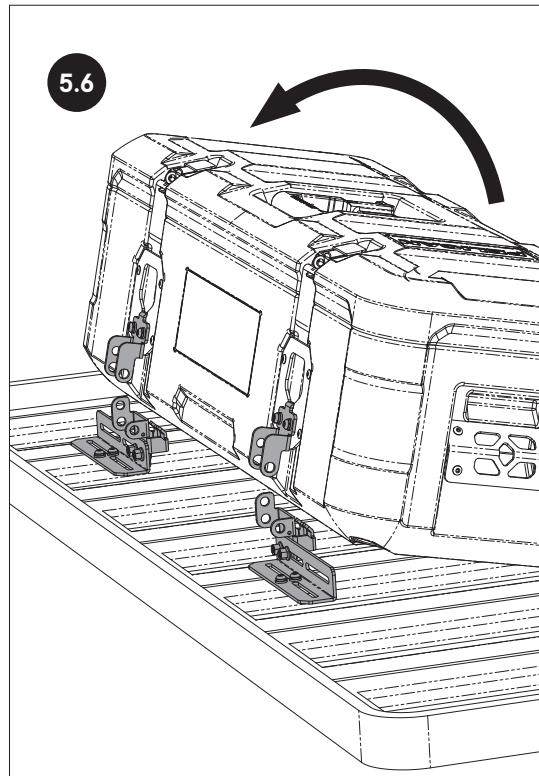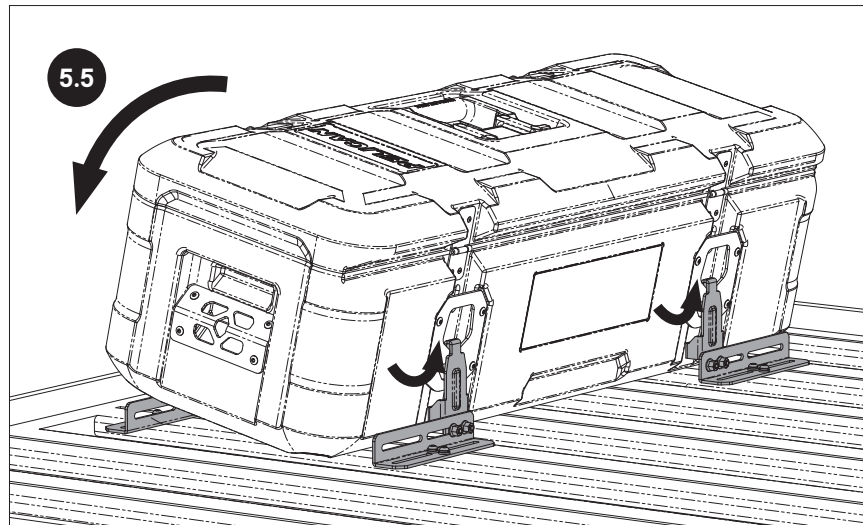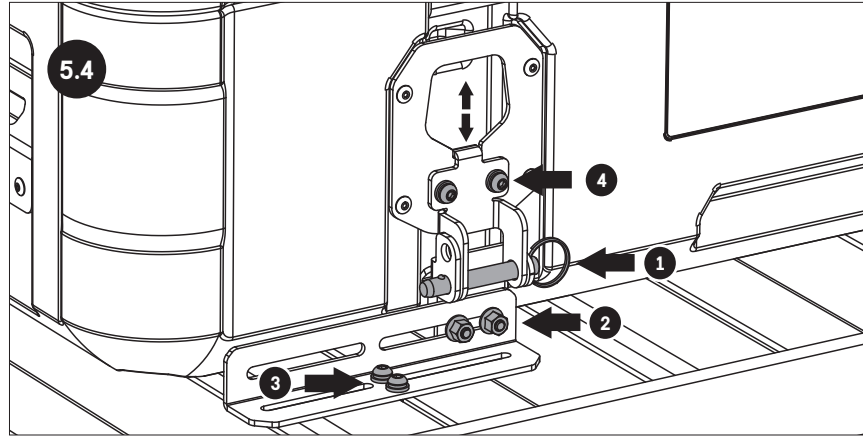

ADJUST/TIGHTEN PINNED MOUNTS LAST

1. INSERT QUICK RELEASE PINS AS SHOWN. WITH FASTENERS LOOSE, ALIGN ALL PARTS.
2. FIRST TIGHTEN HEX NUTS WITH M10 SOCKET/WRENCH.
3. NEXT TIGHTEN THE MOUNTING BRACKET SCREWS TO THE RACK WITH M4 ALLEN TOOL.
4. FINALLY, ADJUST VERTICAL POSITION OF PLATE CLAMP TO ALLOW EASY INSERTION OF QUICK RELEASE PIN, AND TIGHTEN SCREWS WITH M4 ALLEN TOOL.

LOADING CARGO CASE ON ROOF MOUNTS

LOWER THE CASE WITH ITS BACK EDGE RESTING ON ROOF RACK. VISUALLY LINE UP PLATE CLAMPS WITH MOUNT YOKES.

ROTATE FRONT EDGE OF CASE DOWN INTO POSITION ON THE PIN YOKES.

THIS WILL ENGAGE FIXED HOOKS AT REAR. CHECK HOOK ENGAGEMENT.




INSERT QUICK RELEASE PINS

2 INSTALL CASE PLATE CLAMPS

OPTIMALLY MOUNT TO PLATES ON THE LATCHES SIDE OF CASE FOR EASY LID OPENING FROM SIDE OF VEHICLE.


USING M4 ALLEN DRIVE TOOL, ASSEMBLE CLAMPS TO PLATES USING M6 SCREWS, WITH LOCK WASHERS AND FLAT WASHERS AS SHOWN. PARTIALLY TIGHTEN SCREWS ONLY TO ALLOW FINAL ADJUSTMENT.

REPEAT FOR 2ND MOUNTING PLATE ON SAME SIDE OF CASE.

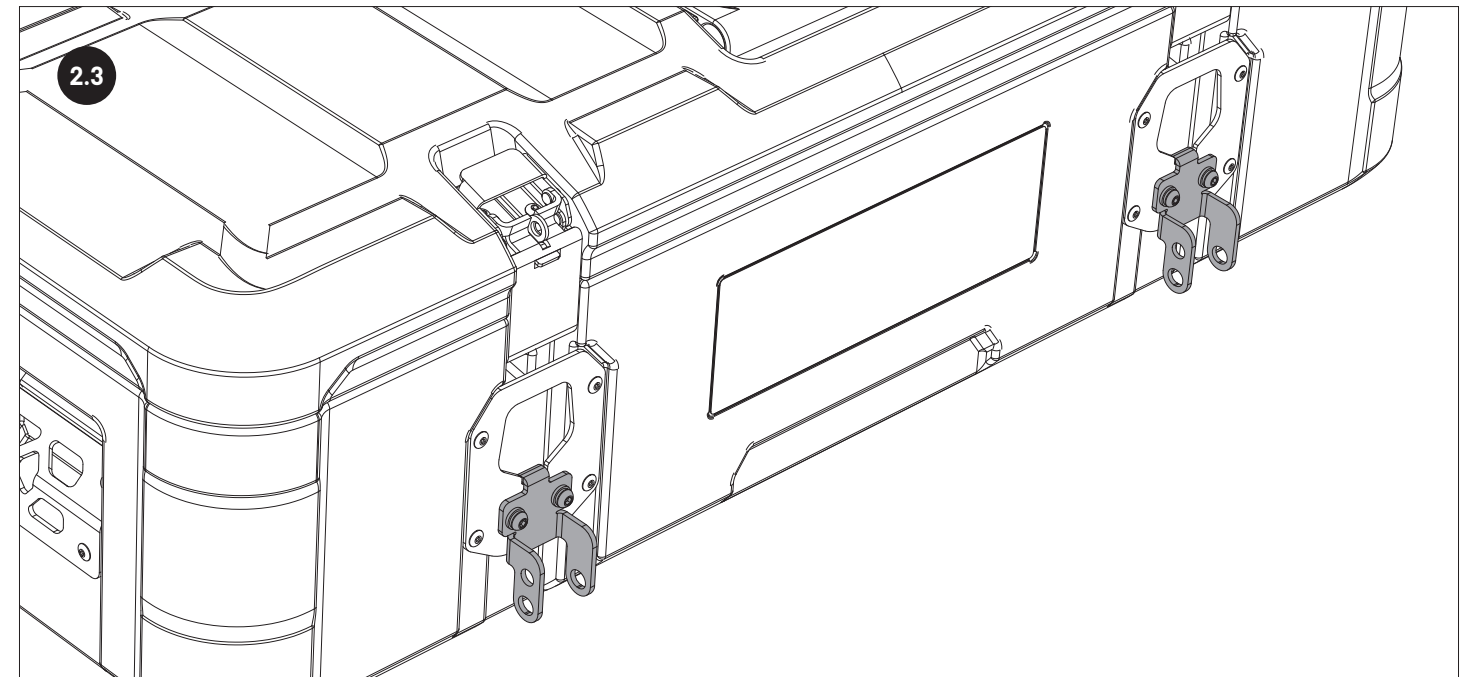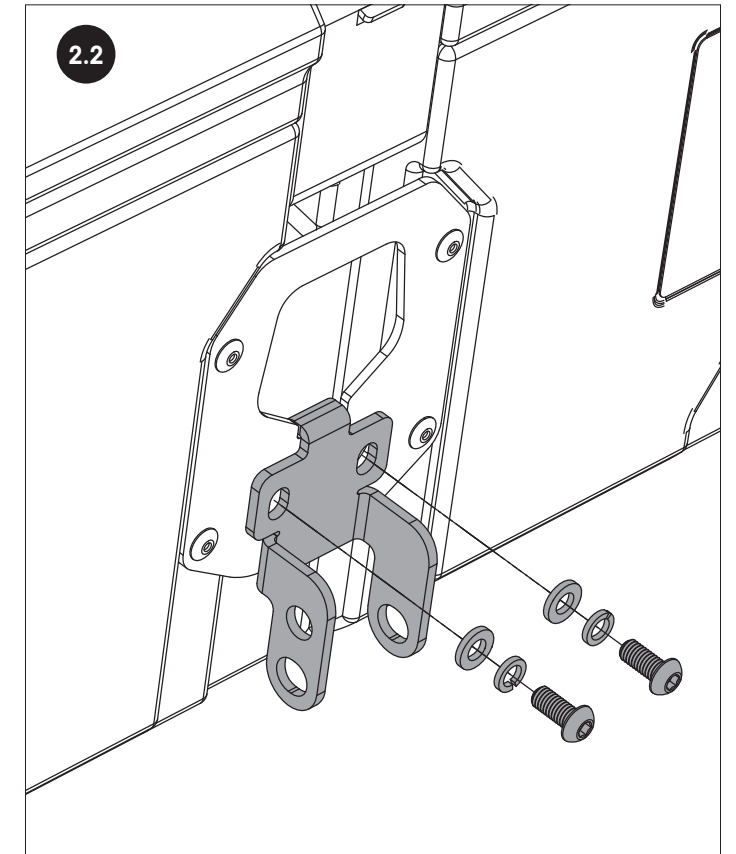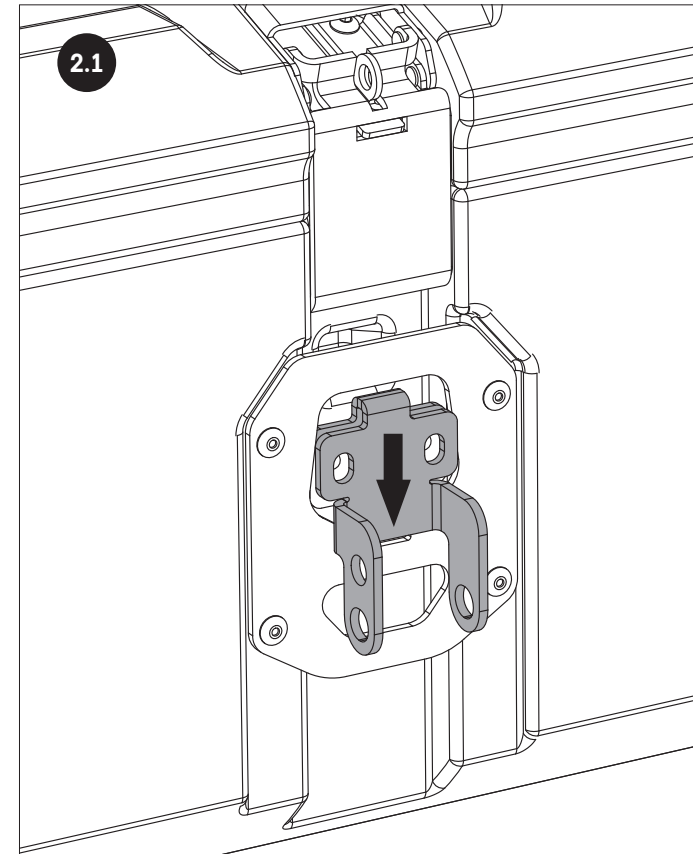

3 UPPER AND LOWER MOUNTS ASSEMBLY

3.1

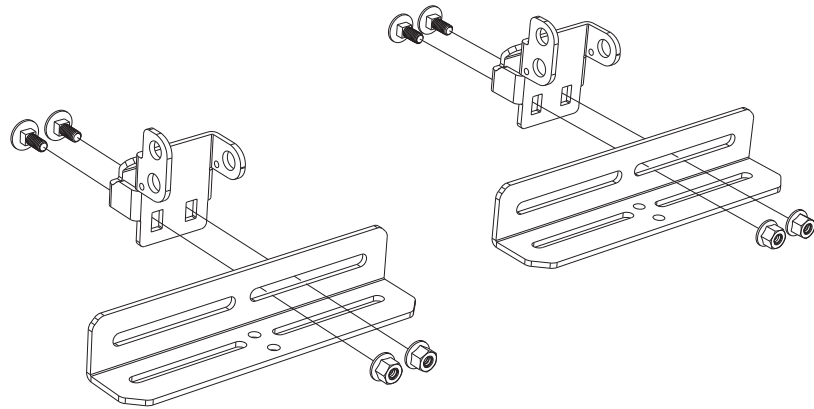


ASSEMBLE TWO PINNED BRACKET ASSEMBLIES AS SHOWN, USING M6 CARRIAGE BOLTS AND LOCKNUTS. ONLY PARTIALLY TIGHTEN NUTS TO ALLOW FINAL ADJUSTMENT WITH CASE POSITION.

NOTE: YOU MAY NEED TO REPOSITION THE PINNED YOKE TO THE LEFT OR RIGHT SLOTS LATER FOR DESIRED PLACEMENT OF CASE ON RACK.

4 PRELIMINARY MOUNTING TO CASE CLAMPS

4.1

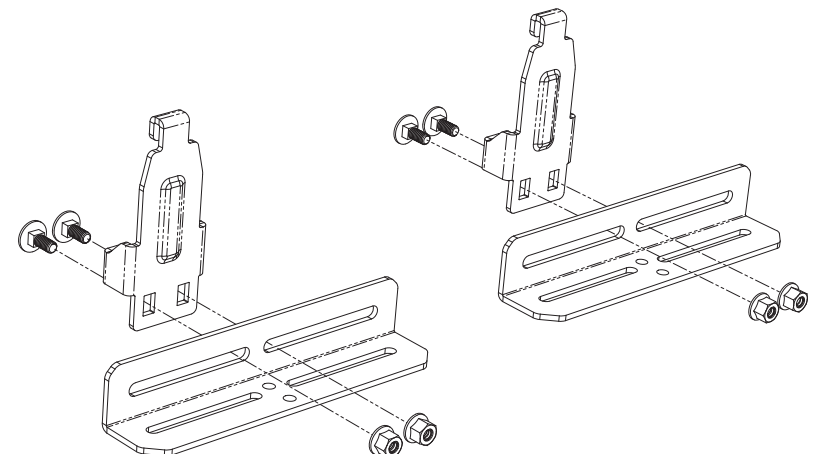


ASSEMBLE TWO FIXED BRACKET ASSEMBLIES AS SHOWN, USING M6 CARRIAGE BOLTS AND LOCKNUTS. ONLY PARTIALLY TIGHTEN NUTS TO ALLOW FINAL ADJUSTMENT WITH CASE POSITION.

NOTE: YOU MAY NEED TO REPOSITION THE FIXED HOOK TO THE LEFT OR RIGHT SLOTS LATER FOR DESIRED PLACEMENT OF CASE ON RACK.

5 FIT & SECURE


5.1

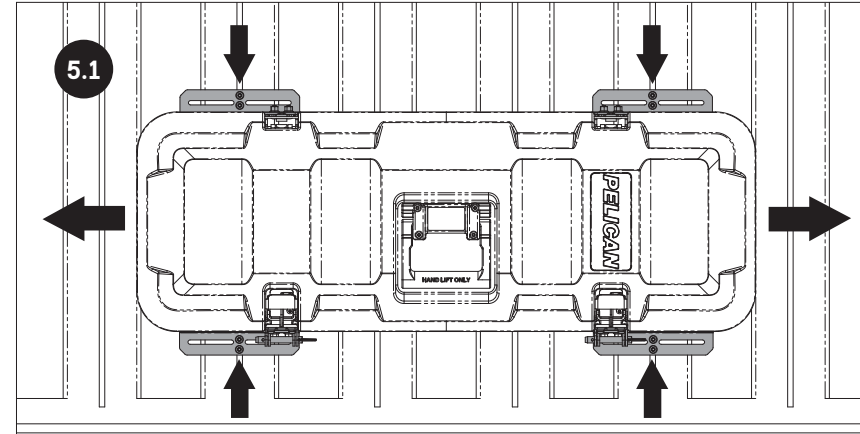

PLACE CARGO CASE IN DESIRED POSITION ON YOUR ROOF RACK.

WITH THE 4 MOUNTS PLACED LOOSELY IN THE CASE PLATE RECESSES AS SHOWN, ADJUST MOUNT HOOKS/YOKES IN THEIR SLOTS AND POSITION MOUNTING BRACKETS AS NEEDED TO ALIGN WITH CROSSBAR T-SLOTS.

5.2

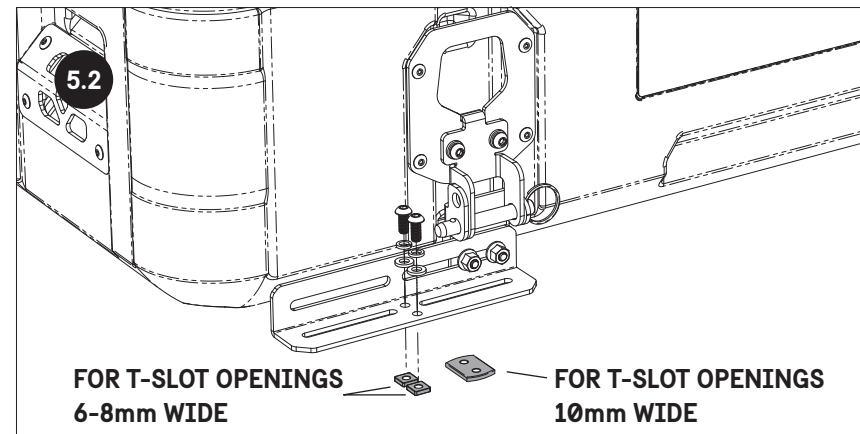


INSERT M6 SCREWS WITH FLAT AND LOCK WASHERS INTO THE 4 MOUNTING BRACKETS.

USE THE 8 SINGLE T-NUTS FOR T-SLOT OPENINGS 6-8MM WIDE, OR 4 DOUBLE T-NUTS FOR 10-11MM SLOT OPENINGS.

ONLY PARTIALLY TIGHTEN BRACKETS TO RACK TO ALLOW FINAL ADJUSTMENT.

REPEAT FOR EACH OF THE 4 BRACKETS.

5.3

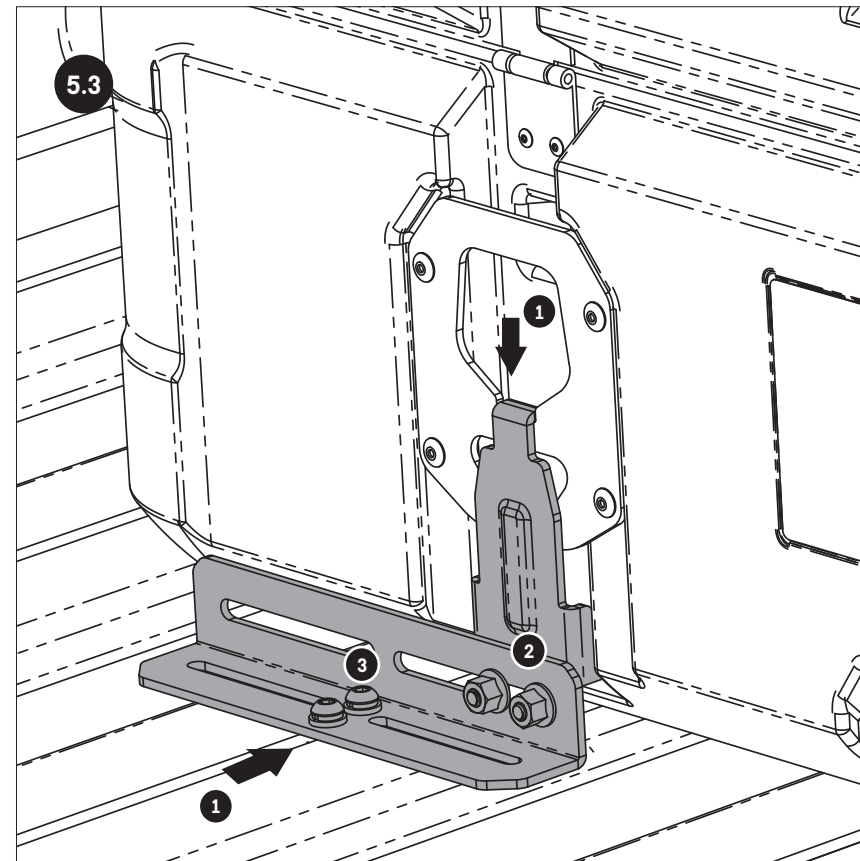

TIGHTEN THE TWO FIXED HOOK MOUNTS FIRST

1. ADJUST THE FIXED HOOK MOUNT AGAINST THE CASE WITH HOOK RESTING IN THE CASE PLATE SLOT.

2. TIGHTEN THE 2 HEX NUTS WITH AN M10 SOCKET/WRENCH.

3. TIGHTEN THE 2 ALLEN SCREWS NEXT, TO SECURE BRACKET TO THE RACK.

REPEAT FOR THE OTHER FIXED HOOK BRACKET.